

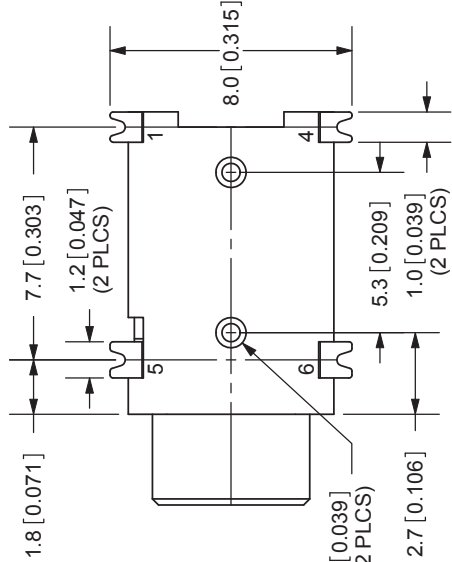
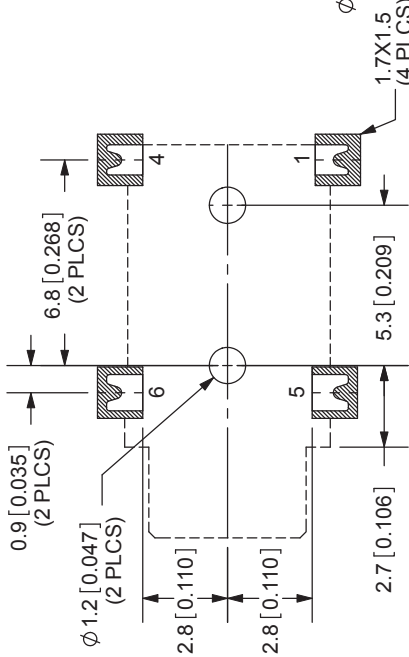
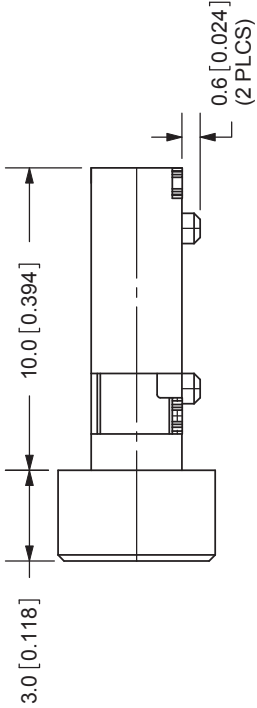


REV.	DESCRIP
A	NEW DRAWING
B	updated PCB
C	added TR package

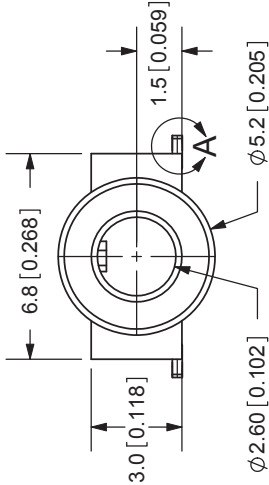


Note:
Add suffix "TR" to
tape & reel packag

TOLERANCE:
X.X ±0.3mm
X.XX ±0.2mm




SPECIFICATIONS:
RATING: 16V DC @ 300mA
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -40 ~ +85C



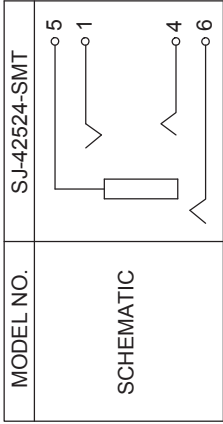


TERMINAL 1	MATERIAL	PLATING
TERMINAL 4	Titanium Copper	Silver
TERMINAL 5	Titanium Copper	Silver
TERMINAL 6	Phosphor Bronze	Silver
HOUSING	Brass	Gold
	PBT	

REV.	DESCRIP
A	NEW DRAWING
B	updated PCB
C	added TR package



Coplanarity

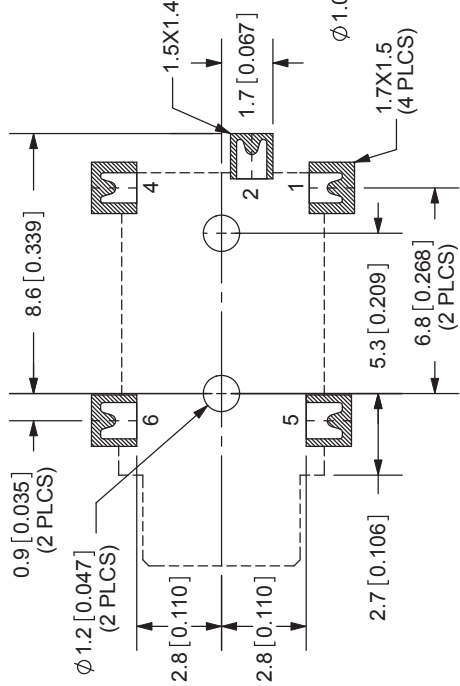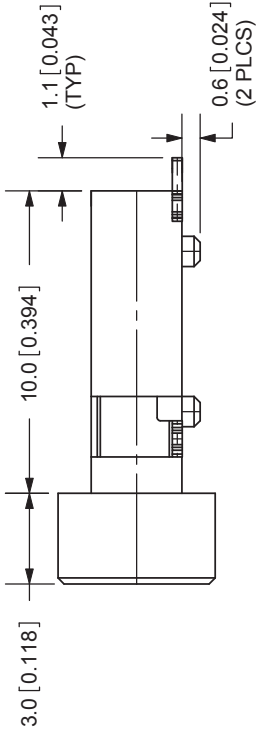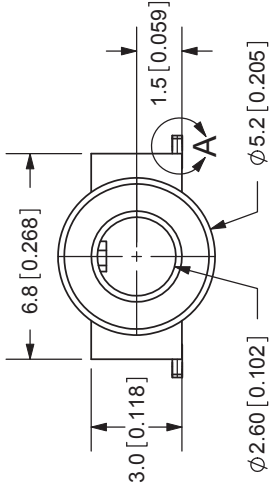


Note:
Add suf
tape & r

TOLERANCE:
X.X ±0.3mm
X.XX ±0.2mm


PCB LAYOUT
TOP VIEW

SPECIFICATIONS:
RATING: 16V DC @ 300mA
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES
OPERATING TEMP: -40 ~ +85C




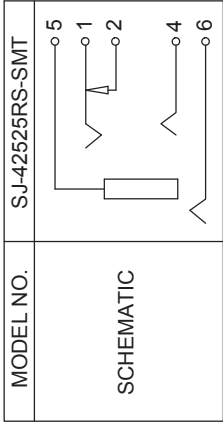


TERMINAL 1	MATERIAL	PLATING
TERMINAL 2	Titanium Copper	Silver
TERMINAL 4	Brass	Silver
TERMINAL 5	Titanium Copper	Silver
TERMINAL 6	Phosphor Bronze	Silver
HOUSING	Brass	Gold
	PBT	

REV.	DESCRIP
A	NEW DRAWING
B	updated PCB
C	housing material
D	added TR package



Coplanarity

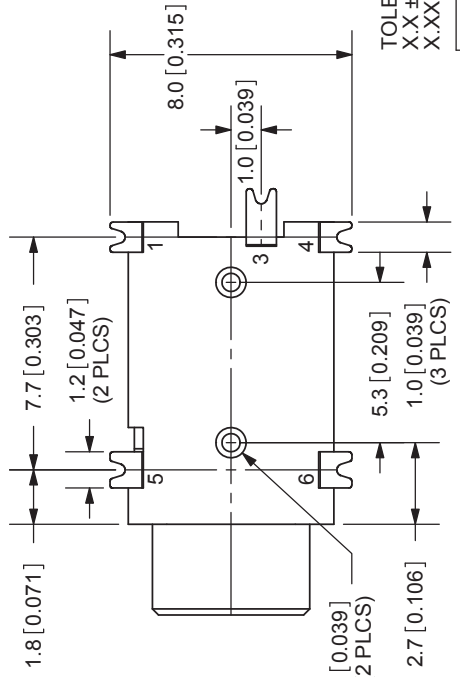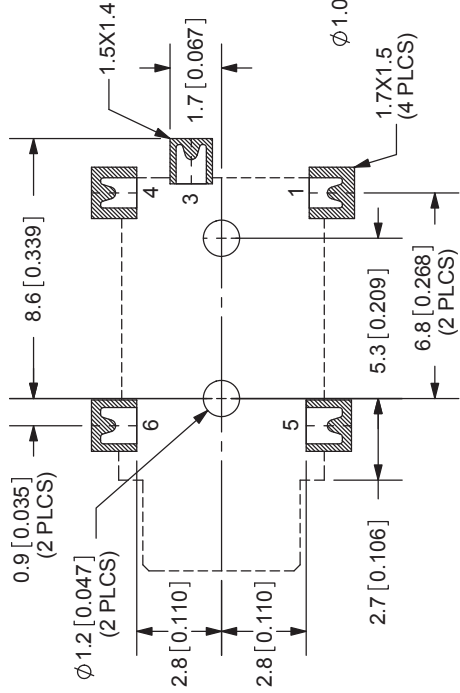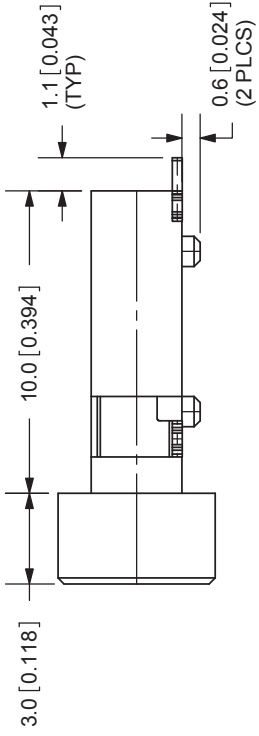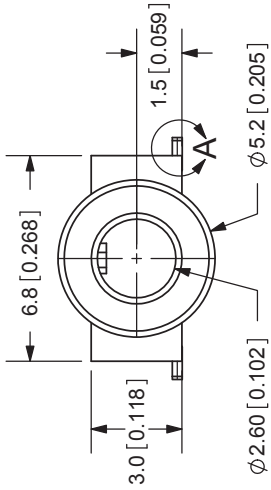


Note:
Add suffi
tape & re

TOLERANCE:
X.X ±0.3mm
X.XX ±0.2mm

PCB LAYOUT
TOP VIEW






SPECIFICATIONS:
RATING: 16V DC @ 300mA
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

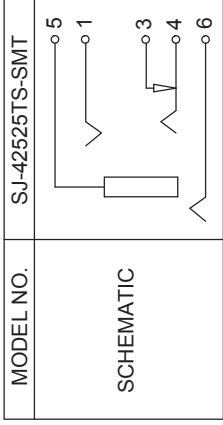

TERMINAL 1	MATERIAL	PLATING
TERMINAL 3	Titanium Copper	Silver
TERMINAL 4	Brass	Silver
TERMINAL 5	Titanium Copper	Silver
TERMINAL 6	Phosphor Bronze	Silver
HOUSING	Brass	Gold
	LCP	

TITLE	SMT AUDIO J
PART NO.	SJ-42525T
DRAWN BY:	ZRJ

REV.	DESCRIP
A	NEW DRAWING
B	updated PCB
C	housing material
D	added TR package

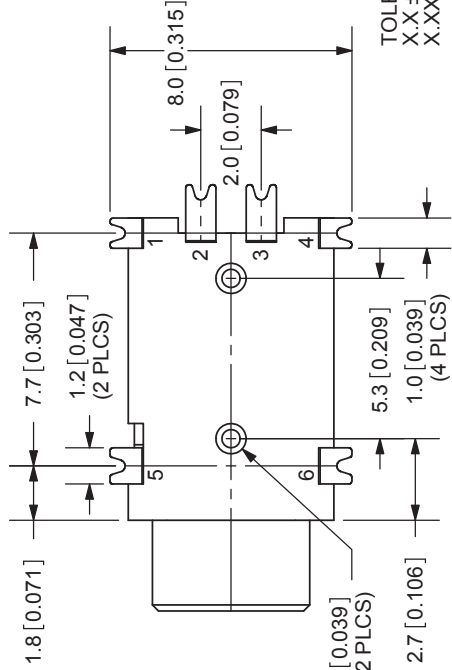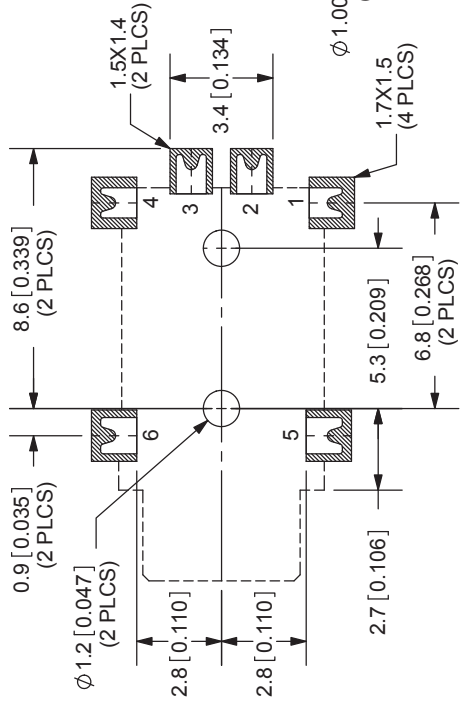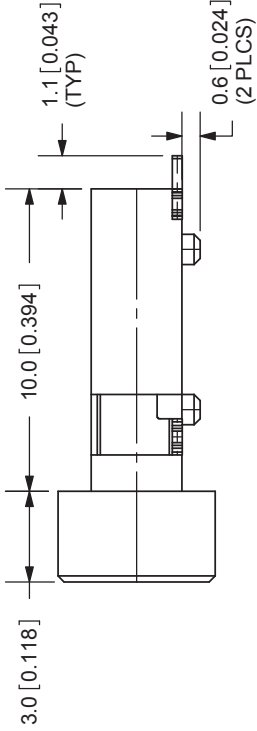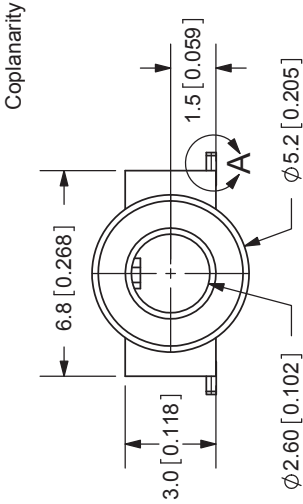


Note:
Add sufficient
tape & n

TOLERANCE:
X.X ±0.3mm
X.XX ±0.2mm

SPECIFICATIONS:
RATING: 16V DC @ 300mA
CONTACT RESISTANCE: 100m OHMS MAX
INSULATION RESISTANCE: 100M OHMS MIN: 500V DC
VOLTAGE WITHSTAND: 500V AC R.M.S. FOR 1 MINUTE
LIFE: 5,000 CYCLES

PCB LAYOUT
TOP VIEW

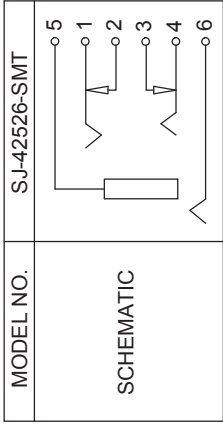

TERMINAL 1	MATERIAL	PLATING
TERMINAL 2	Titanium Copper	Silver
TERMINAL 3	Brass	Silver
TERMINAL 4	Brass	Silver
TERMINAL 5	Titanium Copper	Silver
TERMINAL 6	Phosphor Bronze	Silver
HOUSING	Brass	Gold
	LCP	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com