

PPS Film Capacitor

Type: **ECHS(Z)**

Non-inductive construction with PPS film designed for high heat resistance and high frequency applications




■ Features

- Wide operating temperature range –40 °C to +125 °C
- Excellent temperature coefficient –100 ppm/°C
- Excellent frequency characteristics
- RoHS directive compliant


■ Recommended Applications

- Automotive components
- Oscillation circuits

■ Explanation of Part Numbers

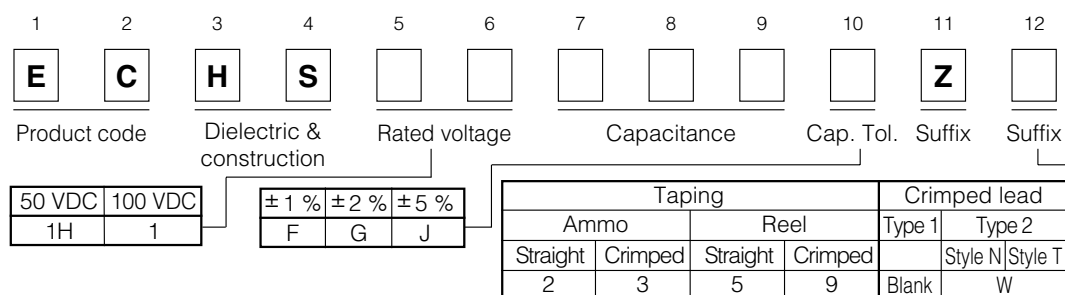

● Explanation of Part Number for Odd Size Taping

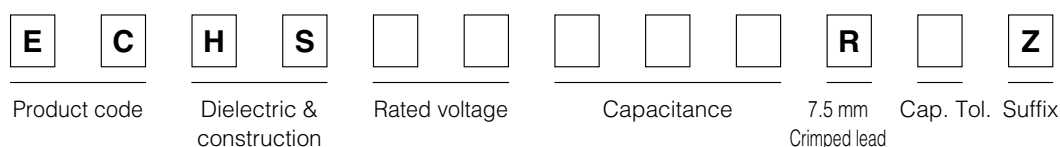


■ Specifications

Category temp. range (Including temperature-rise on unit surface)	-40 °C to +125 °C
Rated voltage	50 VDC, 100 VDC
Capacitance range	50 V : 0.0010 μF to 0.47 μF 100 V : 0.00010 μF to 0.47 μF
Capacitance tolerance	± 1 % (F), ± 2 % (G), ± 5 % (J)
Dissipation factor (tanδ)	tanδ ≤ 0.3 % (20 °C, 1 kHz)
Withstand voltage	Between terminals : Rated volt.(VDC) × 250 % 1 s to 5 s
Insulation resistance (IR)	C ≤ 0.33 μF : IR ≥ 45000 MΩ C > 0.33 μF : IR ≥ 15000 MΩ · μF (20 °C, 100 VDC, 60 s)

* In case of applying voltage in alternating current (50 Hz or 60 Hz sine wave) to a capacitor with DC rated voltage, please refer to the page of "Permissible voltage (R.M.S) in alternating current corresponding to DC rated voltage".

■ Dimensions in mm (not to scale)

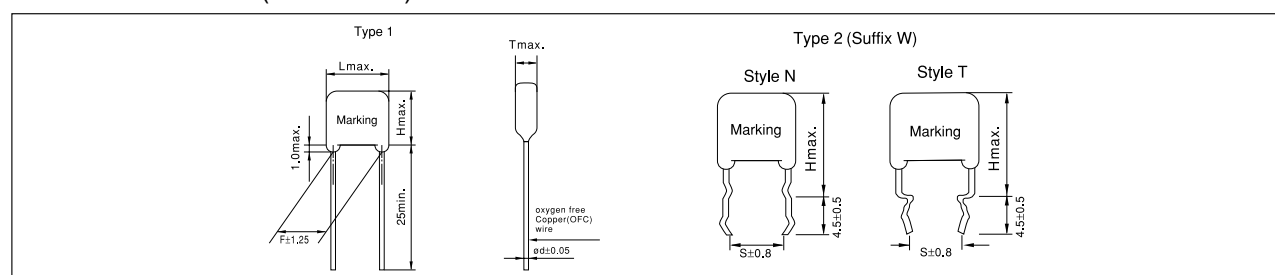


■ Packaging Specifications for Bulk Package

Packing quantity: 100 pcs./bag

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use.
Whenever a doubt about safety arises from this product, please inform us immediately for technical consultation without fail.

■Taping Specifications for Automatic Insertion

●Taping style

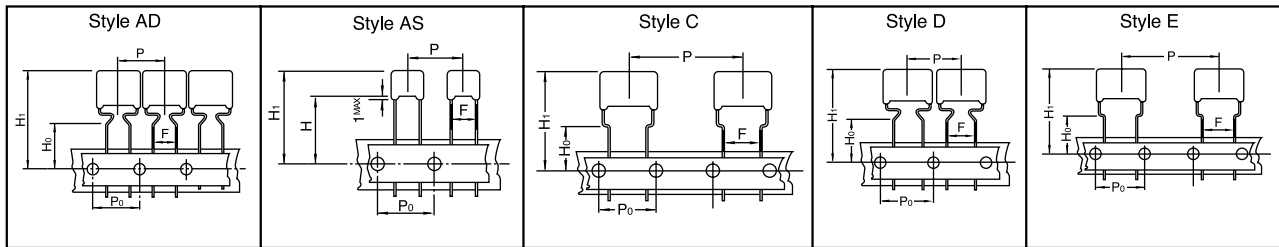

※Refer to the page of taping specifications.

●Packaging Specifications

Type	Rated volt.	Cap. range (μF)	Taping style						Packing
			AD	AS	B	C	D	E	
ECHS	50 VDC	0.0010 to 0.056	O						Ammo
		0.0010 to 0.056	O						Reel
		0.0010 to 0.012		O					Ammo
		0.0010 to 0.012		O					Reel
		0.068 to 0.47				O			Ammo
		0.15 to 0.47						O	Ammo
		0.068 to 0.12						O	Ammo
	100 VDC	0.00010 to 0.027	O						Ammo
		0.00010 to 0.027	O						Reel
		0.00010 to 0.0047		O					Ammo
		0.00010 to 0.0047		O					Reel
		0.033 to 0.12				O			Ammo
		0.033 to 0.056					O		Ammo
		0.068 to 0.47						O	Ammo

●Lead Spacing

Style	Lead Spacing
AD	5.0 mm
AS	5.0 mm
C	5.0 mm
D	7.5 mm
E	7.5 mm

※ See the column "Rating, Dimensions & Quantity Box" for packing quantity.

■Rating, Dimensions & Quantity/Ammo Box or Reel

●Rated voltage : 50 VDC, Capacitance tolerance : ±1 % (F), ±2 % (G), ±5 % (J)

Part No.	Cap. (μF)	Dimensions (mm)							Quantity	
		L _{max.}	T _{max.}	H _{max.}		F	S	ød	Ammo	Reel
				Type 1	Type 2					
ECHS1H102 □Z ()	0.0010	8.5	4.0	7.6	12.6	5.00	5.0	0.60	1000	—
ECHS1H122 □Z ()	0.0012	8.5	4.0	7.8	12.8	5.00	5.0	0.60		
ECHS1H152 □Z ()	0.0015	8.5	4.0	7.6	12.6	5.00	5.0	0.60		
ECHS1H182 □Z ()	0.0018	8.5	4.0	7.6	12.6	5.00	5.0	0.60		
ECHS1H222 □Z ()	0.0022	8.5	4.0	7.8	12.8	5.00	5.0	0.60		
ECHS1H272 □Z ()	0.0027	8.5	4.0	7.8	12.8	5.00	5.0	0.60		
ECHS1H332 □Z ()	0.0033	8.5	4.0	8.0	13.0	5.00	5.0	0.60		
ECHS1H392 □Z ()	0.0039	8.5	4.0	7.8	12.8	5.00	5.0	0.60		
ECHS1H472 □Z ()	0.0047	8.5	4.0	8.0	13.0	5.00	5.0	0.60		
ECHS1H562 □Z ()	0.0056	8.5	4.0	8.2	13.2	5.00	5.0	0.60		
ECHS1H682 □Z ()	0.0068	8.5	4.0	7.6	12.6	5.00	5.0	0.60		
ECHS1H822 □Z ()	0.0082	8.5	4.0	7.6	12.6	5.00	5.0	0.60		
ECHS1H103 □Z ()	0.010	8.5	4.0	7.8	12.8	5.00	5.0	0.60		
ECHS1H123 □Z ()	0.012	8.5	4.0	8.0	13.0	5.00	5.0	0.60		
ECHS1H153 □Z ()	0.015	12.0	4.5	7.8	12.8	7.50	5.0	0.60		
ECHS1H183 □Z ()	0.018	12.0	4.5	8.0	13.0	7.50	5.0	0.60		
ECHS1H223 □Z ()	0.022	12.0	4.5	8.2	13.2	7.50	5.0	0.60		
ECHS1H273 □Z ()	0.027	12.0	4.5	10.4	15.4	7.50	5.0	0.60	500	—
ECHS1H333 □Z ()	0.033	12.0	4.5	10.6	15.6	7.50	5.0	0.60		
ECHS1H393 □Z ()	0.039	12.0	5.0	10.4	15.4	7.50	5.0	0.60		
ECHS1H473 □Z ()	0.047	12.0	5.0	10.8	15.8	7.50	5.0	0.60		
ECHS1H563 □Z ()	0.056	12.0	5.5	11.0	16.0	7.50	5.0	0.60		
ECHS1H683 □Z ()	0.068	14.5	5.0	11.2	16.2	10.00	5.0	0.60		
ECHS1H823 □Z ()	0.082	14.5	5.5	11.6	16.6	10.00	5.0	0.60		
ECHS1H104 □Z ()	0.10	14.5	6.0	12.0	17.0	10.00	5.0	0.60		
ECHS1H124 □Z ()	0.12	14.5	6.5	12.4	18.4	10.00	5.0	0.60		
ECHS1H154 □Z ()	0.15	17.0	6.5	12.4	18.4	12.50	5.0	0.60		
ECHS1H184 □Z ()	0.18	17.0	6.5	14.0	19.0	12.50	5.0	0.60		
ECHS1H224 □Z ()	0.22	17.0	7.0	14.4	19.4	12.50	5.0	0.60		
ECHS1H274 □Z ()	0.27	17.0	7.5	15.2	20.2	12.50	5.0	0.80	400	—
ECHS1H334 □Z ()	0.33	17.0	8.5	15.8	20.8	12.50	5.0	0.80		
ECHS1H394 □Z ()	0.39	17.0	9.0	16.4	21.4	12.50	5.0	0.80		
ECHS1H474 □Z ()	0.47	17.0	10.0	17.2	22.2	12.50	5.0	0.80		

↑ Suffix for lead crimped or taped type
 ↑ Cap. tol. code

Style N: 0.0010 μF to 0.012 μF
 Style T: 0.015 μF to 0.47 μF

■ Rating, Dimensions & Quantity/Ammo Box or Reel

● Rated voltage: 100 VDC, Capacitance tolerance : $\pm 1\%$ (F), $\pm 2\%$ (G), $\pm 5\%$ (J)

Part No.	Cap. (μF)	Dimensions (mm)							Quantity	
		L _{max.}	T _{max.}	H _{max.}		F	S	ød	Ammo	Reel
				Type 1	Type 2	Type 1	Type 2			
ECHS1101□Z()	0.00010	8.5	4.0	6.5	11.5	5.00	5.0	0.60	1000	1000
ECHS1121□Z()	0.00012	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1151□Z()	0.00015	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1181□Z()	0.00018	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1221□Z()	0.00022	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1271□Z()	0.00027	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1331□Z()	0.00033	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1391□Z()	0.00039	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1471□Z()	0.00047	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1561□Z()	0.00056	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1681□Z()	0.00068	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1821□Z()	0.00082	8.5	4.0	6.5	11.5	5.00	5.0	0.60		
ECHS1102□Z()	0.0010	10.0	4.5	7.0	12.0	5.00	5.0	0.60		
ECHS1122□Z()	0.0012	10.0	4.5	7.0	12.0	5.00	5.0	0.60		
ECHS1152□Z()	0.0015	10.0	4.5	7.0	12.0	5.00	5.0	0.60		
ECHS1182□Z()	0.0018	10.0	4.5	7.0	12.0	5.00	5.0	0.60		
ECHS1222□Z()	0.0022	10.0	4.5	7.5	12.5	5.00	5.0	0.60		
ECHS1272□Z()	0.0027	10.0	4.5	7.0	12.0	5.00	5.0	0.60		
ECHS1332□Z()	0.0033	10.0	4.5	7.5	12.5	5.00	5.0	0.60		
ECHS1392□Z()	0.0039	10.0	4.5	7.0	12.0	5.00	5.0	0.60		
ECHS1472□Z()	0.0047	10.0	5.0	7.5	12.5	5.00	5.0	0.60		
ECHS1562□Z()	0.0056	12.0	4.5	8.0	13.0	7.50	5.0	0.60		
ECHS1682□Z()	0.0068	12.0	4.5	7.8	12.8	7.50	5.0	0.60		
ECHS1822□Z()	0.0082	12.0	4.5	8.0	13.0	7.50	5.0	0.60		
ECHS1103□Z()	0.010	12.0	4.5	8.0	13.0	7.50	5.0	0.60		
ECHS1123□Z()	0.012	12.0	5.0	8.2	13.2	7.50	5.0	0.60		
ECHS1153□Z()	0.015	12.0	5.0	8.4	13.4	7.50	5.0	0.60		
ECHS1183□Z()	0.018	12.0	5.5	8.8	13.8	7.50	5.0	0.60		
ECHS1223□Z()	0.022	12.0	5.0	10.8	15.8	7.50	5.0	0.60		
ECHS1273□Z()	0.027	12.0	5.5	11.2	16.2	7.50	5.0	0.60		
ECHS1333□Z()	0.033	14.5	5.5	11.2	16.2	10.00	5.0	0.60		
ECHS1393□Z()	0.039	14.5	6.0	11.6	16.6	10.00	5.0	0.60		
ECHS1473□Z()	0.047	14.5	6.0	11.8	16.8	10.00	5.0	0.60		
ECHS1563□Z()	0.056	14.5	6.5	12.2	17.2	10.00	5.0	0.60		
ECHS1683□Z()	0.068	17.0	6.5	12.2	17.2	12.50	5.0	0.60		
ECHS1823□Z()	0.082	17.0	6.5	13.8	18.8	12.50	5.0	0.60		
ECHS1104□Z()	0.10	17.0	7.0	14.2	19.2	12.50	5.0	0.60		
ECHS1124□Z()	0.12	17.0	7.5	14.8	19.8	12.50	5.0	0.60		
ECHS1154□Z()	0.15	20.5	7.5	15.0	20.0	15.00	5.0	0.80		
ECHS1184□Z()	0.18	20.5	7.5	15.6	20.6	15.00	5.0	0.80		
ECHS1224□Z()	0.22	20.5	8.5	16.2	21.2	15.00	5.0	0.80		
ECHS1274□Z()	0.27	20.5	9.0	17.6	22.6	15.00	5.0	0.80		
ECHS1334□Z()	0.33	20.5	10.0	18.4	23.4	15.00	5.0	0.80		
ECHS1394□Z()	0.39	20.5	10.5	19.2	24.2	15.00	5.0	0.80		
ECHS1474□Z()	0.47	20.5	11.5	20.2	25.2	15.00	5.0	0.80		

Suffix for lead crimped or taped type
 Cap. tol. code

Style N: 0.00010 μ F to 0.0047 μ F
 Style T: 0.0056 μ F to 0.47 μ F

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com