




**New
High Pass Filters**



Schematic

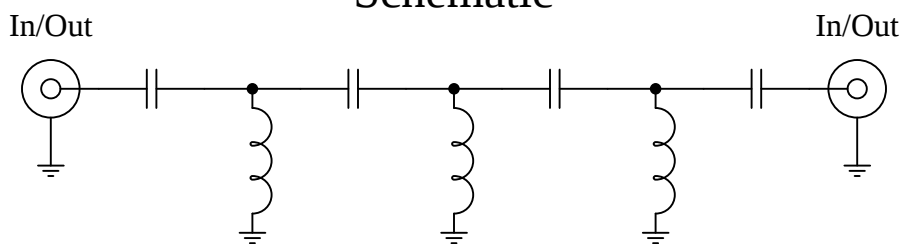

Features:


- 7th Order Butterworth Response
- 50Ω SMA Connectors

Applications:

- Test Equipment
- Lab Use




Maximum Ratings:

- +36dBm (4 Watts)
- Operating Temperature: -40°C to 85°C
- Storage Temperature: -55°C to 100°C

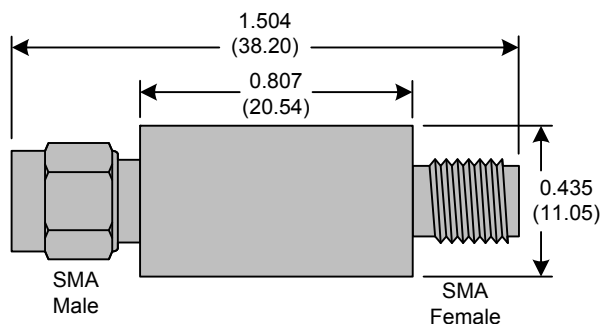

Crystek's new line of High Pass Filters are designed in a rugged SMA housing. This filter line has excellent out-of-band rejection. Designed for Test Equipment and General Lab Use.



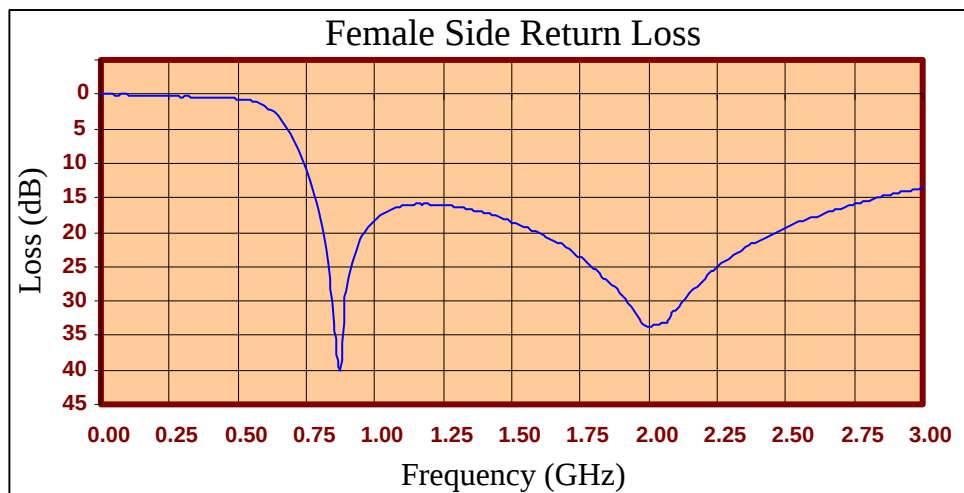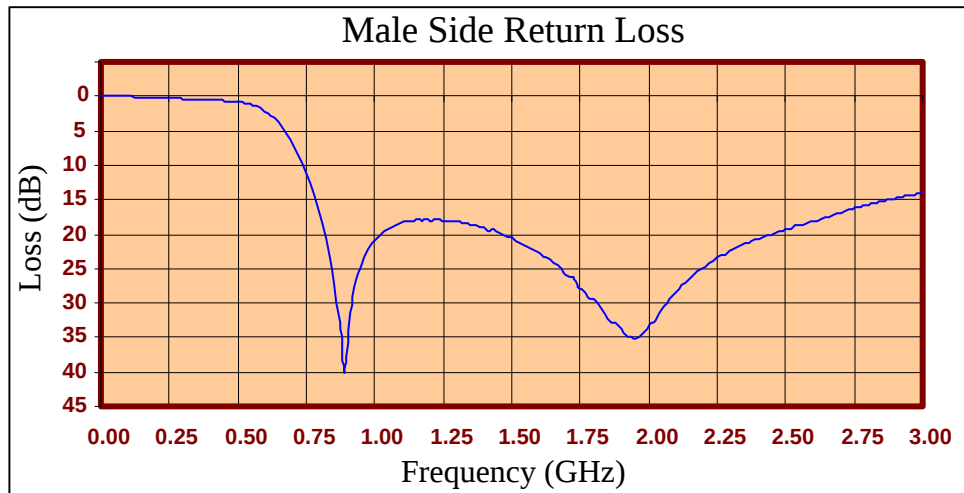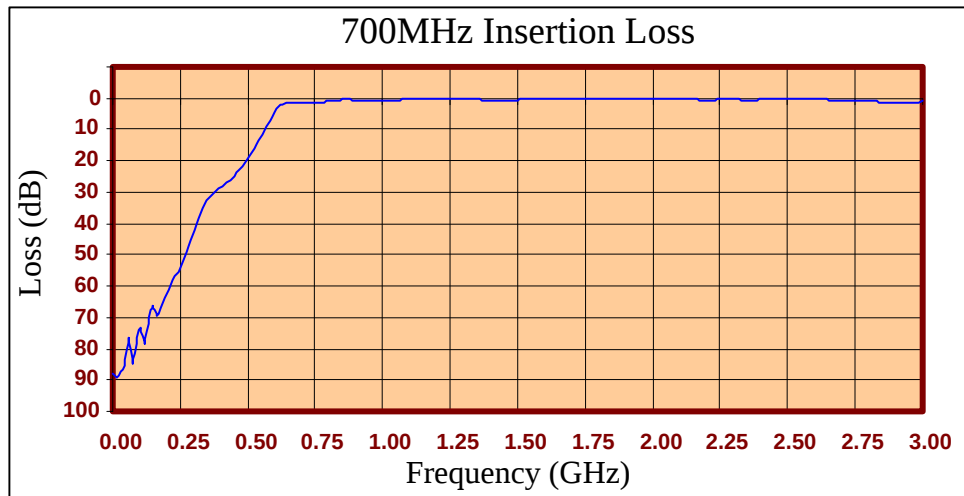



High Pass Filter CHPFL-0700

FREQ (MHz)	INSERTION LOSS (dB)	Male Return Loss (dB)	Female Return Loss (dB)
0.3	97.86	0.00	0.00
15.3	94.86	0.01	0.00
30.3	97.85	0.02	0.01
45.3	98.42	0.01	0.01
60.3	109.08	0.04	0.06
75.3	90.12	0.04	0.05
90.3	82.42	0.02	0.05
105	76.80	0.04	0.07
120	71.84	0.08	0.11
135	70.98	0.10	0.13
150	70.14	0.13	0.18
165	69.15	0.17	0.21
180	66.11	0.18	0.25
195	62.28	0.19	0.23
210	58.25	0.18	0.22
225	53.89	0.18	0.23
240	51.56	0.22	0.29
255	51.29	0.24	0.28
270	50.57	0.24	0.33
285	48.70	0.29	0.33
300	45.78	0.36	0.35
330	37.26	0.40	0.39
405	29.33	0.56	0.48
450	18.94	0.70	0.53
510	16.53	0.92	0.71
585	7.57	1.71	1.30
705	2.42	7.31	6.88
810	0.74	18.28	19.36
900	0.59	33.99	26.91
1005	0.63	20.65	18.06
1245	0.57	18.02	16.09
1500	0.46	20.53	18.56
1755	0.21	27.83	23.73
1995	0.27	33.87	33.63
2250	0.69	23.40	24.99
2505	0.50	19.31	19.25
2745	0.62	16.38	16.00
3000	0.80	14.07	13.53

Product Control:

Crystek Part Number:	CHPFL-0700	Release Date:	29-May-2015
Revision Level:	C	Responsible:	K. Piotrowicz

Rev C

Page 3 of 3



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com