

# HiPerFAST™ IGBT

## B2-Class High Speed


### IGBT in ISOPLUS220™ Case

#### Electrically Isolated Back Surface

IXGC 16N60B2  
IXGC 16N60B2D1


$$\begin{aligned} V_{CES} &= 600 \text{ V} \\ I_{C25} &= 28 \text{ A} \\ V_{CE(sat)} &= 2.3 \text{ V} \\ t_{fi(typ)} &= 80 \text{ ns} \end{aligned}$$

Preliminary Data Sheet



| Symbol              | Test Conditions                                                                                   | Maximum Ratings                  |                  |
|---------------------|---------------------------------------------------------------------------------------------------|----------------------------------|------------------|
| $V_{CES}$           | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$                                                   | 600                              | V                |
| $V_{CGR}$           | $T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ ; $R_{GE} = 1 \text{ M}\Omega$                    | 600                              | V                |
| $V_{GES}$           | Continuous                                                                                        | $\pm 20$                         | V                |
| $V_{GEM}$           | Transient                                                                                         | $\pm 30$                         | V                |
| $I_{C25}$           | $T_C = 25^\circ\text{C}$                                                                          | 28                               | A                |
| $I_{C110}$          | $T_C = 110^\circ\text{C}$                                                                         | 13                               | A                |
| $I_{D110}$          | $T_C = 110^\circ\text{C}$ (IXGC16N60B2D1 diode)                                                   | 10                               | A                |
| $I_{CM}$            | $T_C = 25^\circ\text{C}$ , 1 ms                                                                   | 100                              | A                |
| <b>SSOA (RBSOA)</b> | $V_{GE} = 15 \text{ V}$ , $T_J = 125^\circ\text{C}$ , $R_G = 22 \Omega$<br>Clamped inductive load | $I_{CM} = 32$<br>@ $0.8 V_{CES}$ | A                |
| $P_C$               | $T_C = 25^\circ\text{C}$                                                                          | 63                               | W                |
| $T_J$               |                                                                                                   | -55 ... +150                     | $^\circ\text{C}$ |
| $T_{JM}$            |                                                                                                   | 150                              | $^\circ\text{C}$ |
| $T_{stg}$           |                                                                                                   | -55 ... +150                     | $^\circ\text{C}$ |
| $F_C$               | Mounting Force                                                                                    | 11..65/2.5..15                   | N/lb.            |
| $V_{ISOL}$          | Isolation Voltage; 50/60Hz; t = 1minute; RMS                                                      | 2500                             | V                |
|                     | Maximum lead temperature for soldering<br>1.6 mm (0.062 in.) from case for 10 s                   | 300                              | $^\circ\text{C}$ |
| <b>Weight</b>       |                                                                                                   | 2                                | g                |

ISOPLUS 220™ (IXGC)  
E153432

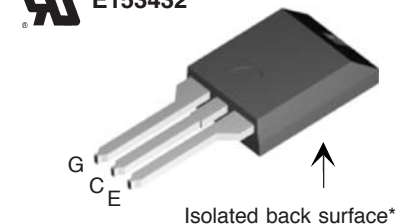

G = Gate      C = Collector  
E = Emitter

#### Features

- DCB Isolated mounting tab
- UL recognized (E153432)
- Meets TO-273 package Outline
- High current handling capability
- MOS Gate turn-on  
- drive simplicity
- Epoxy meets UL94V-0 flammability classification

#### Applications

- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies
- AC motor speed control
- DC servo and robot drives
- DC choppers


#### Advantages

- Easy assembly
- High power density
- Very fast switching speeds for high frequency applications

| Symbol        | Test Conditions                                          | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                                      |
|---------------|----------------------------------------------------------|-----------------------------------------------------------------------------------|------|--------------------------------------|
|               |                                                          | min.                                                                              | typ. | max.                                 |
| $V_{GE(th)}$  | $I_C = 250 \mu\text{A}$ , $V_{CE} = V_{GE}$              | 2.5                                                                               |      | 5.0 V                                |
| $I_{CES}$     | $V_{CE} = V_{CES}$<br>$V_{GE} = 0 \text{ V}$             |                                                                                   |      | 25 $\mu\text{A}$<br>50 $\mu\text{A}$ |
| $I_{GES}$     | $V_{CE} = 0 \text{ V}$ , $V_{GE} = \pm 20 \text{ V}$     |                                                                                   |      | $\pm 100 \text{ nA}$                 |
| $V_{CE(sat)}$ | $I_C = 12 \text{ A}$ , $V_{GE} = 15 \text{ V}$<br>Note 2 |                                                                                   | 1.8  | 2.3 V<br>V                           |

| Symbol       | Test Conditions                                                     | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |         |
|--------------|---------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|---------|
|              |                                                                     | min.                                                                              | typ. | max.    |
| $g_{fs}$     | $I_C = 12\text{A}$ ; $V_{CE} = 10\text{V}$ ,<br>Note 2.             | 8                                                                                 | 12   | S       |
| $C_{ies}$    | $V_{CE} = 25\text{V}$ , $V_{GE} = 0\text{V}$ , $f = 1\text{MHz}$    |                                                                                   | 780  | pF      |
| $C_{oes}$    | 16N60B2                                                             |                                                                                   | 55   | pF      |
|              | 16N60B2D1                                                           |                                                                                   | 65   | pF      |
| $C_{res}$    |                                                                     |                                                                                   | 19   | pF      |
| $Q_g$        | $I_C = 20\text{A}$ , $V_{GE} = 15\text{V}$ , $V_{CE} = 0.5 V_{CES}$ |                                                                                   | 32   | nC      |
| $Q_{ge}$     |                                                                     |                                                                                   | 6    | nC      |
| $Q_{gc}$     |                                                                     |                                                                                   | 10   | nC      |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b>         |                                                                                   | 25   | ns      |
| $t_{ri}$     | $I_C = 12\text{A}$ ; $V_{GE} = 15\text{V}$                          |                                                                                   | 15   | ns      |
| $t_{d(off)}$ | $V_{CE} = 400\text{V}$ ; $R_G = R_{off} = 22\ \Omega$               |                                                                                   | 70   | 150 ns  |
| $t_{fi}$     | Note 1                                                              |                                                                                   | 80   | 150 ns  |
| $E_{off}$    |                                                                     |                                                                                   | 150  | 260 mJ  |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 125^\circ\text{C}</math></b>         |                                                                                   | 25   | ns      |
| $t_{ri}$     | $I_C = 12\text{A}$ ; $V_{GE} = 15\text{V}$                          |                                                                                   | 18   | ns      |
| $E_{on}$     | $I_C = 12\text{A}$ ; $V_{GE} = 15\text{V}$                          | 16N60B2                                                                           | 0.38 | mJ      |
|              | $V_{CE} = 400\text{V}$ ; $R_G = R_{off} = 22\ \Omega$               | 16N60B2D 1                                                                        | 0.8  | mJ      |
| $t_{d(off)}$ | Note 1                                                              |                                                                                   | 110  | ns      |
| $t_{fi}$     |                                                                     |                                                                                   | 170  | ns      |
| $E_{off}$    |                                                                     |                                                                                   | 350  | mJ      |
| $R_{thJC}$   |                                                                     |                                                                                   |      | 2.0 K/W |
| $R_{thCK}$   |                                                                     |                                                                                   | 0.25 | K/W     |

#### ISOPLUS220 Outline

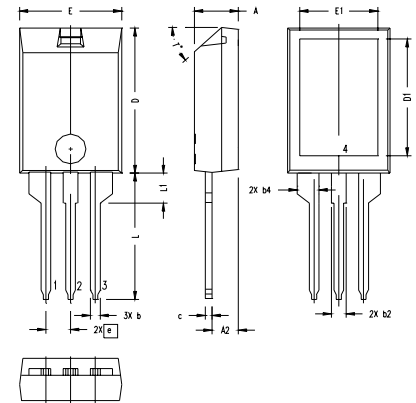

| SYM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | .157   | .197  | 4.00        | 5.00  |
| A2  | .098   | .118  | 2.50        | 3.00  |
| b   | .035   | .051  | 0.90        | 1.30  |
| b2  | .049   | .065  | 1.25        | 1.65  |
| b4  | .093   | .100  | 2.35        | 2.55  |
| c   | .028   | .039  | 0.70        | 1.00  |
| D   | .591   | .630  | 15.00       | 16.00 |
| D1  | .472   | .512  | 12.00       | 13.00 |
| E   | .394   | .433  | 10.00       | 11.00 |
| E1  | .295   | .335  | 7.50        | 8.50  |
| e   | .100   | BASIC | 2.55        | BASIC |
| L   | .512   | .571  | 13.00       | 14.50 |
| L1  | .118   | .138  | 3.00        | 3.50  |
| T*  |        |       | 42.5*       | 47.5* |

NOTE:  
1. Bottom heatsink (Pin 4) is electrically isolated from Pin 1, 2, or 3.  
2. This drawing will meet dimensional requirement of JEDEC SS Product Outline 10-273 except D and D1 dimension.

#### Reverse Diode (FRED)

| Symbol     | Test Conditions                                                                                      | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ , unless otherwise specified) |      |                  |
|------------|------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------|------------------|
|            |                                                                                                      | min.                                                                              | typ. | max.             |
| $V_F$      | $I_F = 10\text{A}$ , $V_{GE} = 0\text{V}$<br>$T_J = 125^\circ\text{C}$                               |                                                                                   |      | 2.66 V<br>1.66 V |
| $I_{RM}$   | $I_F = 12\text{A}$ ; $-di_F/dt = 100\text{A}/\mu\text{s}$ , $V_R = 100\text{V}$                      |                                                                                   | 2.5  | A                |
| $t_{rr}$   | $V_{GE} = 0\text{V}$ ; $T_J = 125^\circ\text{C}$                                                     |                                                                                   | 110  | ns               |
| $t_{rr}$   | $I_F = 1\text{A}$ ; $-di_F/dt = 100\text{A}/\mu\text{s}$ ; $V_R = 30\text{V}$ , $V_{GE} = 0\text{V}$ |                                                                                   | 30   | ns               |
| $R_{thJC}$ |                                                                                                      |                                                                                   |      | 2.5 K/W          |

Notes: 1. Switching times may increase for  $V_{CE}(\text{Clamp}) > 0.8 \cdot V_{CES}$ , higher  $T_J$ , or increased  $R_G$ .  
2. Pulse test,  $t < 300\text{ms}$ , duty cycle  $d < 2\%$

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585  
one or more of the following U.S. patents: 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2  
4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)