

Alden Connector Configurator

Pulse-Lok® Configuration Options


Series	PL-700SM-N Plastic Shell
Housing Material	Plastic
Housing Style	Receptacle, Front Panel-Mount
Circuit Count	4
Contact Size	2-16, 2-22
Contact Type	Machined, Gold Plated
Contact Plating	Gold
Contact Termination	crimp/solder
Mating Key	1
Max Wire Gauge	2-16, 2-22
Max Cable Dia.	NA
Housing Color	gray
Coupling Ring Color	NA
Adapter Color	NA

You Selected Part #:

300156

Specifications

Environmentally Sealed	Yes
Housing Size	0.710"
Housing Style	Plastic
Latch Mechanism	Pulse-Lok
Operating Current	13.0-3.0
Operating Voltage	300 V RMS
RF Immunity	No

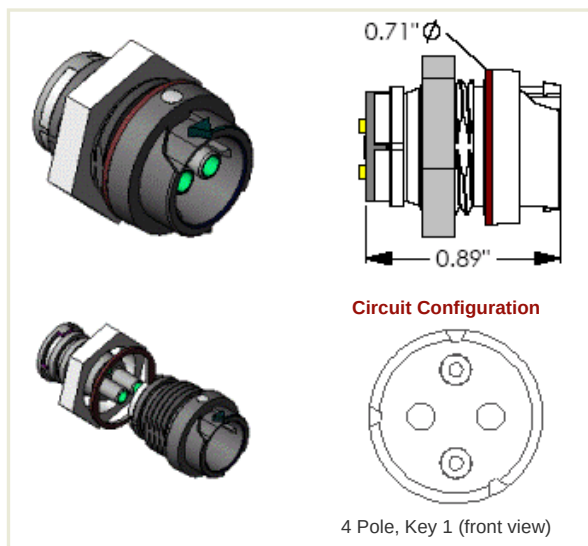

Configure a Mating Connector

Contact Termination	crimp/solder
Contact Type	Machined, Gold Plated
Coupling Ring Color	gray
Housing Color	gray
Housing Style	Plug, In-line
Max Cable Dia.	0.300
Mating Connector:	300034



Component List

Item	Part #	Description	Quantity
1	102388	Receptacle Housing	1
2	103917	Receptacle Core Insulator	1
3	101674	Socket Contact- Size 16	2
4	101675	Socket Contact- Size 22	2
5	103032	Receptacle Core Seal	1
6	102253	Panel Gasket	1
7	102985	Panel Nut	1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com