

**ebm-papst St. Georgen GmbH & Co. KG**

Hermann-Papst-Straße 1

74673 St. Georgen

Phone: +49 7724 81-0

Fax: +49 7724 81-1309

www.ebmpapst.com

info2@de.ebmpapst.com

**Nominal data**


| Type                     | 4212 NGML            |      |
|--------------------------|----------------------|------|
| Nominal voltage          | [VDC]                | 12   |
| Speed                    | [min <sup>-1</sup> ] | 2150 |
| Power input              | [W]                  | 2.3  |
| Min. ambient temperature | [°C]                 | -20  |
| Max. ambient temperature | [°C]                 | 70   |
| Air flow                 | [m <sup>3</sup> /h]  | 127  |
| Sound power level        | [B]                  | 4.8  |
| Sound pressure level     | [dB(A)]              | 35   |

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit  
Subject to alterations


## Technical features

|                                     |                                                                                                            |
|-------------------------------------|------------------------------------------------------------------------------------------------------------|
| Dimensions                          | 119 x 119 x 38 mm                                                                                          |
| General description                 | DC fan with electronically commutated external rotor motor. Commutation electronics completely integrated. |
| Connection line                     | 2 single strands AWG 22, TR 64                                                                             |
| Locked-rotor protection             | Blocking and overload protection                                                                           |
| Direction of protection             | Left, looking at rotor                                                                                     |
| Direction of air flow               | Air exhaust over bars                                                                                      |
| Bearing                             | Sintec sleeve bearing system                                                                               |
| Lifetime L10 at 40 °C               | 70000 h                                                                                                    |
| Lifetime L10 at maximum temperature | 35000 h                                                                                                    |
| Mass                                | 0.230 kg                                                                                                   |
| Material of impeller                | Fiberglass-reinforced PA plastic                                                                           |
| Motor protection                    | Reverse-polarity protected. The fan runs only if the polarity is correct.                                  |
| Approval                            | VDE, CSA, UL, CE                                                                                           |

## Product drawing

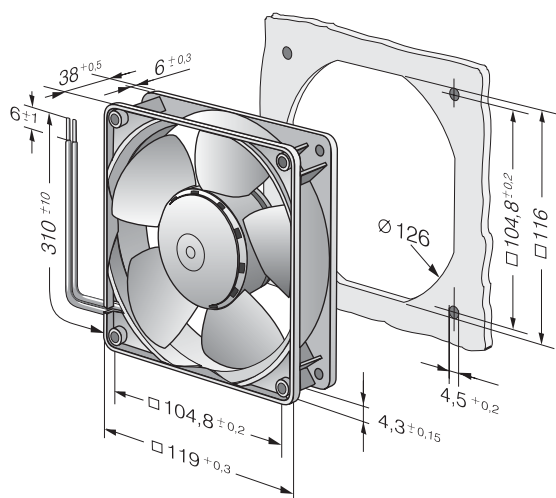

## Charts: Air flow

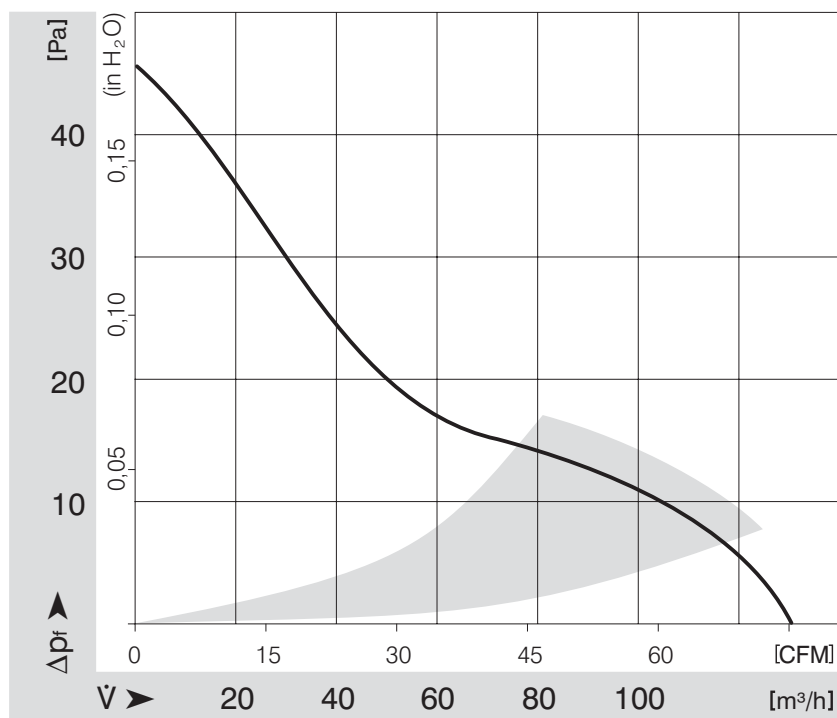

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)