



NEXT GENERATION
SERIAL SERVERS



CONNECTPORT® LTS 8/16/32

Next generation serial servers support GB Ethernet and IPv6 networks. Optional ZigBee and USB bring wireless capabilities into multi-port serial server environments.

ConnectPort LTS serial servers deliver secure, reliable, flexible and cost-effective RS-232/422/485 serial-to-Ethernet connectivity. Target serial-to-IP applications include data center console port management, security, property management, point-of-sale, data acquisition, industrial automation, power utilities, logistics and others.

ConnectPort LTS is an intelligent device that handles wireline and wireless connections simultaneously. Features include Dual GB Ethernet for extreme reliability, an SD memory slot for data storage, and a large LCD screen for easy configuration, monitoring and diagnostics. The ConnectPort LTS W model

provides USB 2.0 ports for expandability, internal secure modem, and an XBee® interface for ZigBee communication.

Highly advanced software features include an IPv4/IPv6 dual stack, user port sharing for socket connections, port logging, SSHv2 and SSL. Python support and a Software Development Kit (SDK) make this versatile Linux-based appliance a good platform for programming.

BENEFITS

- Dual GB Ethernet ports for routing
- Software selectable RS-232/422/485 (MEI models only) for industrial applications
- LCD display for status monitoring, diagnostics and configuration
- SD memory slot for data storage, supporting SD and HCSD
- W models offer USB2.0 ports for expandability, internal modem and XBee socket for ZigBee communications
- Dual power option on 16-port MEI model

RELATED PRODUCTS



PortServer®
TS



ConnectPort®
TS 8/16



ConnectPort®
TS 4x4




Digi
Passport®



Cables and
Accessories

APPLICATION EXAMPLE

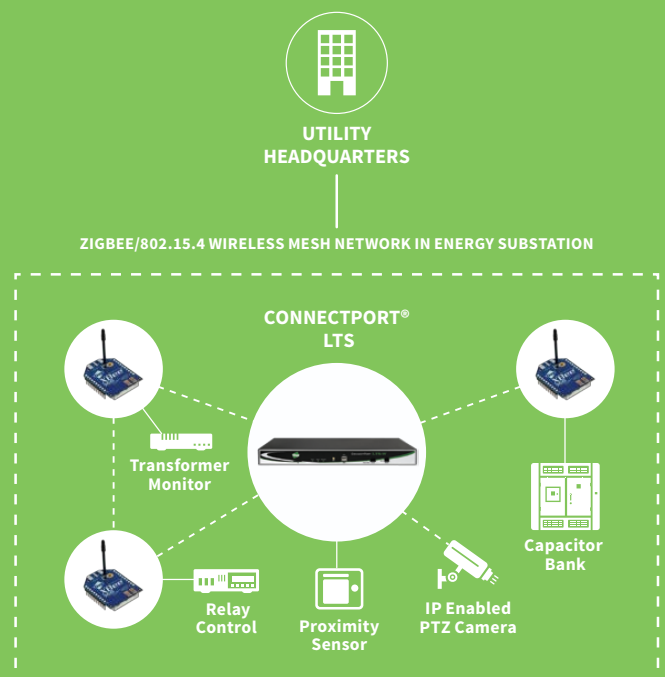

SPECIFICATIONS		ConnectPort® LTS 8/8W ConnectPort® LTS 16/16W		ConnectPort® LTS 32/32W
FEATURES				
PROCESSOR	Freescale MPC8314, 400 MHz			
THROUGHPUT	Up to 230 Kbps			
MEMORY	128 MB SDRAM / 34 MB Flash	256 MB SDRAM / 34 MB Flash		256 MB SDRAM / 34 MB Flash
MANAGEMENT	HTTP/HTTPS, CLI or telnet, SNMP read and write			
OPERATING SYSTEMS	AIX, HP-UX, Solaris, Linux®, Windows® 2000, Windows® XP, Windows® 7, Windows® 8, Windows® 8.1, Windows® 10, Windows Server® 2003, Windows Server® 2008, Windows Server® 2012. Note: TCP/UDP socket services are operating system independent.			
SOFTWARE	RealPort®, Python, Port sharing (sockets only, not for RealPort), Port logging (online and offline), Line printer Daemon			
PROTOCOLS	TCP/UDP, DHCP, telnet, Reverse telnet/SSHv2/SSL, IPv4/IPv6			
SECURITY	Encrypted RealPort, SSHv2, TLS/SSL			
LEDS	Serial ports: Tx/Rx per port; Ethernet: Link/Activity, Power, Ready, Diagnostic; Optional modem: DTR/DCD			
DIMENSIONS (LENGTH X WIDTH X HEIGHT)	189 mm x 271 mm x 44 mm (7.4 in x 10.7 in x 1.7 in)	222 mm x 443 mm x 44.5 mm (8.7 in x 17.4 in x 1.8 in)		222 mm x 443 mm x 44.5 mm (8.7 in x 17.4 in x 1.8 in)
WEIGHT	1550 g (3.4 lb)	2600 g (5.7 lb), 2690 g (5.9 lb) dual power model		2600 g (5.7 lb), 2690 g (5.9 lb) dual power model
INTERFACES				
SERIAL PORTS	8 RS-232 or RS-232/422/485 software-selectable (MEI models)	16 RS-232 or RS-232/422/485 software-selectable (MEI models)		32 RS-232 or RS-232/422/485 software-selectable (MEI models)
SERIAL CONNECTOR	Digi 10-pin			
ETHERNET PHYSICAL LAYER	Dual 10/100/1000 Mbps auto sensing; Full of half duplex			
USB PORTS	2 USB 2.0 connectors; 500 mA max each port (W models only)			
CONSOLE PORTS	10-pin RJ-45 serial port for configuration			
RPSMA CONNECTOR	1 for ZigBee wireless (W models only)			
RJ-11 CONNECTOR	1 for internal modem (W models only)			
POWER REQUIREMENTS				
POWER INPUT	9-30 VDC	100-240 VAC, 50-60 Hz, 0.8A		100-240 VAC, 50-60 Hz, 0.8A
POWER SUPPLY	2A@12 VDC	N/A		N/A
POWER CONSUMPTION	18W max	30W max		30W max
ENVIRONMENTAL				
OPERATING TEMPERATURE	0° C to +55° C (32° F to +130° F)			
STORAGE TEMPERATURE	-20° C to +66° C (-4° F to +151° F)			
RELATIVE HUMIDITY	5%-95% (non-condensing)			
SERIAL PORT PROTECTION (ESD)	±15 kV			
ETHERNET ISOLATION	1500 VAC (rms)			
REGULATORY APPROVALS				
SAFETY	UL 60950-1, EN 60950-1			
EMISSIONS/IMMUNITY	FCC Part 15, Subpart B, Class A, EN 55022 Class A, EN 55024			

PART NUMBERS	DESCRIPTION
770002411	ConnectPort LTS 32
70002412	ConnectPort LTS 32 (International)
70002413	ConnectPort LTS 32 MEI
70002414	ConnectPort LTS 32 MEI (International)
70002415	ConnectPort LTS 32 W
70002416	ConnectPort LTS 32 W (International)
70002417	ConnectPort LTS 32 MEI W
70002418	ConnectPort LTS 32 MEI W (International)
70001634	ConnectPort LTS 16 MEI 2AC
70002403	ConnectPort LTS 16
70002404	ConnectPort LTS 16 (International)
70002405	ConnectPort LTS 16 MEI
70002406	ConnectPort LTS 16 MEI (International)
70002407	ConnectPort LTS 16 W
70002408	ConnectPort LTS 16 W (International)
70002409	ConnectPort LTS 16 MEI W
70002410	ConnectPort LTS 16 MEI W (International)
70001609	ConnectPort LTS 8
70001610	ConnectPort LTS 8 (International)
70001611	ConnectPort LTS 8 MEI
70001612	ConnectPort LTS 8 MEI (International)
70001613	ConnectPort LTS 8 W
70001614	ConnectPort LTS 8 W (International)
70001615	ConnectPort LTS 8 MEI W
70001616	ConnectPort LTS 8 MEI W (International)

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2015 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001591
B1/815

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com