

Omnidirectional Back Electret Condenser Microphone Cartridge

WM-64C / WM-64K


- Small and thin type omnidirectional microphone
- Solder type for leadwires
- Back electret type designed for high resistance to vibrations
- 33pF or 10pF capacitor contained for RF noise reduction
- WM-64C(33pF), WM-64K(10pF)

■ Appearance




■ Dimensional Drawing


Unit : mm

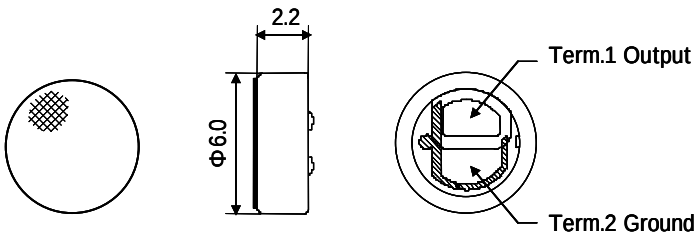

■ Schematic Diagram

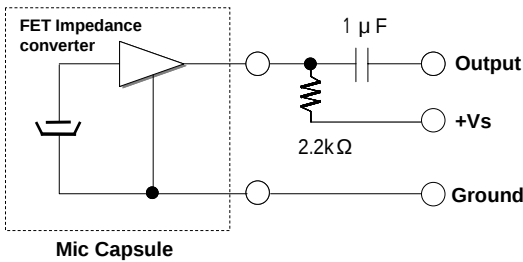

■ Typical Frequency Response Curve

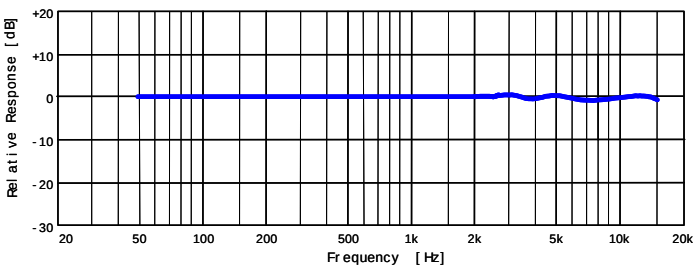

■ Sensitivity

(0dB=1V/Pa, 1kHz)

Sensitivity

-45+ / -4dB
-44+ / -3dB

Model No.

(33pF)	(10pF)
WM-64C	WM-64K
WM-64CT	WM-64KT

Vs=2.0V
RL=2.2kΩ

Specifications

Dimensions	6 x 2.2 mm
Impedance	Less than 2.2kΩ
Frequency	Omnidirectional
Max operation voltage	20-16,000Hz
Standard operation voltage	10V
Current consumption	2V
Sensitivity reduction	Max 0.5mA
S/N ratio	Within -3dB at 1.5V
	More than 58dB

Specifications are subject to change without notice.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com