## Model 10261-3



## **Hybrid Couplers**

3 dB, 90°

#### **Applications**

- Microstrip Circuits
- Power Amps
- Divider/Combiners
- Switch Networks
- **Balanced Detectors**
- Antenna Feeds



#### **Features**


- Welded Tab Mount
- 2-Way Power Split
- Reliable Performance
- Handles 600 Watts

Electrical Specifications			
Frequency MHz	Isolation dB Min/Typ	Insert. Loss dB Max	VSWR Max : 1
62.5 - 125	20/27	0.35	1.20/1.10
Amp. Bal. dB Max	Phase Bal.  Degrees Max	Power Ave. CW Watts	
±0.50	±2.0	600	

Notes: Electrical specifications apply only with properly designed test fixtures. Testing is done at ambient temperature only. Sample testing is performed to MIL-STD-105, Level 2, AQL 1.0. Test includes coupling, amplitude balance, insertion loss and isolation. If your application requires additional testing, consult Anaren Power rating applies when solder tab/coupler interface has been conformally coated. Impedance: 50 ohms. Meets MIL-E-5400 Class 3 requirements. Additional screening available for military and space applications.

Electrical and Mechanical Specifications subject to change without notice.

#### **Outline Drawing**

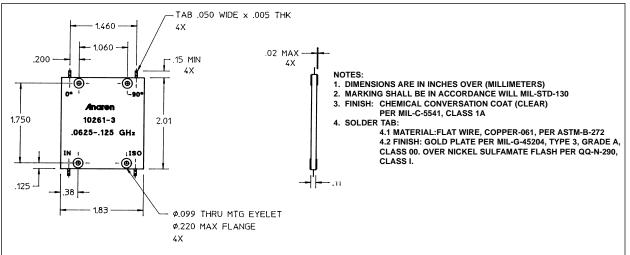



Sales Desk USA: Voice: (800) 544-2414 Fax: (315) 432-9121 Sales Desk Europe: Voice: (+44) 23 92 232392 Fax: (+44) 23 92 251369

# AMEYA360 Components Supply Platform

#### **Authorized Distribution Brand:**

























#### Website:

Welcome to visit www.ameya360.com

#### Contact Us:

#### > Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

#### > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

#### Customer Service :

Email service@ameya360.com

### Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com