

# Radar Pulsed Power Transistor 30W, 3.1-3.4 GHz, 1µs Pulse, 10% Duty

# M/A-COM Products Released, 10 Jul 07


### **Features**

- NPN silicon microwave power transistors
- Common base configuration
- Broadband Class C operation
- High efficiency inter-digitized geometry
- Diffused emitter ballasting resistors
- Gold metallization system
- Internal input and output impedance matching
- Hermetic metal/ceramic package
- RoHS compliant

## Absolute Maximum Ratings at 25°C

Parameter	Symbol	Rating	Units
Collector-Emitter Voltage	V <sub>CES</sub>	65	V
Emitter-Base Voltage	$V_{EBO}$	3.0	V
Collector Current (Peak)	Ic	3.6	Α
Power Dissipation @ +25°C	P <sub>TOT</sub>	350	W
Storage Temperature	$T_{STG}$	-65 to +200	°C
Junction Temperature	$T_J$	200	°C

## **Outline Drawing**



## Electrical Specifications: T<sub>C</sub> = 25 ± 5°C (Room Ambient)

Parameter	Test Conditions	Frequency	Symbol	Min	Max	Units
Collector-Emitter Breakdown Voltage	I <sub>C</sub> = 10mA		BV <sub>CES</sub>	65	-	V
Collector-Emitter Leakage Current	V <sub>CE</sub> = 40V		I <sub>CES</sub>	-	1.5	mA
Thermal Resistance	Vcc = 36V, Pout = 30W	F = 3.1, 3.25, 3.4 GHz	R <sub>TH(JC)</sub>	-	0.5	°C/W
Input Power	Vcc = 36V, Pout = 30W	F = 3.1, 3.25, 3.4 GHz	P <sub>IN</sub>	-	5.33	W
Power Gain	Vcc = 36V, Pout = 30W	F = 3.1, 3.25, 3.4 GHz	G <sub>P</sub>	7.5	-	dB
Collector Efficiency	Vcc = 36V, Pout = 30W	F = 3.1, 3.25, 3.4 GHz	ης	35	-	%
Input Return Loss	Vcc = 36V, Pout = 30W	F = 3.1, 3.25, 3.4 GHz	RL	-	-6	dB
Load Mismatch Tolerance	Vcc = 36V, Pout = 30W	F = 3.25 GHz	VSWR-T	-	2:1	-

Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298 Visit www.macomtech.com for additional data sheets and product information.




Radar Pulsed Power Transistor 30W, 3.1-3.4 GHz, 1µs Pulse, 10% Duty


# M/A-COM Products Released, 10 Jul 07

## **RF Test Fixture Impedance**


F (GHz)	Z <sub>IF</sub> (Ω)	Z <sub>OF</sub> (Ω)
3.10	16.0 + j5.0	19.0 + j3.0
3.25	14.5 + j2.0	15.5 - j2.0
3.40	11.5 + j0.0	10.0 - j3.5

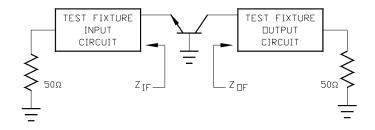

## **Test Fixture Circuit Dimensions**

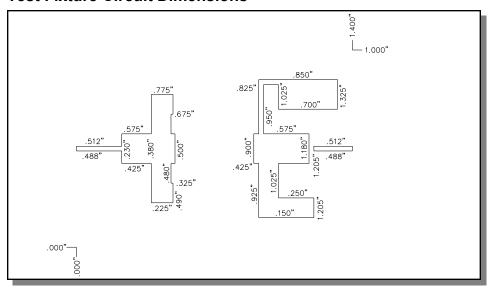

**Test Fixture Assembly** 

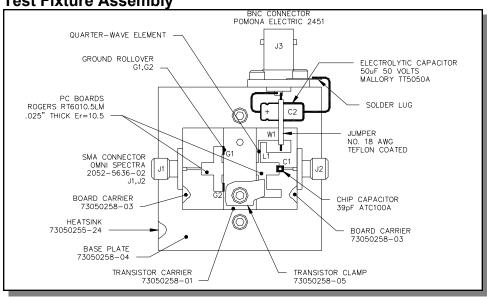

2

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

- North America Tel: 800.366.2266 / Fax: 978.366.2266
- Europe Tel: 44.1908.574.200 / Fax: 44.1908.574.300
- Asia/Pacific Tel: 81.44.844.8296 / Fax: 81.44.844.8298
  Visit www.macomtech.com for additional data sheets and product information.

# AMEYA360 Components Supply Platform

# **Authorized Distribution Brand:**

























## Website:

Welcome to visit www.ameya360.com

## Contact Us:

## Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

## > Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

## Customer Service :

Email service@ameya360.com

# Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com