

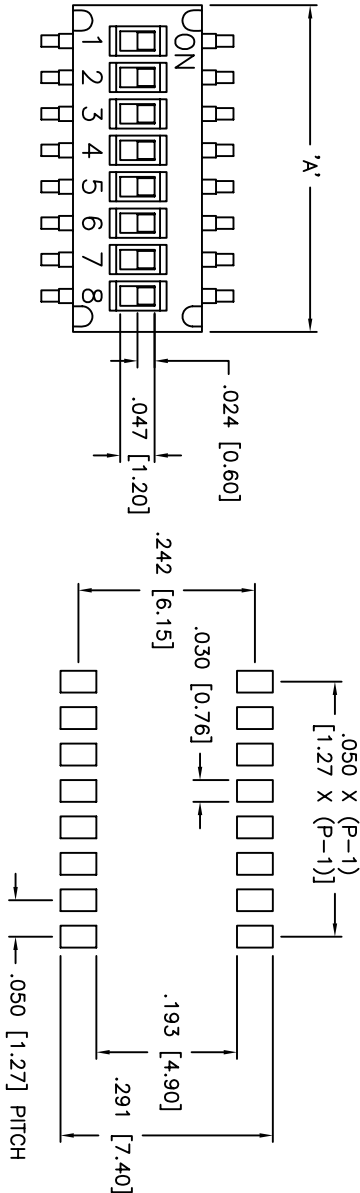


THIS DOCUMENT IS THE PROPERTY OF APDM COMPONENTS AND SHALL NOT BE COPIED, REPRODUCED, DISCLOSED OR USED AS THE BASIS FOR MANUFACTURING OR SALE WITHOUT PERMISSION OF A DULY AUTHORIZED REPRESENTATIVE OF APDM COMPONENTS INC.



UNLESS OTHERWISE SPECIFIED
P.C. TOLERANCES ARE $\pm .002$ [0.05]

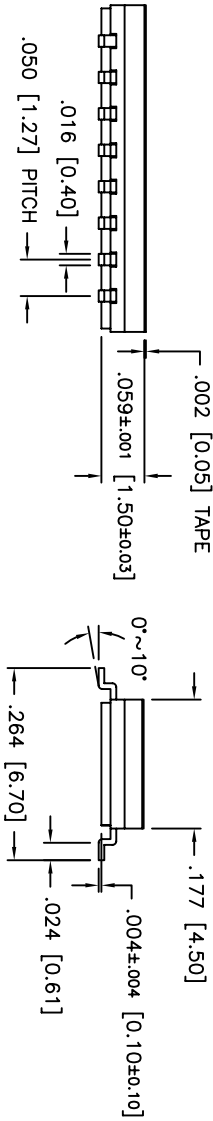

CIRCUIT DIAGRAM

MODEL NUMBER	NO. OF POSITIONS	DIMENSION 'A'
DHN02	2	.148 [3.77]
DHN04	4	.248 [6.31]
DHN06	6	.348 [8.85]
DHN08	8	.448 [11.39]
DHN10	10	.548 [13.93]

PROD. NO.: DHN*****
PROD. SERIES: _____
NUMBER OF POSITIONS: _____
02 = 2
04 = 4
06 = 6
08 = 8
10 = 10
PLATING: _____
 $\square = 3\mu$ GOLD MIN.
 $A = 10\mu$ GOLD MIN.
SEALING
 $\square =$ REGULAR
 $\square =$ TOP TAPE SEAL
 $\square =$ IN ON POSITION
 $\square =$ IN OFF POSITION
PAKAGING
 $\square =$ TUBE
T/R = TAPE & REEL

DESCRIPTION: SURFACE MOUNT DIP SWITCH
WITH TAPE SEAL OPTION.
SPECIFICATIONS:

SWITCHING RATING: 25mA, 24VDC.
NON-SWITCHING RATING: 100MA, 50VDC.
CONTACT RESISTANCE: 100 MOHMS MAX
DIELECTRIC STRENGTH: 300VAC for 1 MINUTE.
INSULATION RESISTANCE: 100MOHMS MIN. AT 500VDC
CAPACITANCE: 5PF AT 1MHZ $\pm$ 10KHZ MAX.

OPERATING FORCE: 500 gf MAX.
STROKE: 0.6mm

OPERATING TEMP: -40° to 85° C.
STORAGE TEMP: -40° to 85° C.

ELECTRICAL LIFE: 1,000 CYCLES.
MECHANICAL LIFE: 1,000 OPERATIONS.

CIRCUIT: 1 POLE 1 THROW.

VIBRATION TEST: PASSES METHOD 201A. MIL-STD-202F.
SHOCK TEST: 50g PER METHOD 213B. MIL-STD-202F.

MATERIALS:

BASE & COVER: UL94V-0 NYLON HIGH-TEMP. THERMOPLASTIC
COLOR, BLACK
ACTUATOR: LCP HIGH-TEMP. THERMOPLASTIC.
COLOR, WHITE

CONTACT: PHOSPHOR BRONZE WITH GOLD PLATING
TERMINAL: BRASS WITH GOLD PLATING

TAPE: KAPTON

SOLDERING:
HAND SOLDERING: 350C FOR 5 SECONDS MAX.
REFLOW: 260C FOR 5-10 SECONDS

DATE	SYM	REVISION RECORD	DWN.	CK.
3/08	B	ECO# 785		CD

APDM 63 Neck Rd. Horseshoe Bend, AL 35895 Phone: 205-372-3554 Fax: 205-372-3554		DESIGNATES CRITICAL DIMENSION	DEL. INSECT.	DRG. NO.	CUD
TOLERANCES (UNLESS OTHERWISE SPECIFIED)	SHEET	SIZE	SCALE	THIRD ANGLE PROJECTION	
.XX $\pm$.XX [0.5] .XX $\pm$.XX [0.2] .XXX $\pm$.XXX [0.02] ANGLE = 30.5°	1 OF 1	B	B:1		
TITLE	HALF PITCH DIP SWITCH				
DATE	3/20/08	DRAWING NO.	DHN*****		
DO NOT SCALE DRAWING					REV. B

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com