


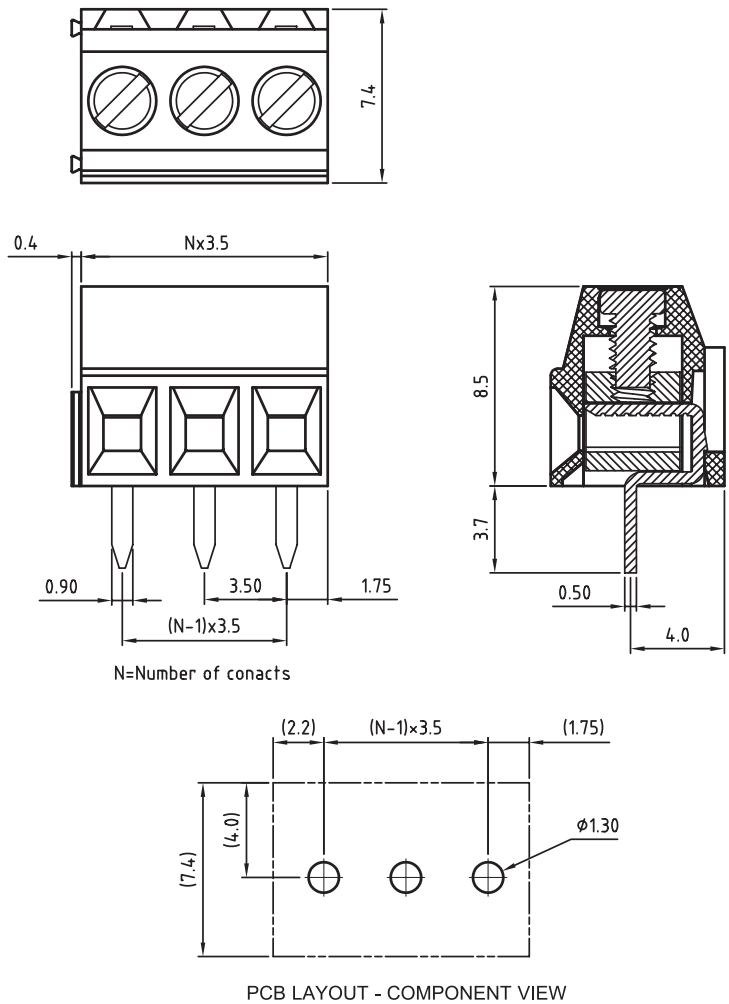

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PA 66
FLAMABILITY RATING: UL94-V0
COLOR: GREEN
METAL HOUSING: BRASS (CuZn)
TERMINAL SCREW SLOT TYPE: "I"
CONTACT: BRASS
SOLDER TAIL PLATING: TIN

ENVIRONMENTAL
OPERATING TEMPERATURE: -40 UP TO 105°C
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 10A
WORKING VOLTAGE: 300VAC
WITHSTANDING VOLTAGE: 1.6KV
CONTACT RESISTANCE: 20 mOhm max

STANDARD
ULus CERTIFIED E315414 / MODEL NUMBER 2141


MECHANICAL
SOLID WIRE: 24-16AWG / 0.2-1.5MM²
STRANDED WIRE: 24-16AWG / 0.2-1.5MM²
TORQUE: 1.7Lb-In / 0.20Nm

WIRE STRIPE LENGTH: 5-6MM
SCREW: M2.0
PITCH: 3.5MM

SOLDERING: WAVE PROCESS ONLY

PACKAGING: BOX

SERIE 2141

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK		DESCRIPTION: SERIE 2141 - 3.5MM HORIZONTAL ENTRY MODULAR WITH RISING CAGE CLAMP - 1.5MM² WIRES WR-TBL WERI PART NO: 691 214 110 0xx	SIZE A4
G									
F									
E									
D									
C	07-JUL-11	COLOR	GG	APPROVAL: RJ	UNIT: MM				
B	12-OCT-09	STANDARD	JP		SCALE:				
A	30-OCT-08	PDF	JP		SHEET: 1/1				
REV	DATE	FILE	BY		DRAW: MARVIN				

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com