



2N7002

N-Channel MOSFET

Features

- Halogen free available upon request by adding suffix "-HF"
- Epoxy meets UL 94 V-0 flammability rating
- Moisture Sensitivity Level 1
- Advanced Trench Process Technology
- High Input Impedance
- High Speed Switching
- CMOS Logic Compatible Input
- Marking : 7002/S72

Maximum Ratings @ 25°C Unless Otherwise Specified

Symbol	Rating	Rating	Unit
V_{DS}	Drain-source Voltage	60	V
I_D	Drain Current	115	mA
P_D	Total Power Dissipation	200	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	625	°C/W
T_J	Operating Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C


Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage ($V_{GS}=0V_{dc}$, $I_D=10\mu A_{dc}$)	60	---	---	Vdc
$V_{th(GS)}$	Gate-Threshold Voltage ($V_{DS}=V_{GS}$, $I_D=250\mu A_{dc}$)	1.0	---	2.5	Vdc
I_{GSS}	Gate-body Leakage ($V_{DS}=0V_{dc}$, $V_{GS}=\pm 20V_{dc}$)	---	---	± 100	nAdc
I_{DSS}	Zero Gate Voltage Drain Current ($V_{DS}=60V_{dc}$, $V_{GS}=0V_{dc}$) ($V_{DS}=60V_{dc}$, $V_{GS}=0V_{dc}$, $T_J=125^\circ C$)	---	---	1 500	μA_{dc}
$I_{D(ON)}$	On-state Drain Current ($V_{DS}=7.5V_{dc}$, $V_{GS}=10V_{dc}$)	500	2700	---	mA
$r_{DS(on)}$	Drain-Source On-Resistance ($V_{GS}=10V_{dc}$, $I_D=500mA_{dc}$) ($V_{GS}=5V_{dc}$, $I_D=50mA_{dc}$)	---	1.2 1.7	7.5 7.5	Ω
$V_{DS(on)}$	Drain-Source On-Voltage ($V_{GS}=10V_{dc}$, $I_D=500mA_{dc}$) ($V_{GS}=5V_{dc}$, $I_D=50mA_{dc}$)	---	---	3.75 1.5	Vdc
G_{FS}	Forward Transconductance ($V_{DS}=10V_{dc}$, $I_D=200mA_{dc}$)	80	---	---	ms
V_{SD}	Diode Forward Voltage ($V_{GS}=0V_{dc}$, $I_S=115mA_{dc}$)	---	---	1.5	Vdc
I_S	Maximum Continuous Drain-Source Diode Forward Current	-	---	115	mA
C_{iss}	Input Capacitance	---	---	50	pF
C_{oss}	Output Capacitance	---	---	25	
C_{rss}	Reverse Transfer Capacitance	---	---	5	

Switching

$t_{d(on)}$	Turn-on Time	$V_{DD}=30V_{dc}$, $V_{GEN}=10V_{dc}$	---	---	20	ns
$t_{d(off)}$	Turn-off Time	$R_L=150\Omega$, $I_D=200mA$, $R_{GEN}=25\Omega$	---	---	20	

SOT-23

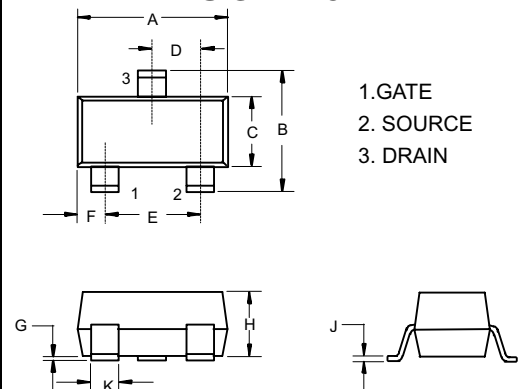

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.104	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Suggested Solder Pad Layout

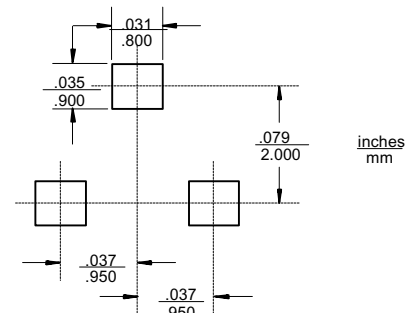


Fig. 1 – On-Resistance vs. Gate-to-Source Voltage

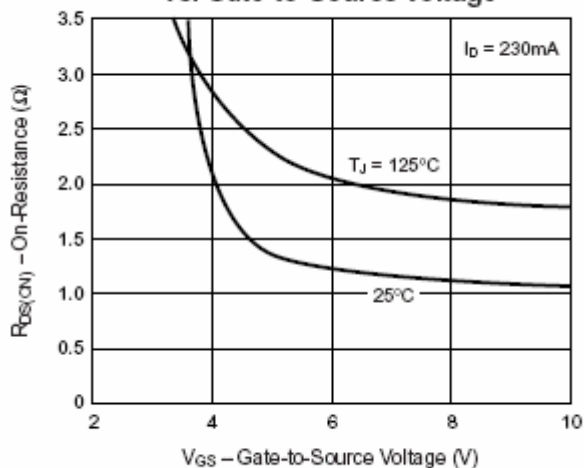


Fig. 2 – Source-Drain Diode Forward Voltage

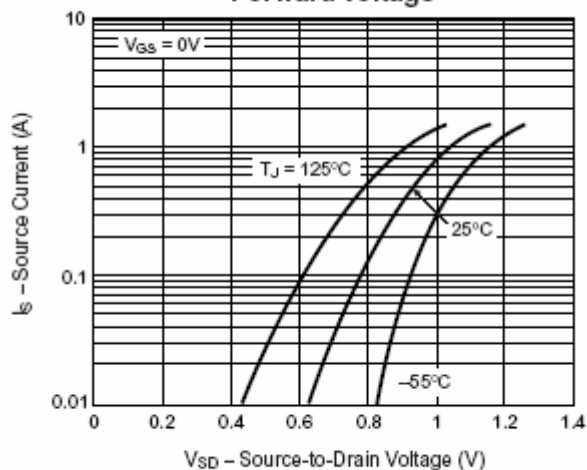


Fig. 3 – Output Characteristics

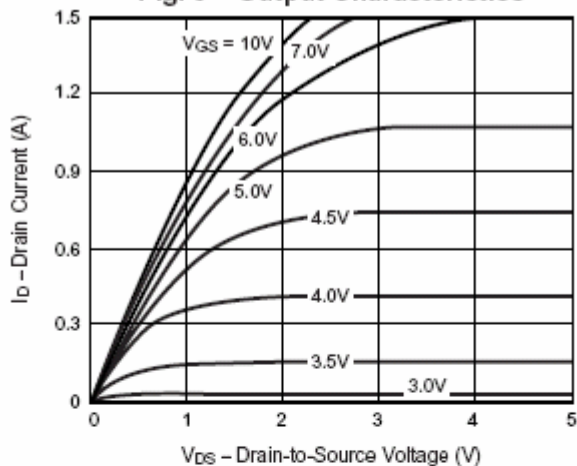


Fig. 4 – Transfer Characteristics

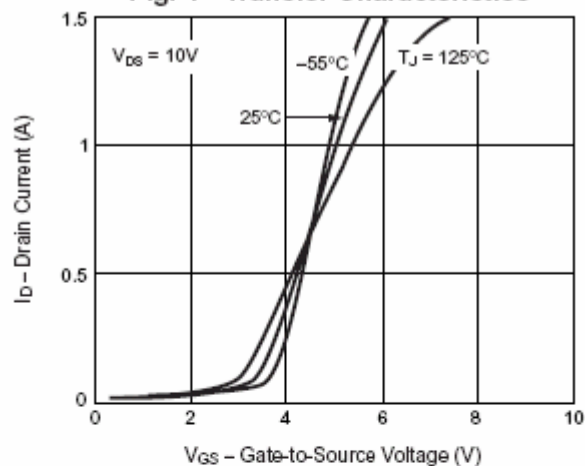


Fig. 5 – Capacitance

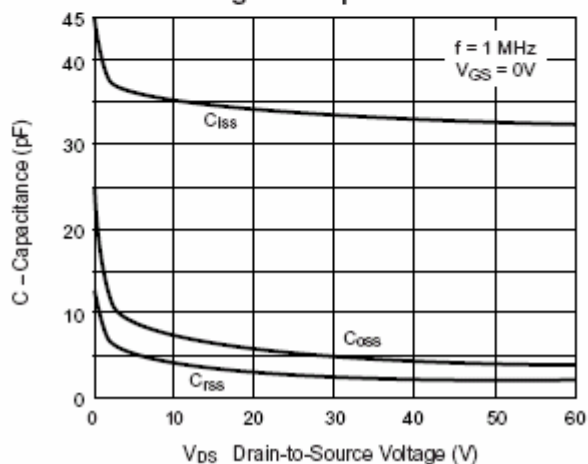


Fig. 6 – On-Resistance vs. Drain Current

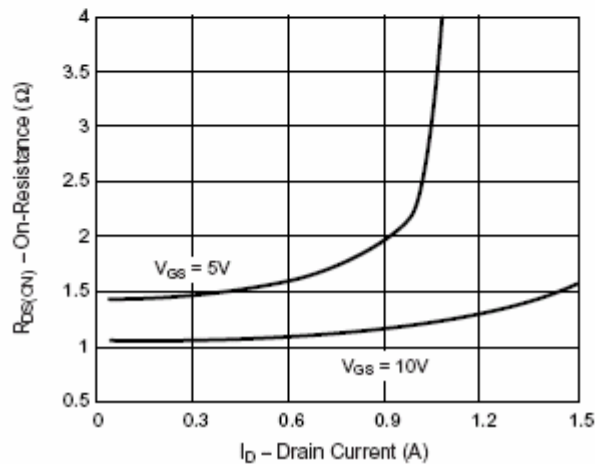


Fig. 7 – Gate Charge

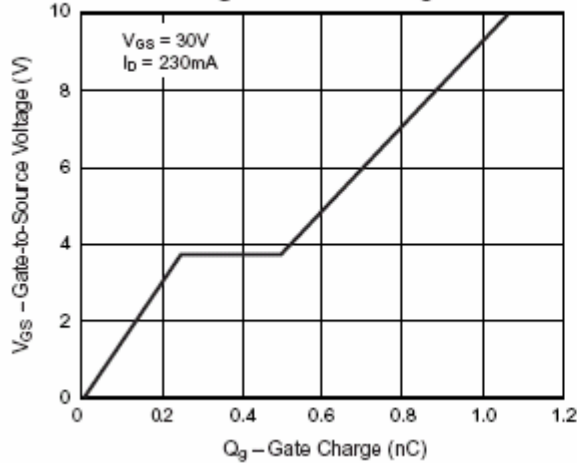


Fig. 8 – Breakdown Voltage vs. Junction Temperature

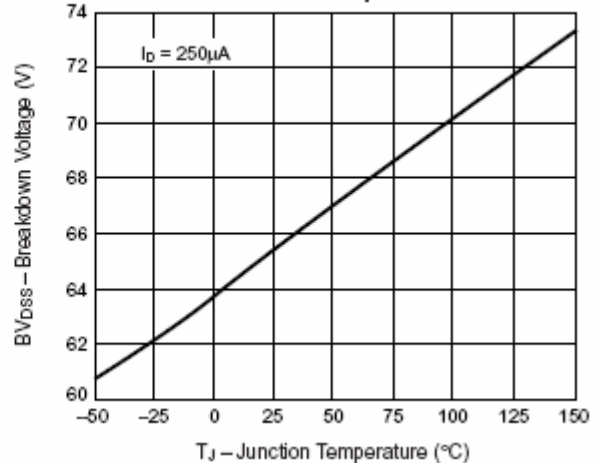


Fig. 9 – Threshold Voltage

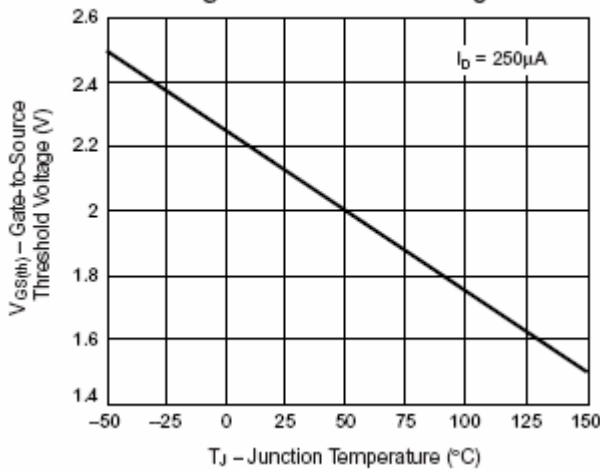


Fig. 10 – On-Resistance vs. Junction Temperature

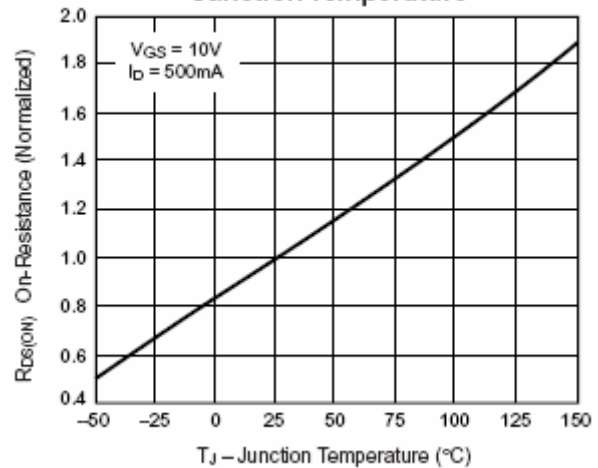


Fig. 11 – Thermal Impedance



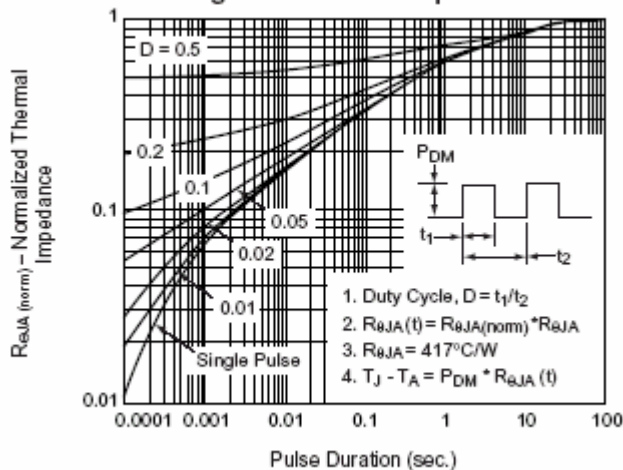


Fig. 12 – Power vs. Pulse Duration

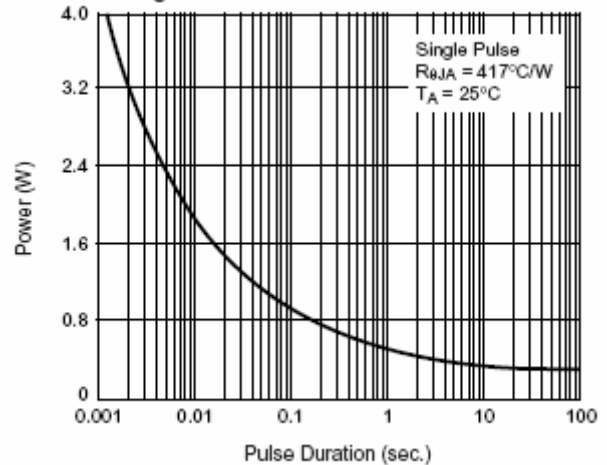

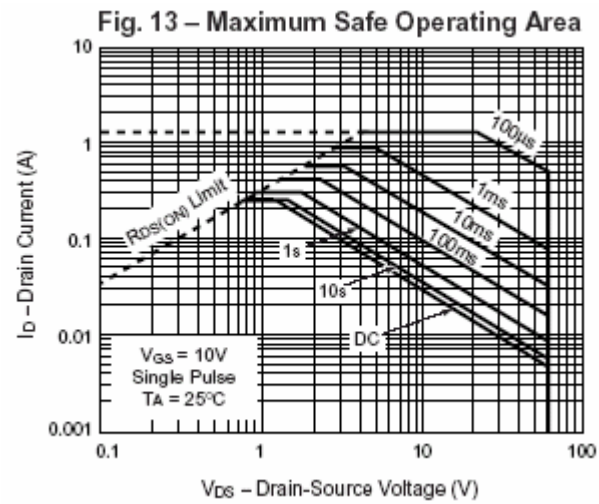

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 3Kpcs/Reel

Note : Adding "-HF" suffix for halogen free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com