


DESCRIPTION: 2MM DUAL ROW RECEPTACLE SMT

MATERIAL:
HOUSING: NYLON 6T (UL 94V-0) BLACK
CONTACT: PHOSPHOR BRONZE
PLATING: GOLD FLASH MATING SIDE
100u" TIN ON BOARD SIDE
RoHS COMPLIANT

ELECTRICAL:
CURRENT RATING: 1 AMP
CONTACT RESISTANCE: 20 mOHM MAX.
INSULATOR RESISTANCE: 5000 MEGOHMS MIN.
DWV: 500V AC
OPERATING TEMP:
-40°C TO +105°C
PROCESSING TEMP:
260°C FOR 10 SECONDS

"L" = NO. OF CONTACTS PER ROW X .079

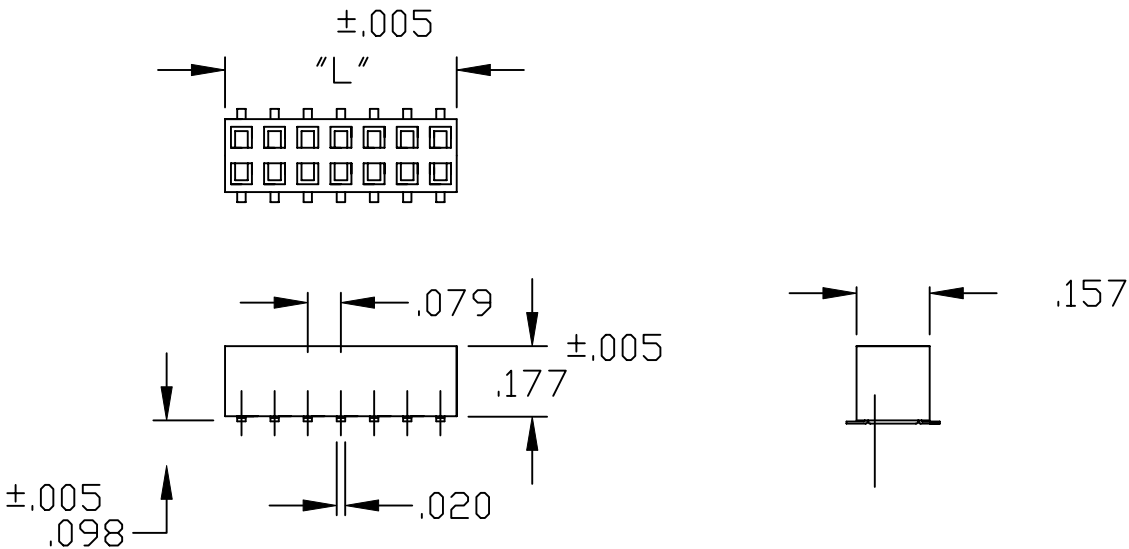


SERIES 2864 YY 06RP2
2864 = DUAL ROW

POSITIONS
DUAL - INCREMENTS OF 2
(06 TO 80)

TYPE:
06 = SURFACE MOUNT

PLATING:
P2 = GOLD FLASH

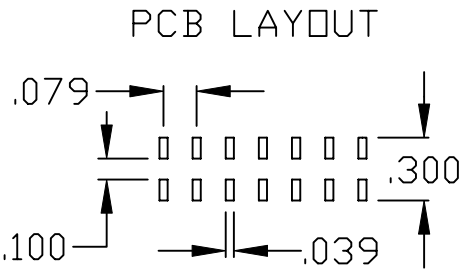

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: PAM JENKINS		DATE: 1-30-06		
		CHECKED:		DATE:		
NorComp			SCALE: NTS	SHEET 1 OF 1		REV 3
			DWG NO. 2864YY06RP2			

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com