


**HEYCO**




"Coined"  
edges prevent  
cable damage

## HEYClip™ SunRunner® Cable Clip


Double-Compression Design for panels up to .125" (3,2 mm) thick

- Robust "double-compression" design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20" (5,1 mm) to .30" (7,6 mm) in diameter.
- Designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel.
- SunRunner fits module frames up to .125" (3,2 mm) thick.
- **SunRunner EZ designed for thicker module frames** as well as racking – accommodates profiles up to .250" (6,4 mm) thick!
- Not for use in a marine salt water environment. Contact Heyco for alternative materials.

| PANEL THICKNESS CLAMPING RANGE |     |                |     | WIRE DIA. RANGE<br>Maximum<br>(2) Wires        | PART NO. | DESCRIPTION            | FOOTPRINT<br>A x B |             | OVERALL HEIGHT<br>C |     |
|--------------------------------|-----|----------------|-----|--|----------|------------------------|--------------------|-------------|---------------------|-----|
| Minimum<br>in.                 | mm. | Maximum<br>in. | mm. |  |          |                        | in.                | mm.         | in.                 | mm. |
| .055                           | 1,4 | .125           | 3,2 | .20" (5,1 mm) -<br>.30" (7,6 mm)<br>each cable | S6405    | SunRunner®<br>100 Pack | .97 x .50          | 24,6 x 12,7 | .39                 | 9,9 |
|                                |     |                |     |  | S6445    | SunRunner®<br>Bulk     |                    |             |                     |     |



SunRunner®  
(above)

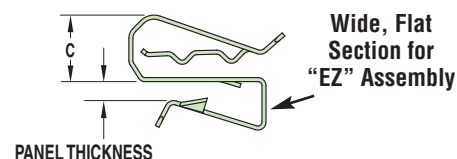

SunRunner® EZ  
(below)



SunRunner® EZ with (optional) SunBundler (page 1-19)  
looped through slot

## HEYClip™ SunRunner® EZ™ Cable Clip

Double-Compression Design for Panels up to .250" (6,4 mm) Thick

| PANEL THICKNESS CLAMPING RANGE |     |                |     | WIRE DIA. RANGE<br>Maximum<br>(2) Wires        | PART NO. | DESCRIPTION               | FOOTPRINT<br>A x B |             | OVERALL HEIGHT<br>C |      |
|--------------------------------|-----|----------------|-----|--|----------|---------------------------|--------------------|-------------|---------------------|------|
| Minimum<br>in.                 | mm. | Maximum<br>in. | mm. |  |          |                           | in.                | mm.         | in.                 | mm.  |
| .090                           | 2,3 | .250           | 6,4 | .20" (5,1 mm) -<br>.30" (7,6 mm)<br>each cable | S6407    | SunRunner® EZ<br>100 Pack | .97 x .50          | 24,6 x 12,7 | .41                 | 10,4 |
|                                |     |                |     |  | S6447    | SunRunner® EZ<br>Bulk     |                    |             |                     |      |



*Quick  
Specs*

Material .025" thick 304 stainless steel

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype       ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com