

SINGLE SUPPLY DUAL COMPARATOR

■ GENERAL DESCRIPTION


The NJM12903 is a single-supply dual voltage comparator, which can operate from 2V supply. The features are low input offset voltage, low input bias current and low current consumption.

The NJM12903 compare the input signal to 0V (ground) due to the Darlington PNP input stage. In addition, small packages TVSP, VSP and SSOP are available. The NJM12903 is suitable for any kind of signal comparator.

■ FEATURES


- Operating Voltage +2V~+14V
- Open Collector Output
- Bipolar Technology
- Package Outline
 - DIP8, SIP8, DMP8, SSOP8
 - SOP8 JEDEC 150mil
 - MSOP8 (VSP8) MEET JEDEC MO-187-DA
 - MSOP8 (TVSP8) MEET JEDEC MO-187-DA / THIN TYPE

■ PACKAGE OUTLINE

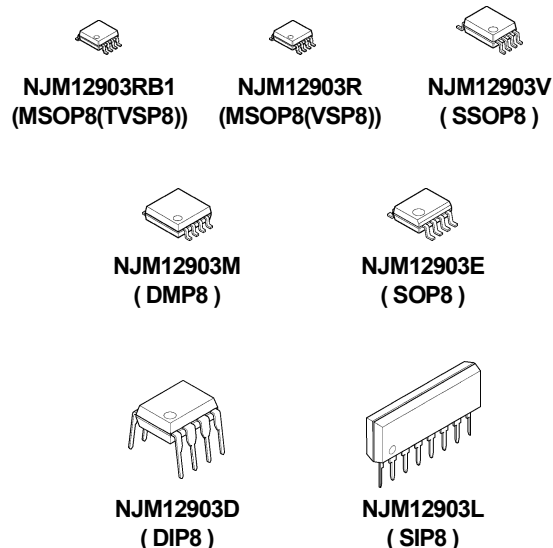


■ PIN CONFIGURATION

(Top View)



NJM12903D/NJM12903M
NJM12903E/NJM12903V
NJM12903R/NJM12903RB1




NJM12903L

PIN FUNCTION

1. A OUTPUT
2. A -INPUT
3. A +INPUT
4. GND
5. B +INPUT
6. B -INPUT
7. B OUTPUT
8. V⁺

■ EQUIVALENT CIRCUIT (1/2 Shown)

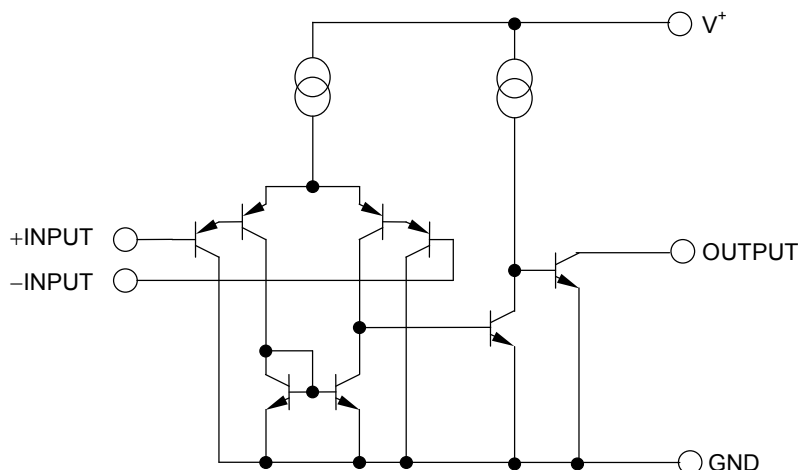

NJM12903

■ ABSOLUTE MAXIMUM RATINGS(Ta=25°C)







PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V^+	15	V
Differential Input Voltage	V_{ID}	14 (note1)	V
Common Mode Input Voltage	V_{IC}	-0.3~+14 (note1)	V
Power Dissipation	P_D	DIP8 500	mW
		DMP8 300	
		EMP8 300	
		SSOP8 250	
		MSOP8(VSP8/TVSP8) 320	
		SIP8 800	
Operating Temperature Range	T_{opr}	-40~+85	°C
Storage Temperature Range	T_{stg}	-50~+125	°C

(Note1) For supply voltage less than 14V, the maximum input voltage is equal to the supply voltage.







■ ELECTRICAL CHARACTERISTICS($V^+=5V$, Ta=25°C unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V_{OPR}		2	-	14	V
Input Offset Voltage	V_{IO}	$R_s=0\Omega$, $V_o\approx 1.4V$	-	1	4	mV
Input Offset Current	I_{IO}		-	5	50	nA
Input Bias Current	I_B		-	30	200	nA
Large Signal Voltage Gain	A_V	$R_L=15k\Omega$	-	106	-	dB
Common Mode Input Voltage Range	V_{ICM}		0~3.5	-	-	V
Response Time	t_R	$R_L=5.1k\Omega$	-	0.5	-	μs
Output Sink Current	I_{SINK}	$V_{IN^+}=0V$, $V_{IN^-}=1V$, $V_o=1.5V$	6	10	-	mA
Output Saturation Voltage	V_{SAT}	$V_{IN^+}=0V$, $V_{IN^-}=1V$, $I_{SINK}=3mA$	-	80	300	mV
Output Leakage Current	I_{LEAK}	$V_{IN^+}=1V$, $V_{IN^-}=0V$, $V_o=5V$	-	0.1	1	μA
Supply Current	I_{CC}		-	0.4	1	mA

■ TYPICAL CHARACTERISTICS

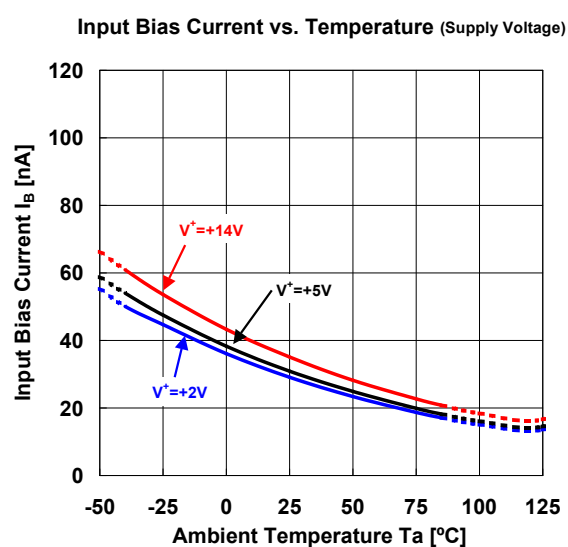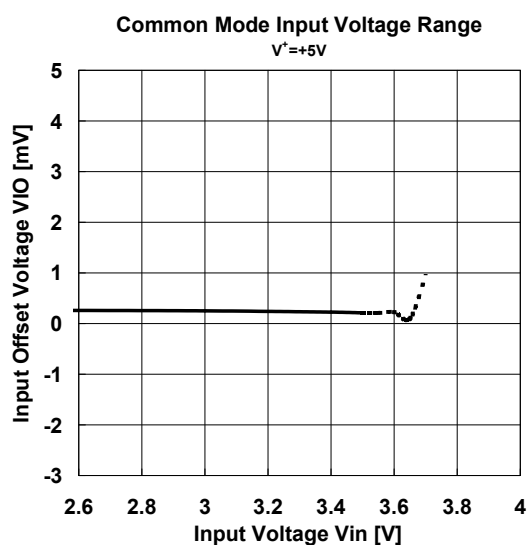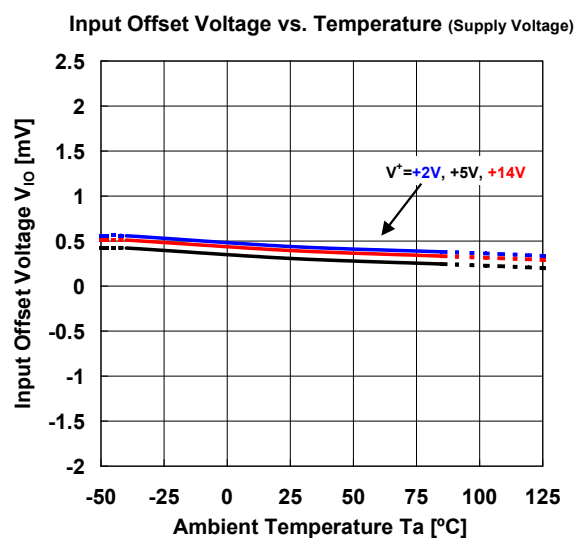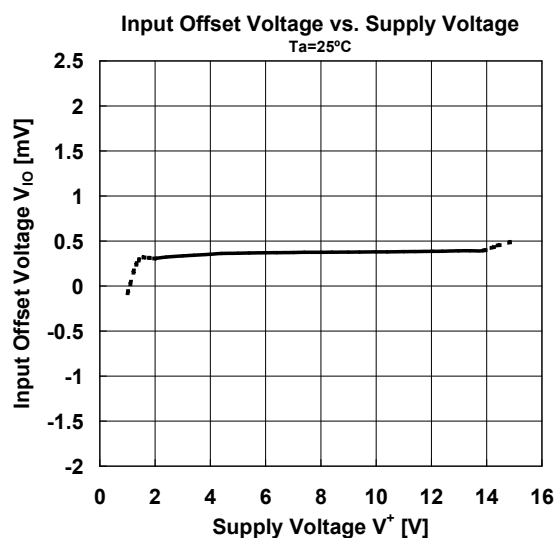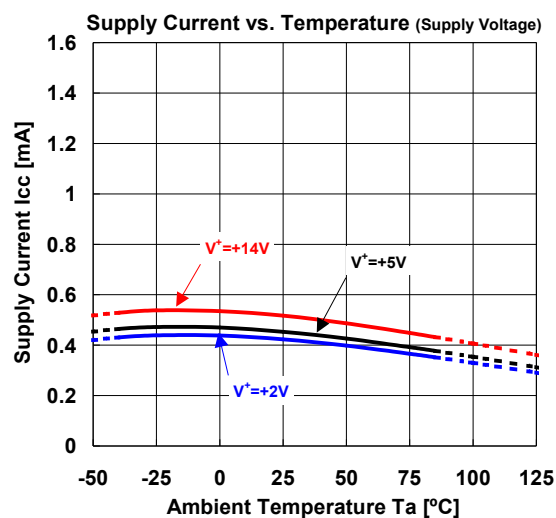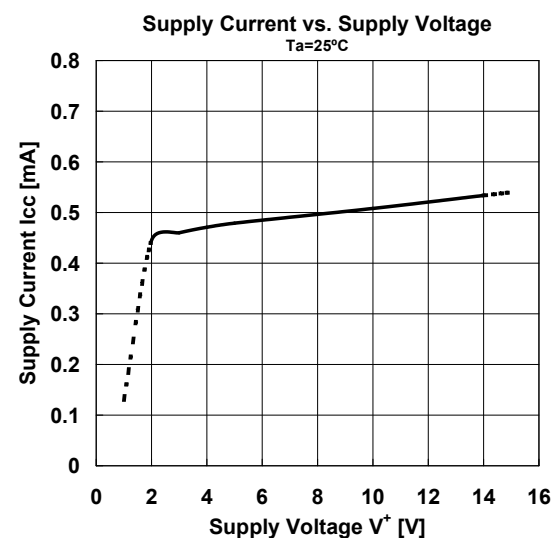

■ TYPICAL CHARACTERISTICS

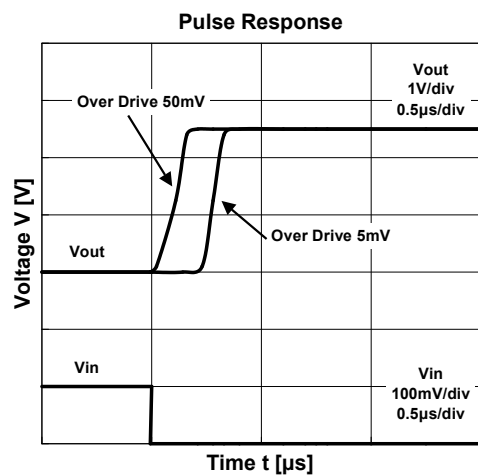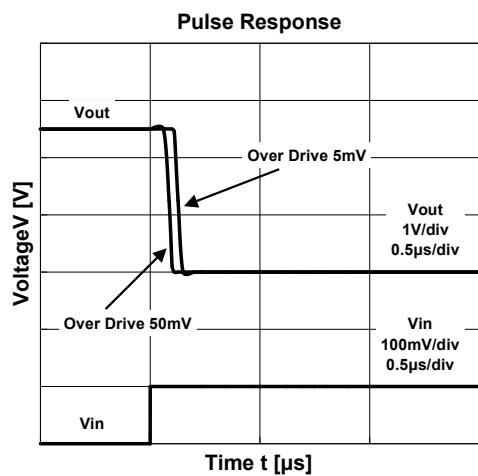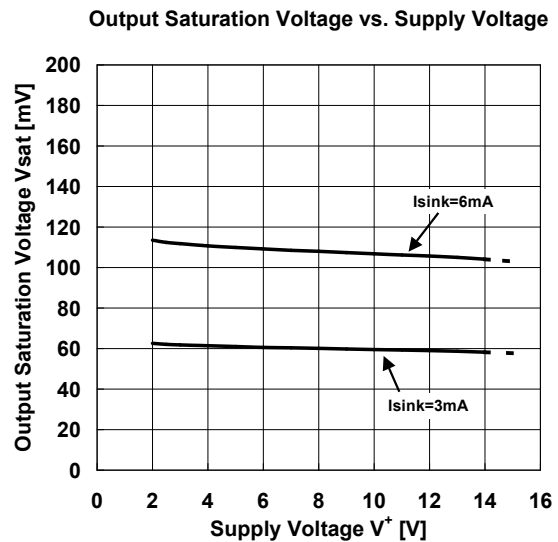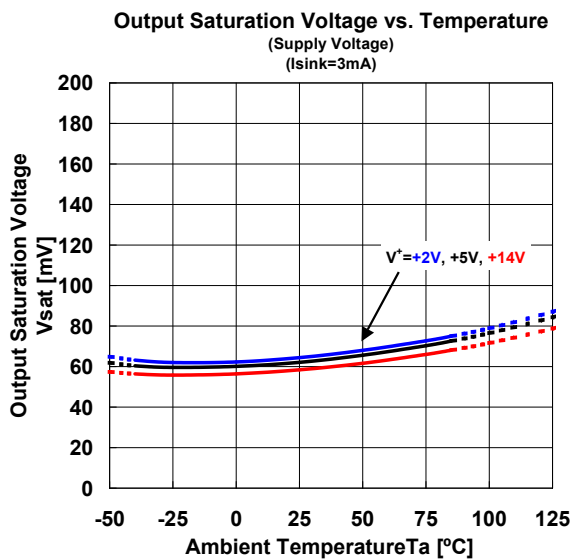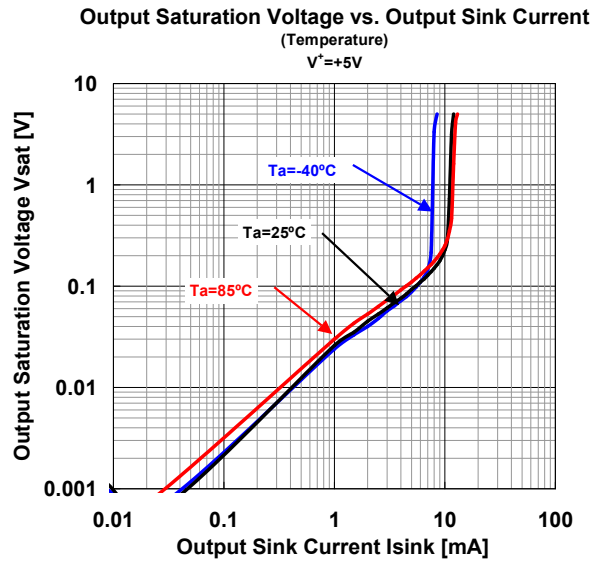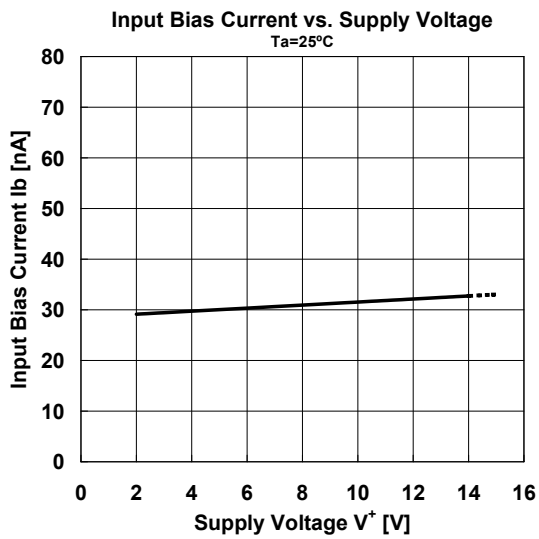

[CAUTION]
The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com