


DF59M Series

Horizontal Mate, Mono-pole Wire to Board Connector



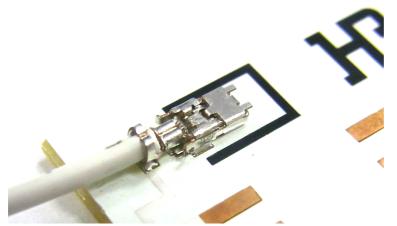

*as of July 2014


Features

- 1. Housing-less small and low profile mono-pole connector
- 2. Clear tactile click and high mating force with positive lock
- 3. High current capability rated up to 6 Amps using AWG#22 cable
- 4. AWG#28 to 22 with jacket outer dia. ϕ 0.9 to 1.6 mm
- 5. Will be UL certified
- 6. RoHS compliant, Halogen-free* product

*This product satisfies halogen free requirements defined as 900 ppm maximum chlorine, 900 maximum bromine, and 1500 ppm maximum total of chlorine and bromine.

Suitable for High Density Mounting LED Modules

Mated (5.9) 4.6 2.15



Height at crimped portion is different depending on the cable type. Ex.) UL10368 AWG22: A=1.8 mm
UL10368 AWG28: A=1.7 mm

Specifications

Material & Finish

Item	Material	Finish
Plug	Copper Alloy	Tin-plating (Copper underplating)
Receptacle	Copper Alloy	Tin-plating (Copper underplating)

Performance Characteristics

Rated Current	AWG#22: 6 Amps, AWG#24: 5 Amps AWG#26: 4 Amps, AWG#28: 3 Amps	
Rated Voltage	AC/DC 300V (Parallel layout, 1.6 mm spacing between pads)*	
Operating Temperature Range	-40 °C to + 105 °C	
Applicable Cable	AWG22 to 28, Jacket Outer Dia. <i>ϕ</i> 0.9 to 1.6 mm (Crimp terminal 2224, 2628)	
Contact Resistance	45mΩ Max. (6V, 100 mA)	
Durability	20 times	

 1.6 mm or more creepage distance is required for the 300 V rating under IEC60664 and JIS C 60664 standards (Printed Wiring Material, Pollution Level 2)

Specifications herein are subject to change without notice. Contact Hirose for latest specifications, drawings or availabilities.

AMEYA360 Components Supply Platform

Authorized Distribution Brand:

























Website:

Welcome to visit www.ameya360.com

Contact Us:

> Address:

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd Minhang District, Shanghai , China

> Sales:

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

Customer Service :

Email service@ameya360.com

Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com