

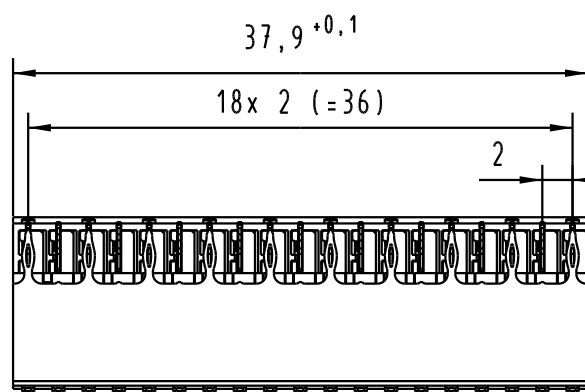
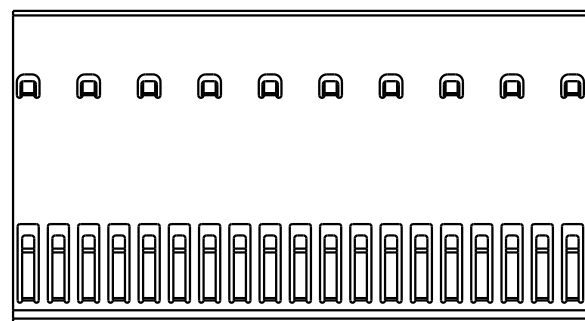
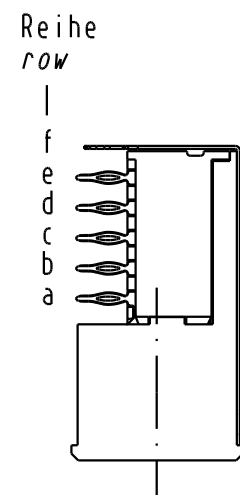
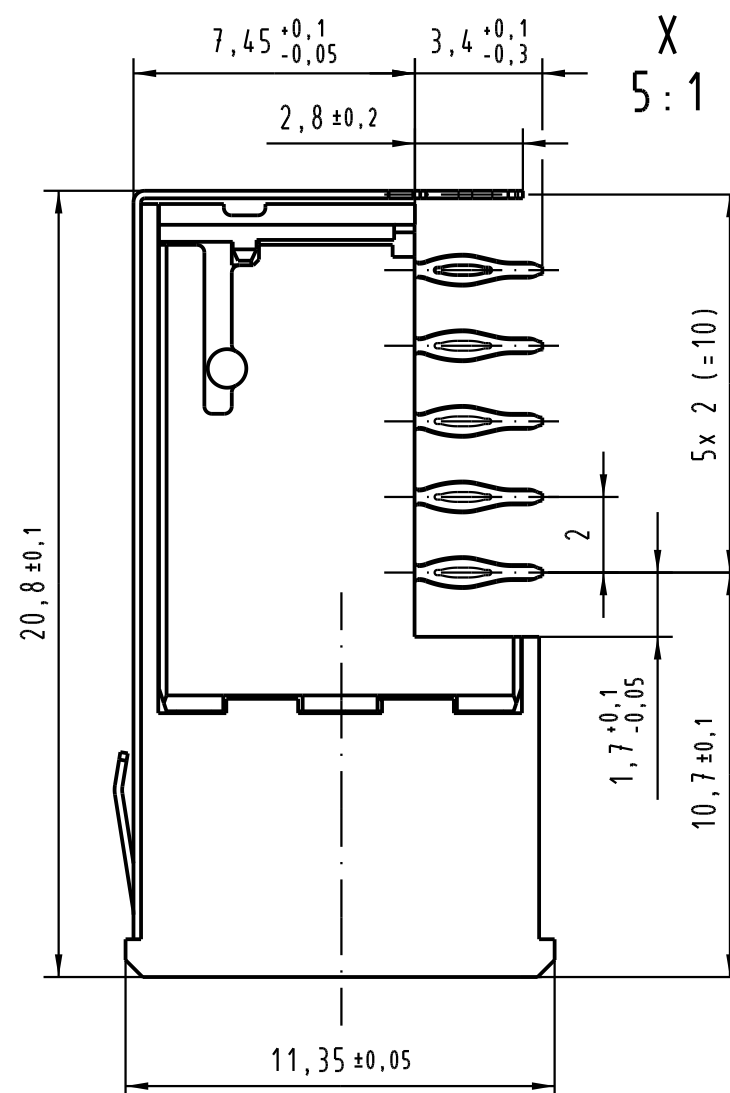
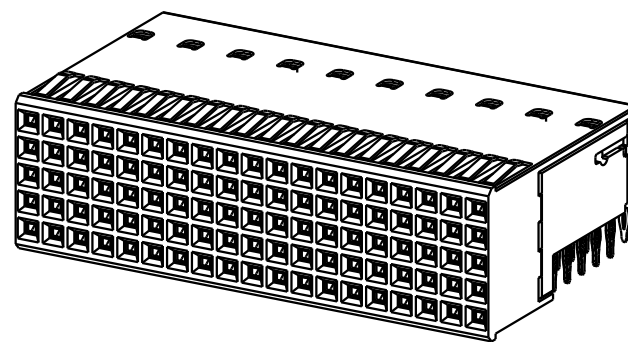


Alle Rechte vorbehalten. All rights reserved

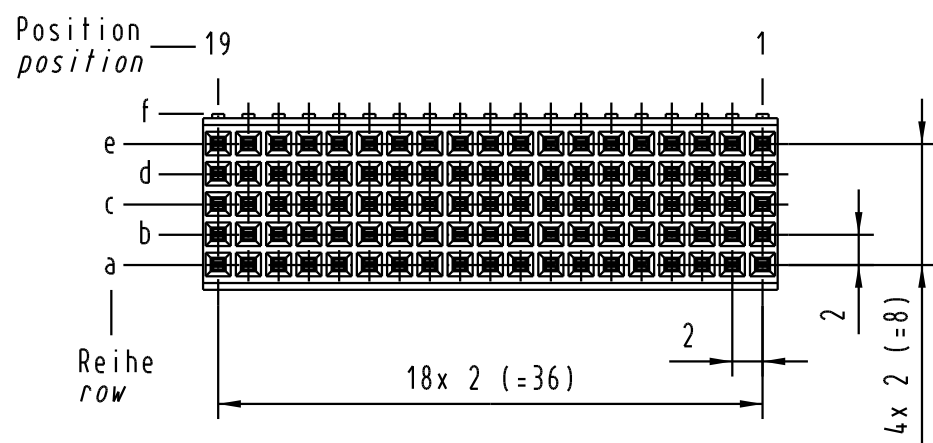

**Lochbild board drillings**

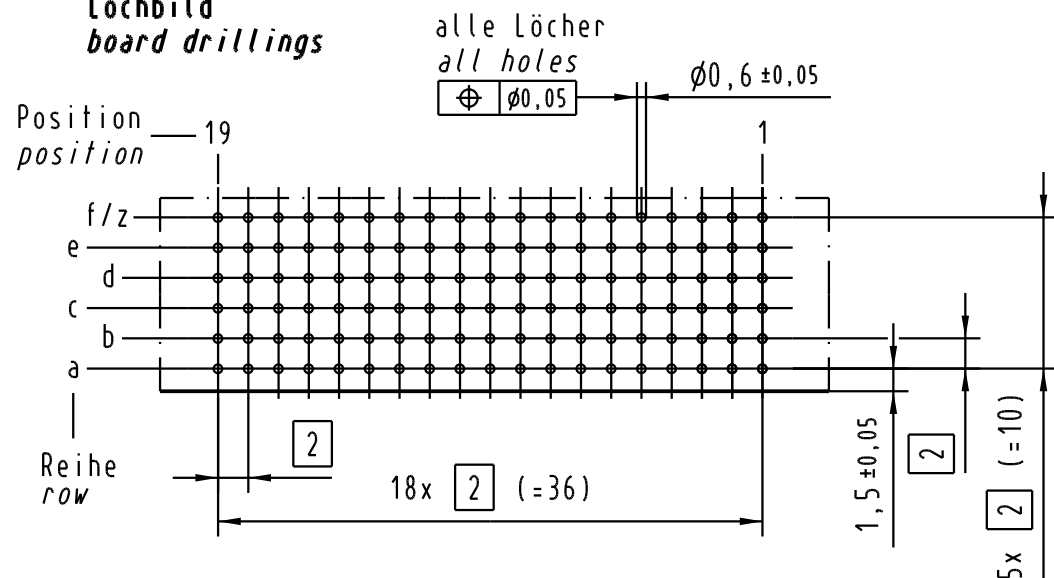

Bohrlochdurchmesser:  $\phi 0,7 \pm 0,02$  mm  
Lochdurchmesser (mit Oberfläche):  $\phi 0,6 \pm 0,05$  mm  
drill hole dia.:  $\phi 0,7 \pm 0,02$  mm  
through hole dia. (after plating):  $\phi 0,6 \pm 0,05$  mm

17 25 095 4102	—	min. 0,76 μm (30 μin) Au über/over min. 1,27 μm (50 μin) Ni
17 25 095 2102	2	Au über/over Ni
17 25 095 1102	1	Au über/over Ni
Bestell-Nr. part-no.	Anforderungsstufe nach IEC performance level acc. to IEC	Kontaktoberfläche nach IEC contact plating acc. to IEC

All Dimensions in mm Original Size DIN A 3		Techn. Character.		Nicht tolerierte Maß Free size tolerances IEC 61076-4-101		
					har-bus HM Federleiste, Typ B-19, 95 pol. mit Schirmblech Reihe-f har-bus HM female connector, type B-19, 95 pol. with shield row-f	
32387	18.11.04	Hl.	Insp.	30.06.99		<b>2:1</b> (5:1)
29412	07.05.01	Lk	Stand.	30.06.99		
28494	21.09.00	Koe	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP		<b>TB 17 25 095 x102</b>	
25016						
Mod.	Dat.	Name			Blatt / page	

## Authorized Distribution Brand :



## Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

## Contact Us :

### ➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

### ➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

### ➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

### ➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)