

F

E

D

C

B

A

F








E

D

C


B

A

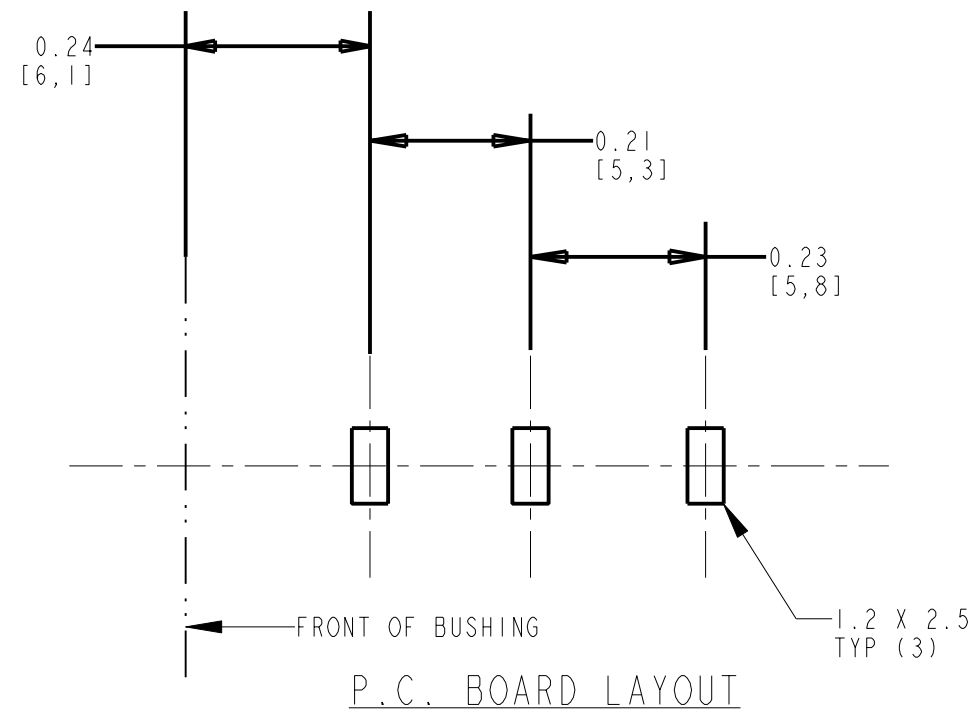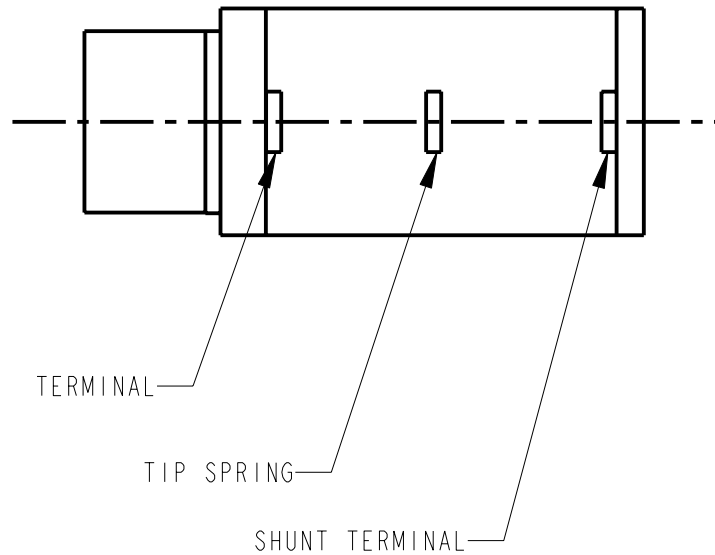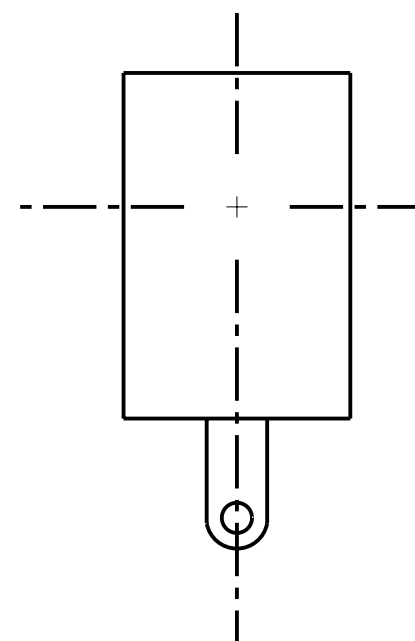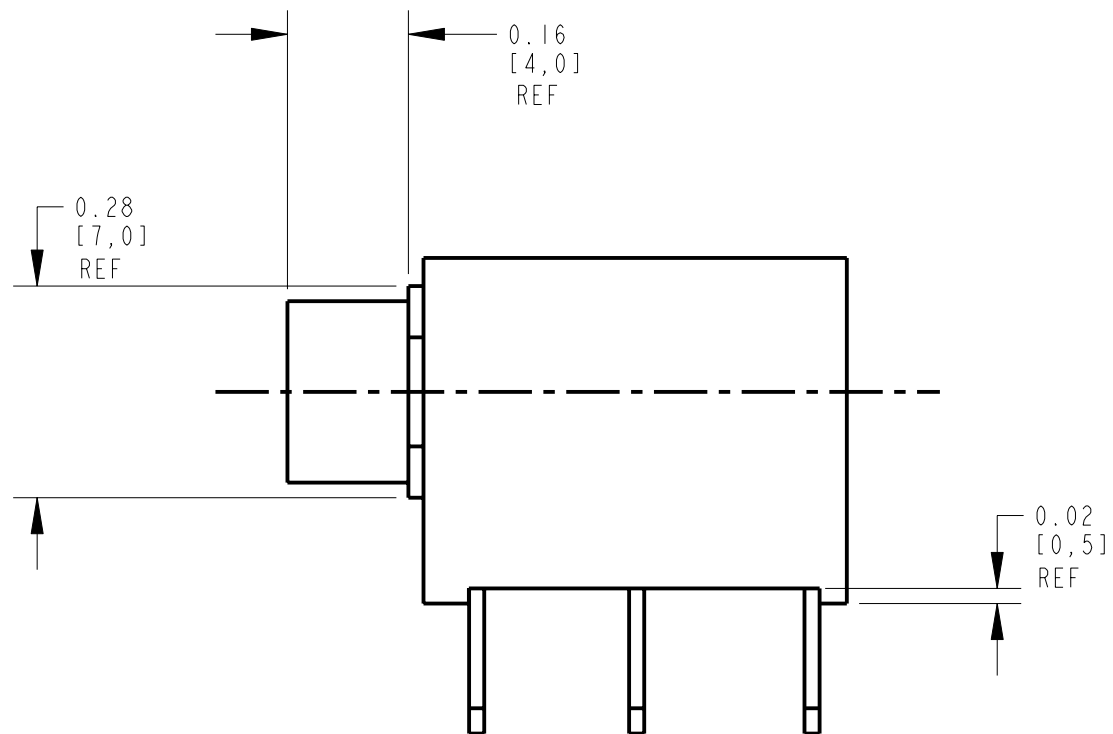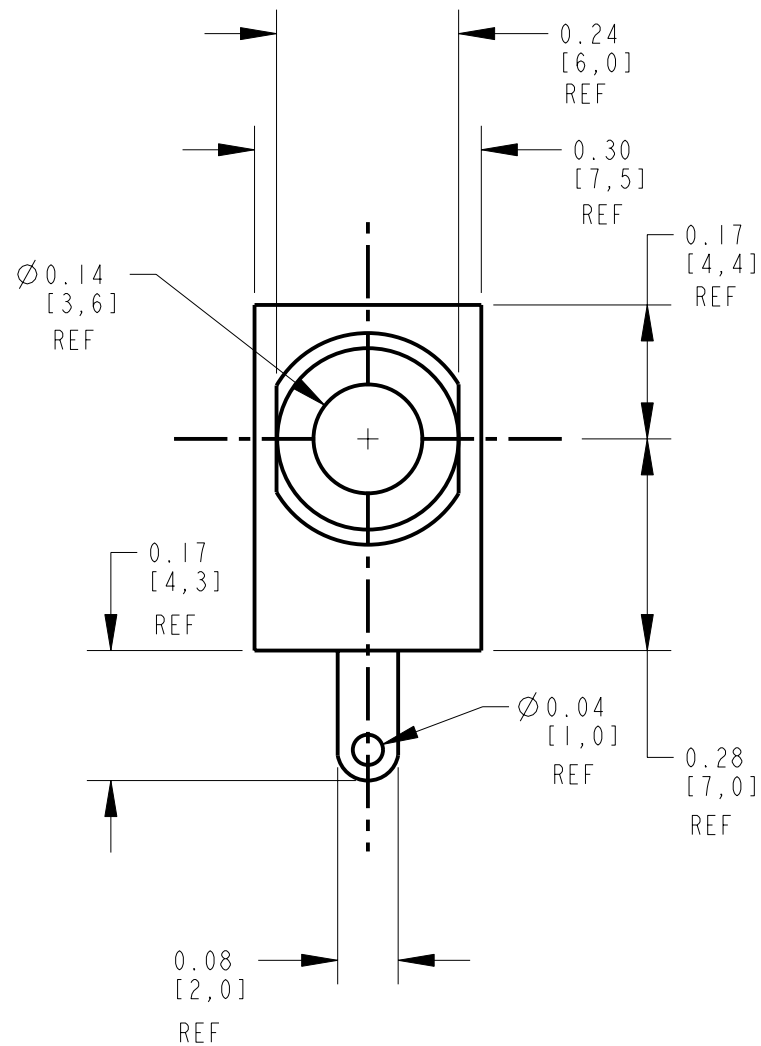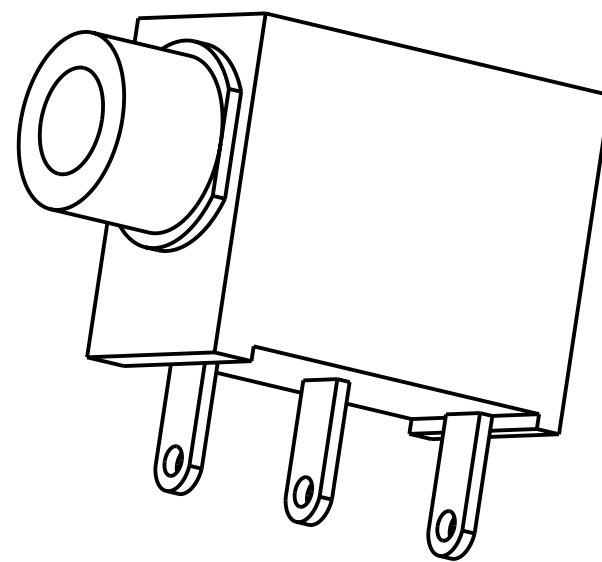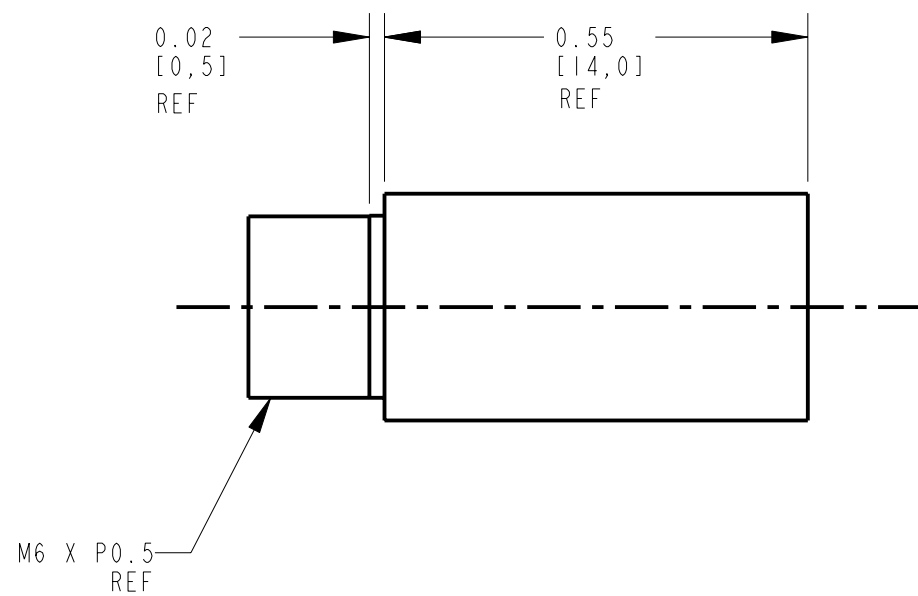

SPECIFICATIONS:

1. CONTACT RESISTANCE: 20 mΩ MAX
2. INSULATION RESISTANCE: 100 mΩ MIN. AT 250V DC.
3. DIELECTRIC STRENGTH: 250V AC 1 MINUTE.
4. LIFE TEST: JACK SHALL WITHSTAND 5000 CYCLES OF INSERTION AND WITHDRAWAL WITH TESTING PLUG, AFTER TEST THE CONTACT RESISTANCE SHALL NOT EXCEED 0.1 Ω
5. MEASURING CONDITION: TEMPERATURE FORM 5°C TO 35°C
RELATIVE HUMIDITY FOR 40% TO 85%.
6. INSERTION FORCE: 0.4Kg~1.6Kg.
7. WITHDRAWAL FORCE: 0.4Kg~1.2Kg.

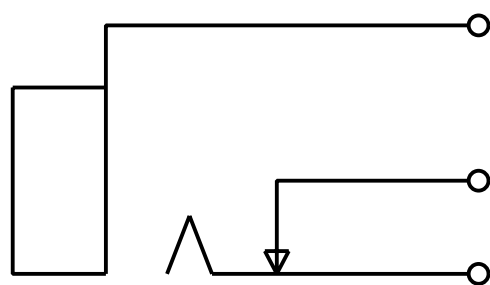

CIRCUIT DIAGRAM

CUSTOMER DRAWING

						★ STAR SYMBOL DENOTES CRITICAL DIMENSION UNLESS OTHERWISE SPECIFIED 1. ALL DIMENSIONS IN INCHES -TWO PLACE DECIMALS ±0.01 -THREE PALCE DECIMALS ±0.005 -FRACTIONAL DIMENSIONS ±1/64 -ANGLES ±1° -ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R. 2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002 3. REMOVE ALL BURRS DO NOT SCALE DRAWING	THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.					
							SIZE	WIDTH	MULT	LBS/M	TEMPER	
							FINISH SPEC No.			MATERIAL SPEC No.		
							FIRST USED ON		SCALE 4.000		Switchcraft® SHEET OF PART No. 35RAPC2AV REV B	
B	ECO #20278	11-5-96	MM	JC			DATE DRAWN 28-Oct-93	BY LR	CHKD LR 11-2-93	APVD JC 11-2-93		
A	FIRST DRAWN	10-28-93	LR	JC			NAME 3.5 MM MONO JACK					
REV	ECO NUMBER	DATE	BY	APVD								
REVISIONS												

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :
401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :
Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :
Email service@ameya360.com

➤ Partnership :
Tel +86 (21) 64016692-8333
Email mkt@ameya360.com