

"High Frequency Ceramic Solutions"

1810 MHz Directional Coupler

Detail Specification 01/22/2003

P/N 1810CP14A200



Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Return Loss	Coupling	Isolation
1810CP14A200_	1710 - 1910	0.30 dB max	15.6 dB min.	20 ± 1.0 dB	25.0 dB min.

Input Power	Impedance	Operating Temperature Range	Reel Qty
3 Watts max	50 Ω	-40 to +85°C	4000


Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.063 ± .004	0.032 ± .004	0.024 ± .004	.008 ± .004	0.008 ± .004/-0.006	.006 ± .004	0.012 ± .004	0.020 ± .002
mm	1.6 ± 0.1	0.80 ± 0.1	0.60 ± 0.1	0.20 ± 0.1	0.20+0.1/-0.15	0.15 ± 0.1	0.30 ± 0.1	0.50 ± 0.05



Terminal Configuration


1	IN	4	Termination
2	GND	5	GND
3	Coupled Out	6	Main Out



Mounting Considerations

Mount these devices with brown colored side facing up. * Line width should be designed to provide 50Ω impedance matching characteristics.

Units: mm

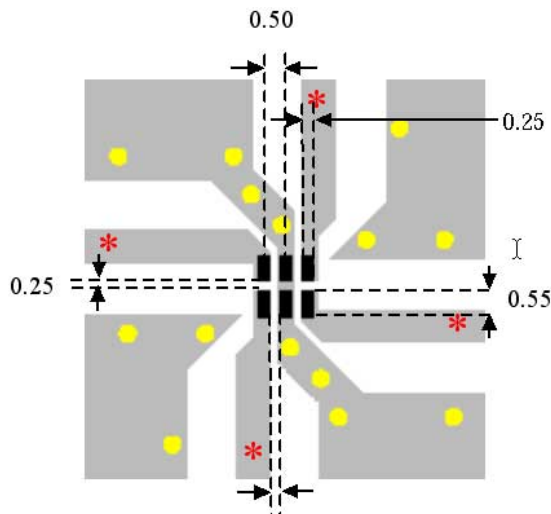

-  Solder Resist
-  Land
-  Through-hole (φ 0.3)
φ 0.3

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



“High Frequency Ceramic Solutions”

1810 MHz Directional Coupler

Detail Specification 01/22/2003

P/N 1810CP14A200

Page 2 of 2

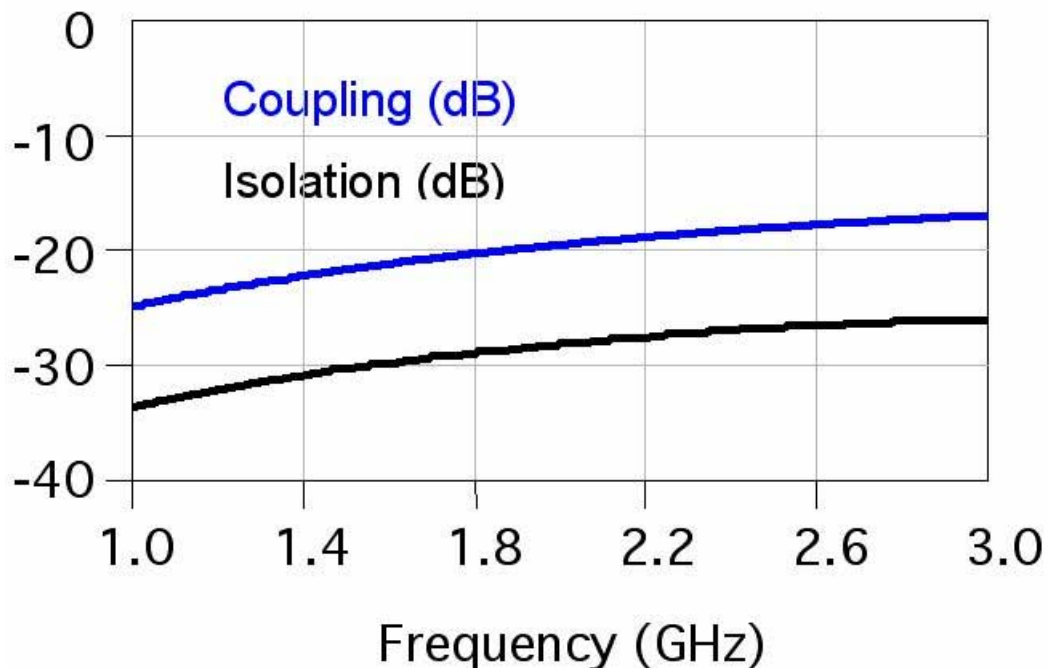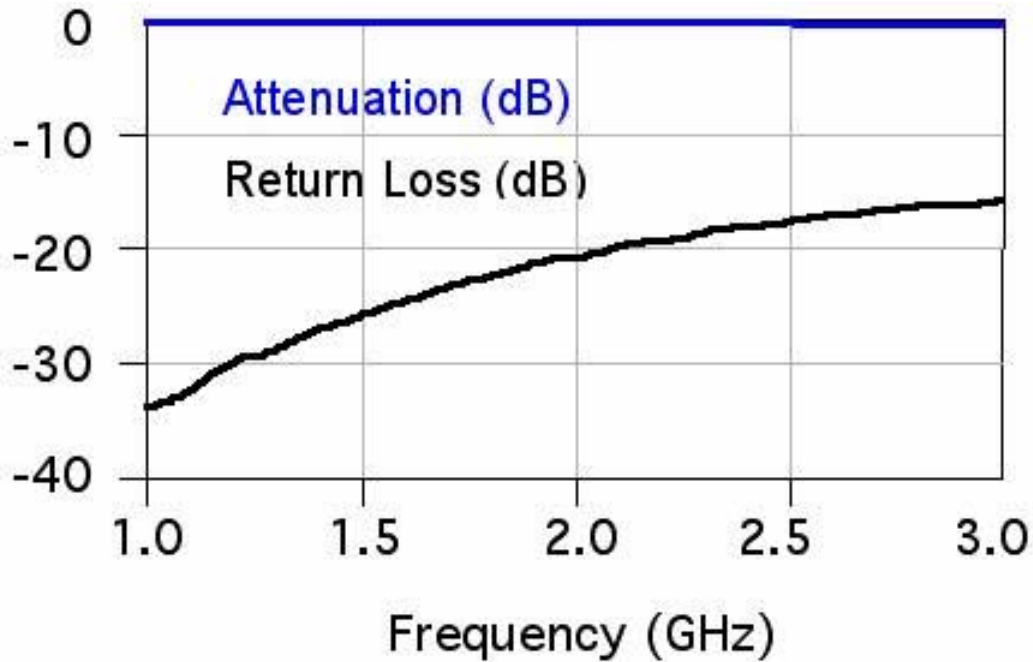

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com