

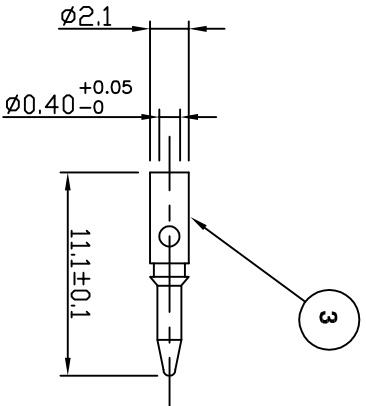
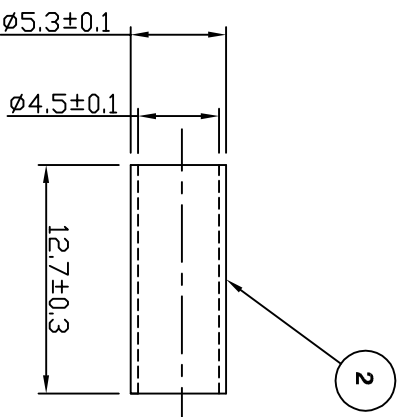


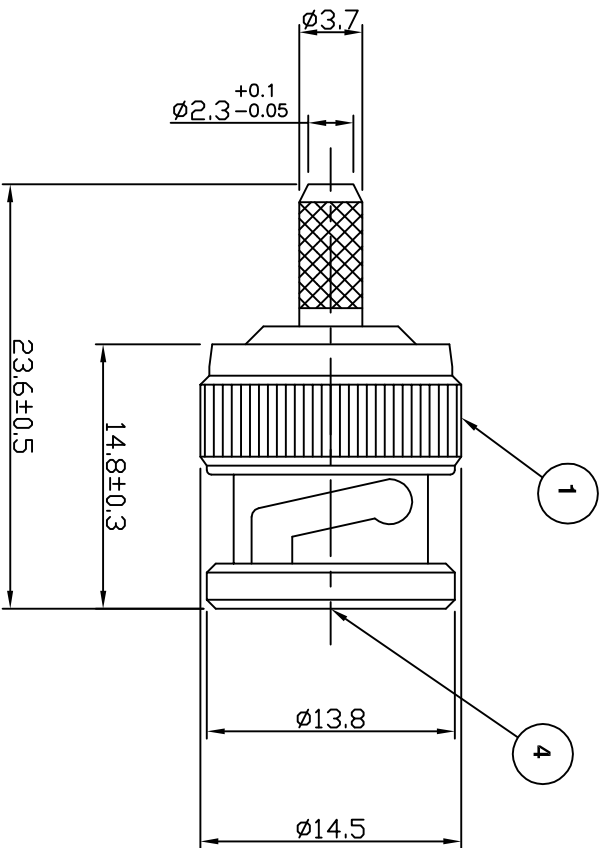

For stripping and assembly instructions see Drawing Number: VAIB1101



PART	DESCRIPTION	LB	4	26 Aug 09
1	Body	Brass, nickel plated 2.54µm		
2	Ferrule	Brass, nickel plated 2.54µm		
3	Contact	Brass, gold plated 0.076µm - 0.127µm		
4	Dielectric	PTFE		

Strip And Crimp Dims Added	LB	4	26 Aug 09
CAD Issue	SN	3	18 Jan 02
Pin hole size changed	AT	2	21 Jan 98
First Issue	AT	1	04 March 96

DESCRIPTION OF REVISION	APPVD	ISS	DATE

Electrical Characteristics

Nominal Impedance: 75 ohms
Frequency Range: DC to 1 GHz
VSWR: 1.35:1 maximum
Insertion Loss: 0.1 dB at 1 GHz
Operating Voltage (rms): 500 V maximum at sea level
Dielectric Withstand Voltage (rms): 1500 V maximum at sea level
Contact Resistance: 1.5 milliohms maximum
Insulation Resistance: 5000 megohms minimum

Mechanical Characteristics

Mating Cycles: 500 cycles minimum
Interface Dimensions: Conform to MIL-C-39012

Environmental Characteristics

Temperature Range: -65 °C to +165 °C



Connectivity Solutions
7-13 Russel Way,
Widford Industrial Estate,
Chelmsford, Essex,
CM1 3AA, UK.
Tel: +44 (0) 1245 359515
Fax: +44 (0) 1245 358938

SCALE: Not To Scale
DIMENSIONS: mm
TOLERANCES:
± 0.2mm unless
otherwise stated

DRAWN BY: S Nash
CHECKED BY: P Couzens
APPROVED BY: P Couzens
DATE: 18 Jan 02

TITLE:
BNC Crimp Plug for
RG179, RG187, BT3002,
TZC75024, and PSF1/7M

PART NUMBER:
VB10-2062
PAGE: 1 of 1

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com