




DIMENSIONS (mm)

Unspecified Tolerances +/- 0.127mm

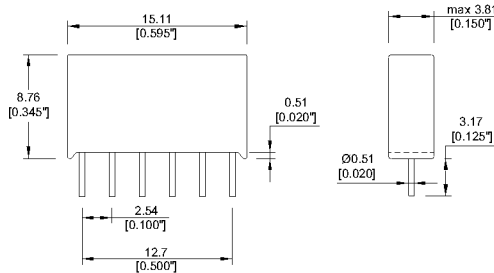

LAYOUT 78D

Pitch 2.54mm [0.100"] / Top View



MARKING

Top View

 MEDER ww/yy
 1 MS05-2A87-78D

Coil Data at 20 °C	Conditions	Min	Typ	Max	Unit
Coil resistance		338	375	413	Ohm
Coil voltage			5		VDC
Rated power			67		mW
Pull-In voltage				3,75	VDC
Drop-Out voltage		0,5			VDC

Contact data 87	Conditions	Min	Typ	Max	Unit
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	W
Switching voltage	DC or Peak AC			200	V
Switching current	DC or Peak AC			0,5	A
Carry current	DC or Peak AC			1	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Contact resistance dynamic	Maximum value 1,5 ms after excitation Start Value			200	mOhm
Insulation resistance	RH <45 %, 100V - to all points	1			TOhm
Breakdown voltage	according to IEC 255-5	230			VDC
Operate time incl. bounce	measured with nominal voltage			0,5	ms
Release time	measured with no diode suppression			0,1	ms
Capacitance	@ 10 kHz		0,2		pF

Special Product Data	Conditions	Min	Typ	Max	Unit
Isolation voltage Coil/Contact	according to IEC 255-5	1,5			kV DC
Connection pins					FeNi-alloy tin plated
Magnetic Shielding					Internal mu-metal shield
Remarks					

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	g
Vibration	from 10 - 2000 Hz			20	g
Operating temperature		-20		70	°C
Storage temperature		-20		95	°C
Soldering temperature	max. 5 sec			260	°C
Washability					fully sealed

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com