

SPECIFICATIONS

Material: HEXSEALS: Silicone Rubber Conforms to A-A-59588 Class III, Gr. 50 (unless otherwise specified)


Temperature Range: HEXSEALS: -94°F to +400°F

Pressure Range: Exceeds 15 psi internal and 1500 psi external (N5032B: 10 psi)

Operation Life: 500,000 actuations (minimum)

Shelf Life: Excess of 25 years.

Resistant to: Salt spray, sunlight, ozone, weather, fungus, and most acids and lubrication oils.

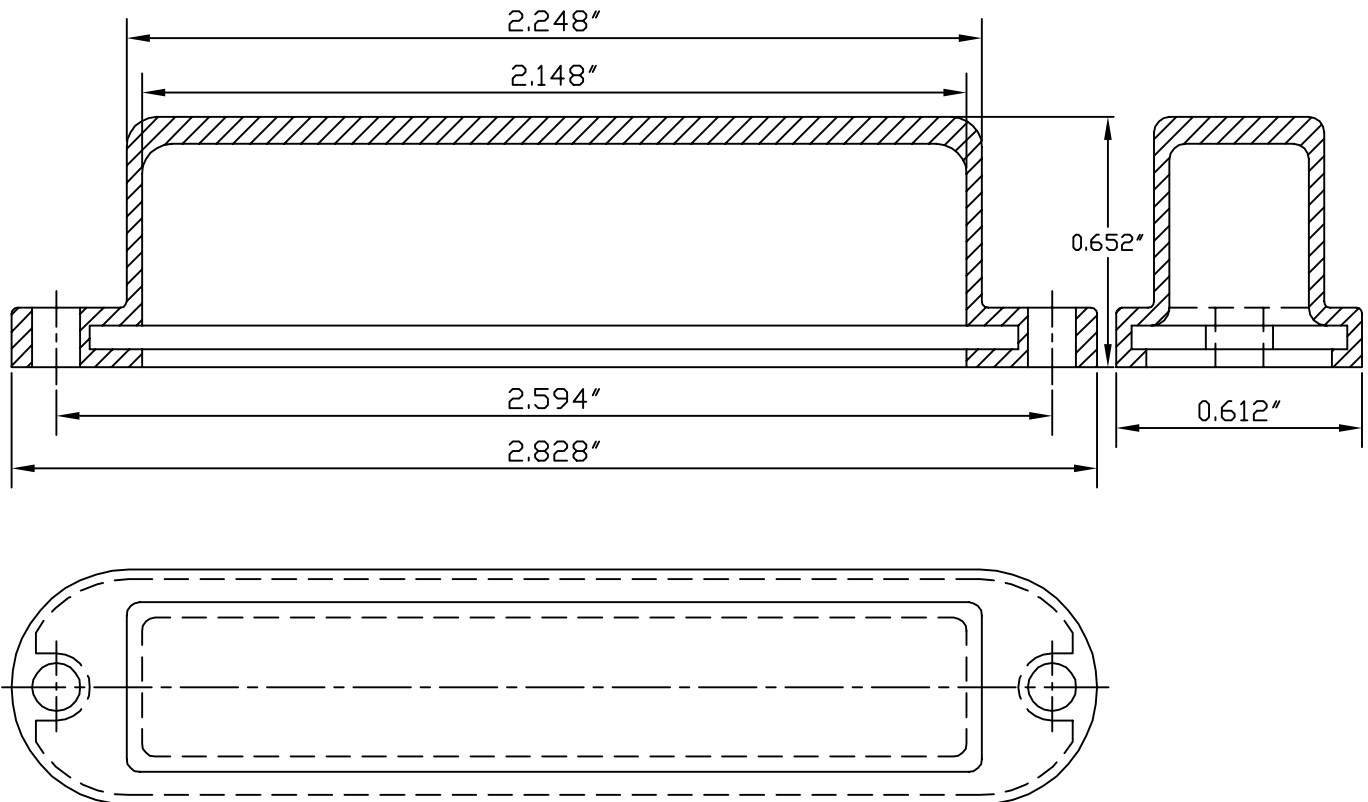

B	MAT'L CHANGED and REDRAWN			S. GOK	11.24.09		
A	CAD COMPUTER GENERATED				09.23.02		
REV.	DESCRIPTION				DATE		
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.		TITLE:	BOOT, HANDSET SWITCH H33/PT (1211/13)		ENG.	S. GOK	11.24.09
					DWN.	CARBONE	12.09.69
					CHKD.	J. CELLA	11.24.09
MAT'L: Silicone Rubber A-A-59588 ClassIII, Gr.50		APM-HEXSEAL CORPORATION	SCALE	DWG. NO.	1211/13		
FINISH: GRAY			2 : 1				

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.

THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com