

Data Sheet




Description

The ACPL-217 is a DC-input single channel half-pitch phototransistor optocoupler which contains a light emitting diode optically coupled to a phototransistor. It is packaged in a 4-pin SO package.

The input-output isolation voltage is rated at 3000 Vrms. Response time, t_r , is $2\mu s$ typically, while minimum CTR is 50% at input current of 5 mA

ACPL-217 pin layout



- Pin 1 Anode
- Pin 2 Cathode
- Pin 3 Emitter
- Pin 4 Collector

Features

- Current transfer ratio (CTR: 50% (min) at $I_F = 5\text{mA}$, $V_{CC} = 5\text{V}$)
- High input-output isolation voltage ($V_{ISO} = 3,000V_{RMS}$)
- Non-saturated Response time ($t_r: 2\mu s$ (typ) at $V_{CC} = 10\text{V}$, $I_C = 2\text{mA}$, $R_L = 100\Omega$)
- SO package
- CMR $10\text{kV}/\mu s$ (typical)
- Safety and regulatory approvals
 - UL
 - CSA
 - IEC/EN/DIN EN 60747-5-2
- Options available:
 - CTR Ranks 0, A, B, C & D

Applications

- I/O Interface for Programmable controllers, computers.
- Sequence controllers
- System appliances, measuring instruments
- Signal transmission between circuits of different potentials and impedances.

Ordering Information

ACPL-2x7-xxxx is pending UL Recognition with 3000 Vrms for 1 minute per UL1577 and is pending approval under CSA Component Acceptance Notice #5, File CA 88324.

RoHS Compliant Option											
Part number	Rank '0'	Rank 'A'	Rank 'B'	Rank 'C'	Rank 'D'	Package	Surface Mount	Tape & Reel	IC Orientation	IEC/EN/DIN EN 60747-5-2	Quantity
	50% <CTR< 600%	80% <CTR< <160%	130% <CTR< 260%	200% <CTR< 400%	300% <CTR< 600%						
	$I_F=5mA$, $V_{CE}=5V$	$I_F=5mA$, $V_{CE}=5V$	$I_F=5mA$, $V_{CE}=5V$	$I_F=5mA$, $V_{CE}=5V$	$I_F=5mA$, $V_{CE}=5V$						
ACPL-217	-500E	-50AE	-50BE	-50CE	-50DE	SO-4	x	x	0°		3000 pcs per reel
	-560E	-56AE	-56BE	-56CE	-56DE	SO-4	x	x	0°	X	3000 pcs per reel
	-700E	-70AE	-70BE	-70CE	-70DE	SO-4	x	X	180°		3000 pcs per reel
	-760E	-76AE	-76BE	-76CE	-76DE	SO-4	x	x	180°	X	3000 pcs per reel

To order, choose a part number from the part number column and combine with the desired option from the option column to form an order entry.

Example 1:


ACPL-217-560E to order product of SO-4 Surface Mount package in Tape & Reel packaging with IEC/EN/DIN EN 60767-5-2 Safety Approval, 50%<CTR<600% and RoHS compliant.

Example 2


ACPL-217-50BE to order product of SO-4 Surface Mount package in Tape & Reel packaging with 130%<CTR<260% and RoHS compliant.

Option datasheets are available. Contact your Avago sales representative or authorized distributor for information.

Package Outline Drawings

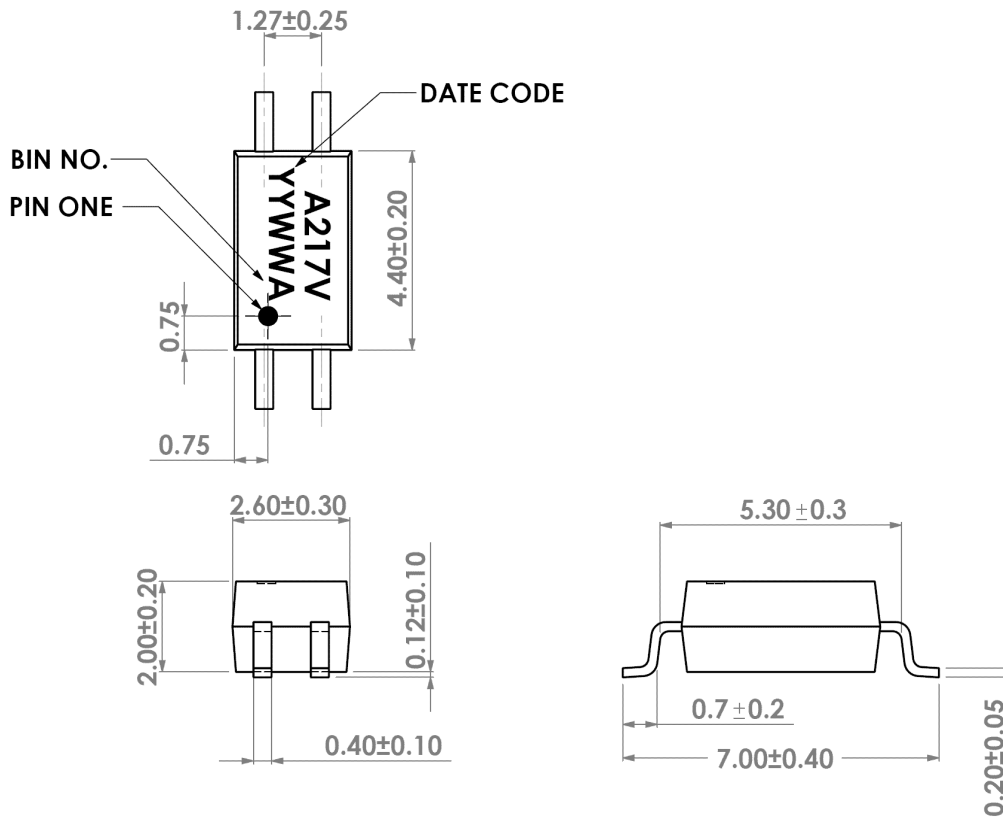

Solder Reflow Temperature Profile

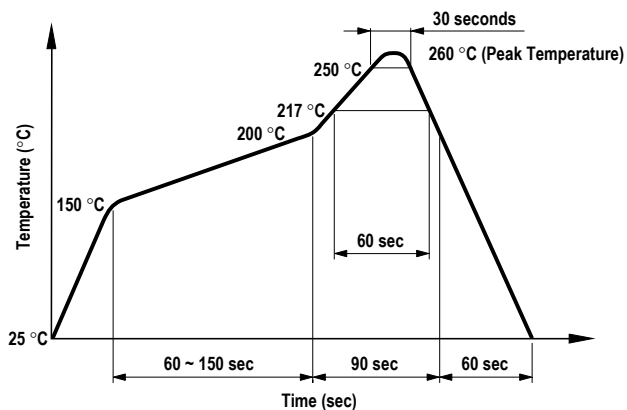

1. One-time soldering reflow is recommended within the condition of temperature and time profile shown at right.
2. When using another soldering method such as infrared ray lamp, the temperature may rise partially in the mold of the device. Keep the temperature on the package of the device within the condition of (1) above.

Note: Non halide flux should be used.

Absolute Maximum Ratings

Parameter	Symbol	ACPL-217	Units	Note
Storage Temperature	T_S	-55~125	°C	
Operating Temperature	T_A	-55~110	°C	
Average Forward Current	$I_{F(AVG)}$	50	mA	
Pulse Forward Current	I_{FSM}	1	A	
Reverse Voltage	V_R	6	V	
LED Power Dissipation	P_I	65	mW	
Collector Current	I_C	50	mA	
Collector-Emitter Voltage	V_{CEO}	80	V	
Emitter-Collector Voltage	V_{ECO}	7	V	
Isolation Voltage (AC for 1min, R.H. 40~60%)	V_{ISO}	3000	V_{RMS}	1min
Collector Power Dissipation	P_C	150	mW	
Total Power Dissipation	P_{TOT}	200	mW	
Lead Solder Temperature		260°C for 10 sec., 1.6 mm below seating plane		

Electrical Specifications (DC)

Over recommended ambient temperature at 25°C unless otherwise specified.

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions	Note
Forward Voltage	V_F	-	1.2	1.4	V	$I_F = 20\text{mA}$	Fig.6
Reverse Current	I_R	-	-	10	μA	$V_R = 5\text{V}$	
Terminal Capacitance	C_t	-	30	-	pF	$V = 0, f = 1\text{MHz}$	
Collector Dark Current	I_{CEO}	-	-	100	nA	$V_{CE} = 48\text{V}, I_F = 0\text{mA}$	Fig.12
Collector-Emitter Breakdown Voltage	BV_{CEO}	80	-	-	V	$I_C = 0.5\text{mA}, I_F = 0\text{mA}$	
Emitter-Collector Breakdown Voltage	BV_{ECO}	7	-	-	V	$I_E = 100\mu\text{A}, I_F = 0\text{mA}$	
Current Transfer Ratio	CTR	50	-	600	%	$I_F = 5\text{mA}, V_{CE} = 5\text{V}$	$CTR = (I_C/I_F) * 100\%$
Saturated CTR	CTR(sat)	-	100	-	%	$I_F = 1\text{mA}, V_{CE} = 0.4\text{V}$	
Collector-Emitter Saturation Voltage	$V_{CE}(\text{sat})$	-	-	0.4	V	$I_F = 8\text{mA}, I_C = 2.4\text{mA}$	Fig.14
Isolation Resistance	R_{ISO}	5×10^{10}	1×10^{11}	-	Ω	DC500V, R.H. 40~60%	
Floating Capacitance	C_F	-	0.6	1	pF	$V = 0, f = 1\text{MHz}$	
Cut-off Frequency (-3dB)	F_C	-	80	-	kHz	$V_{CC} = 5\text{V}, I_C = 2\text{mA}, R_L = 100\Omega$	Fig. 2,19
Response Time (Rise)	t_r	-	2	-	μs	$V_{CC} = 10\text{V}, I_C = 2\text{mA}, R_L = 100\Omega$	Fig. 1
Response Time (Fall)	t_f	-	3	-	μs		
Turn-on Time	t_{on}	-	3	-	μs		
Turn-off Time	t_{off}	-	3	-	μs		
Turn-ON Time	t_{ON}	-	2	-	μs	$V_{CC} = 5\text{V}, I_F = 16\text{mA}, R_L = 1.9\text{k}\Omega$	Fig. 1, 17
Storage Time	T_S	-	25	-	μs		
Turn-OFF Time	t_{OFF}	-	40	-	μs		
Common Mode Rejection Voltage	CMR	-	10	-	kV/ μs	$T_a = 25^\circ\text{C}, R_L = 470\Omega, V_{CM} = 1.5\text{kV}(\text{peak}), I_F = 0\text{mA}, V_{CC} = 9\text{V}, V_{np} = 100\text{mV}$	Fig.20

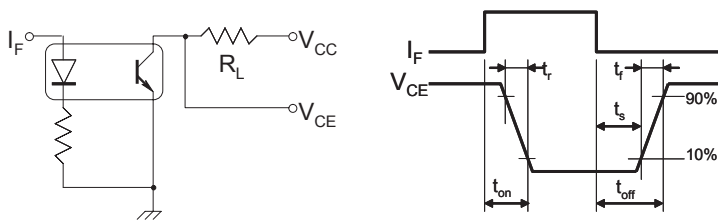


Figure 1. Switching Time Test Circuit

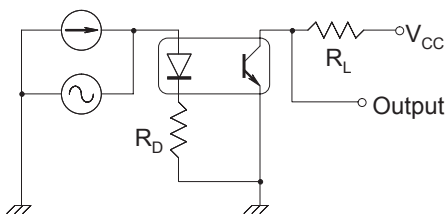


Figure 2. Frequency Response Test Circuit

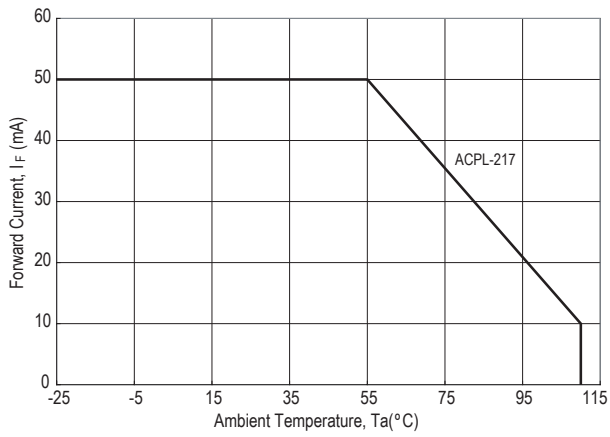


Figure 3. Forward Current vs. Ambient Temperature.

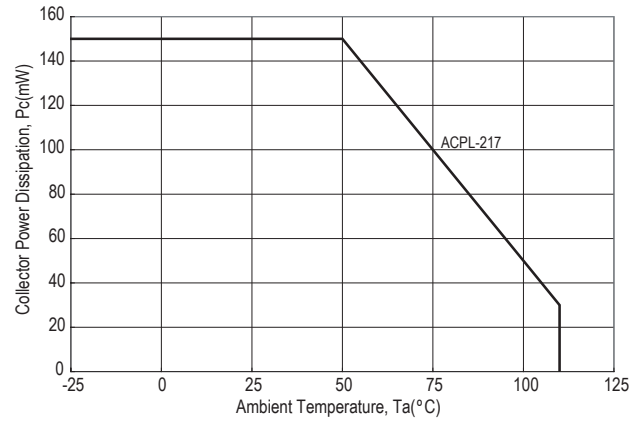


Figure 4. Collector Power Dissipation vs. Ambient Temperature

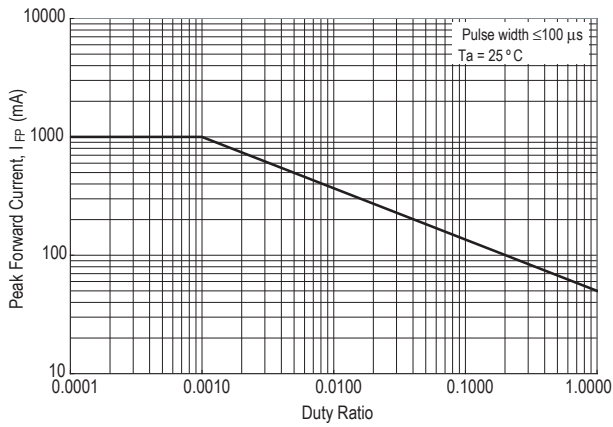


Figure 5. Pulse Forward Current vs. Duty Cycle Ratio

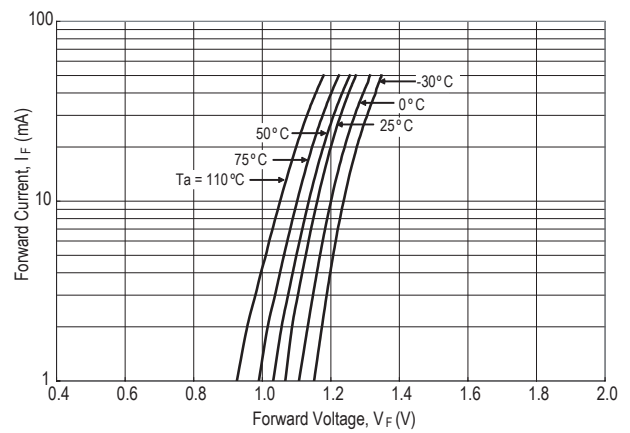


Figure 6. Forward Current vs. Forward Voltage

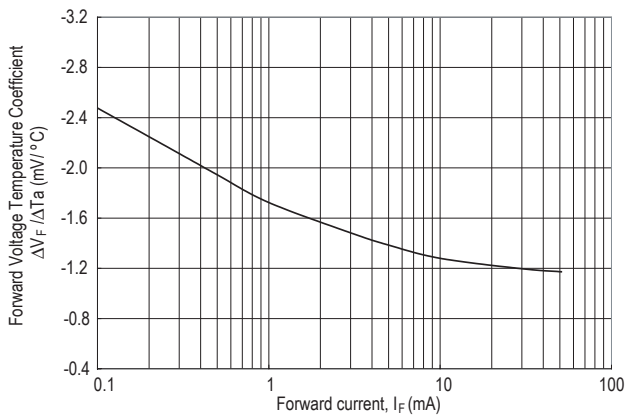


Figure 7. Forward Voltage Temperature Coefficient vs. Forward Current

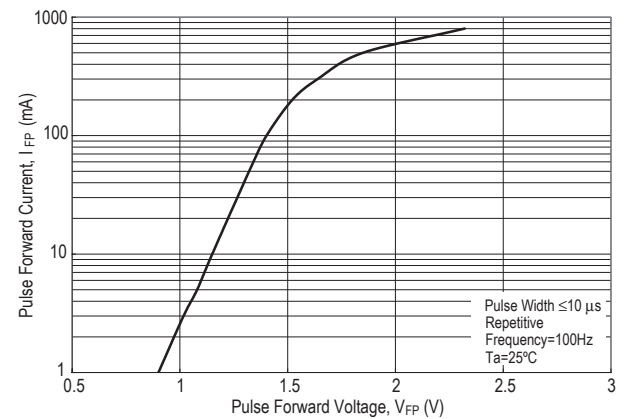


Figure 8. Pulse Forward Current vs. Pulse Forward Voltage

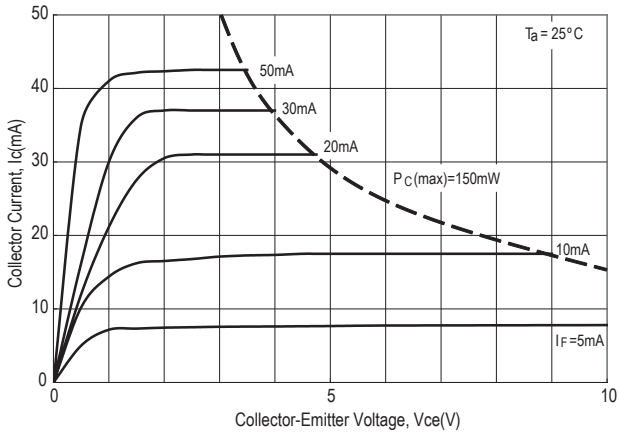


Figure 9. Collector Current vs. Collector-Emitter Voltage

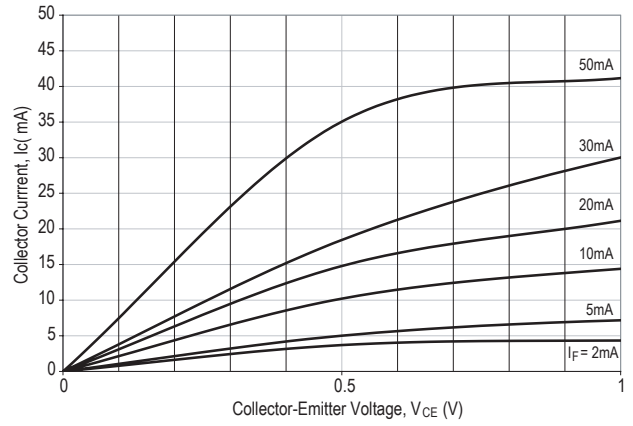


Figure 10. Collector Current vs. Small Collector-Emitter Voltage

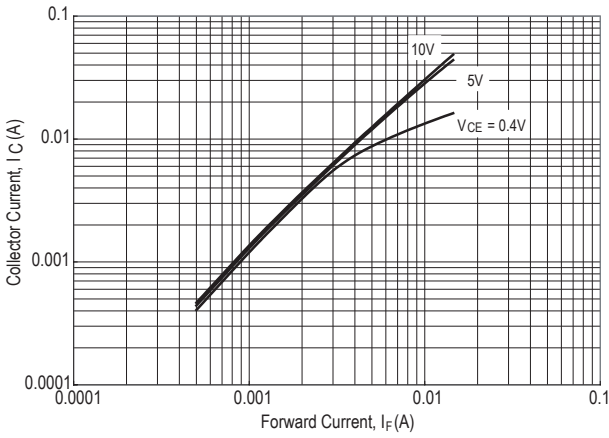


Figure 11. Collector Current vs. Forward Current

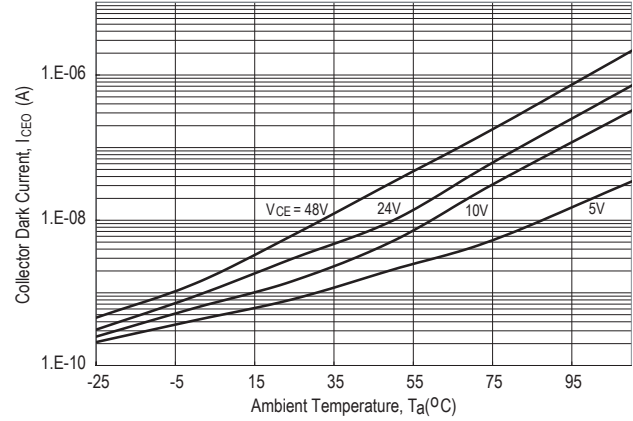


Figure 12. Collector Dark Current vs. Ambient Temperature

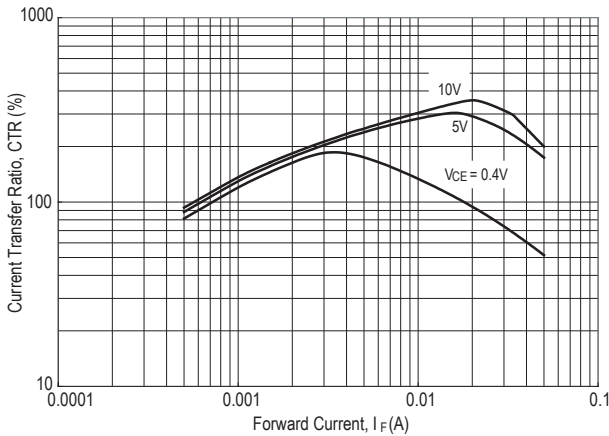


Figure 13. Current Transfer Ratio vs. Forward Current

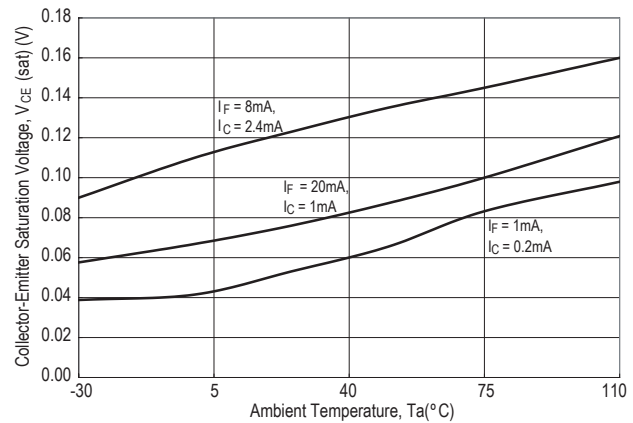


Figure 14. Collector-Emitter Saturation Voltage vs. Ambient Temperature

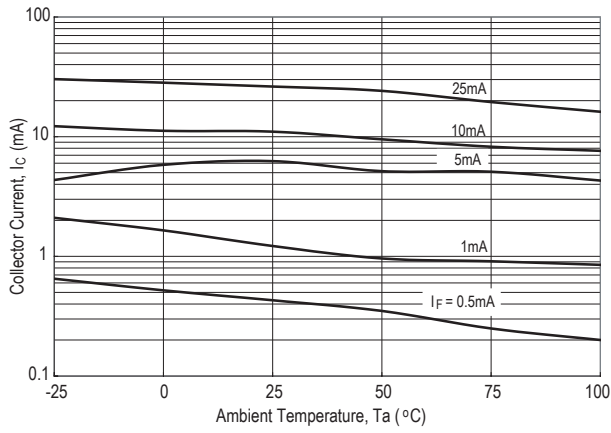


Figure 15. Collector Current vs. Ambient Temperature

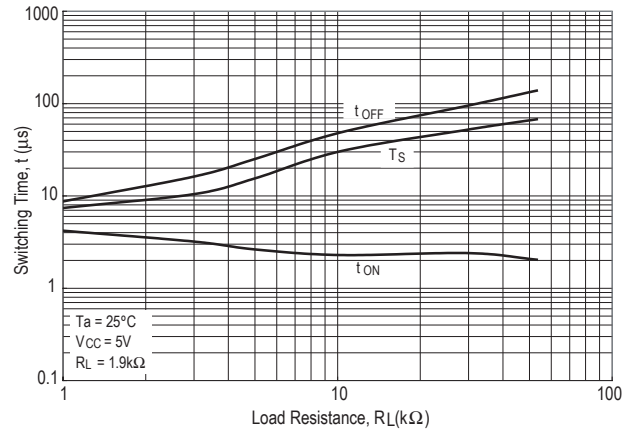


Figure 16. Switching Time vs. Load Resistance

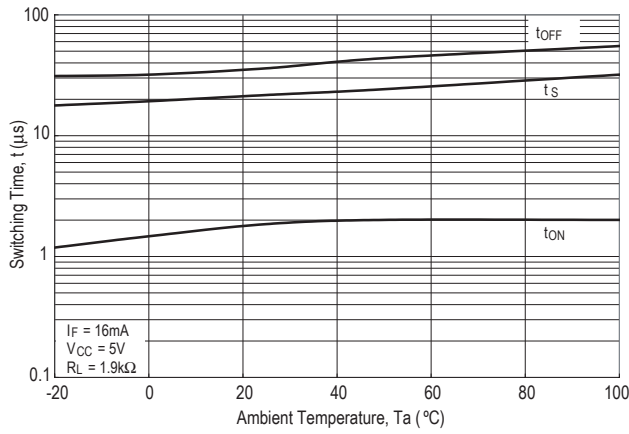


Figure 17. Switching Time vs. Ambient Temperature

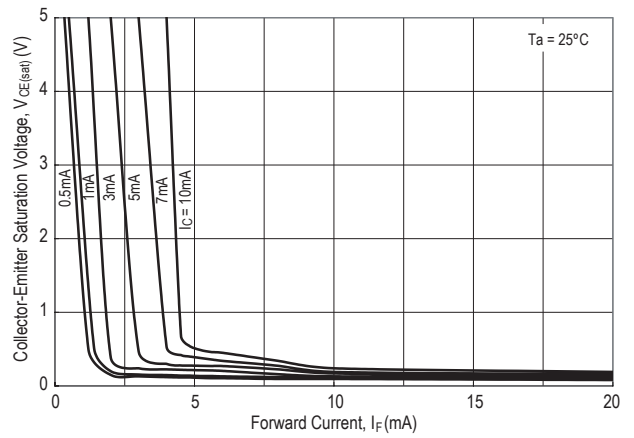


Figure 18. Collector-Emitter Saturation Voltage vs. Forward Current

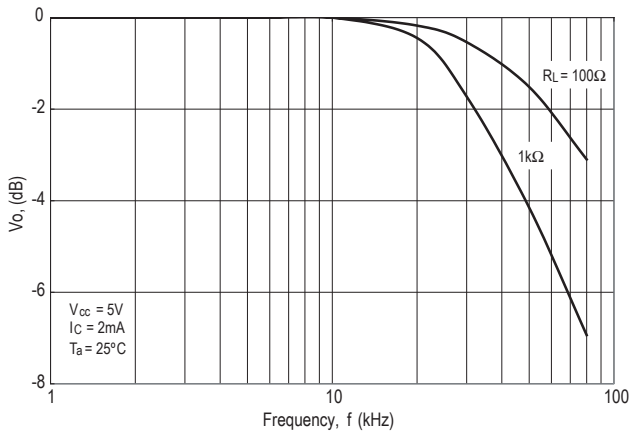


Figure 19. Frequency Response

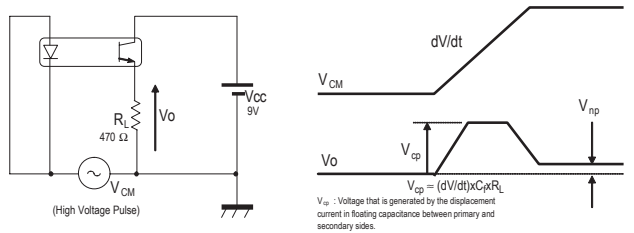


Figure 20. CMR Test Circuit

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies Limited in the United States and other countries. Data subject to change. Copyright © 2008 Avago Technologies Limited. All rights reserved. AV02-0470EN - February 26, 2008

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com