




File: E209153



ISO9001:2008 Certified

Mechanical Specifications (mm)

D:	11.5	± Max
T:	5.1	± Max
Lead Diameter	1.0	± Nom
S:	7.8	± Nom
L:	38.0	± Nom
Coating Lead Run Down (straight Leads)	5.0	± Max
B:	6.35	± Nom
C:	3.42	± Nom

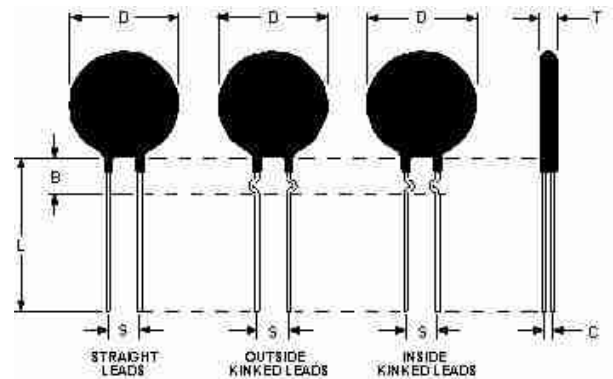

Electrical Specifications

Resistance:	17.5 Ω	± 25 %
Max Steady State Current upto 65°C:	4.00	A
Max Rec. Energy Rating:	30	J
Actual Failure Instantaneous Energy:	69	J
Resistance @ 100% Max Current:	0.16	Ω
Resistance @ 50% Max Current:	0.34	Ω
Body Temperature at 100% Max Current:	152.00	°C
Dissipation Constant:	12.7	mW/°C
Thermal Time Constant:	47	Sec.
Material Type (for Beta and Curve):	G	

SL12 17004

Date: 05/04/2012	Drawn by: Erin Landis
Ametherm, Inc. 3111 N. Deer Run Road Carson City, Nevada USA 89701 www.ametherm.com	Approved By: Mehdi Samii
	Revision: A

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com