

## Micro-Power Voltage Detectors

### General Description

The RT9819 is a micro-power voltage detector supervising the power supply voltage level for microprocessors ( $\mu$ P) or digital systems. It provides internally fixed threshold levels with 0.1V per step ranging from 1.2V to 5V, which covers most digital applications. It features low supply current of 3 $\mu$ A. The RT9819 performs supervisory function by sending out a reset signal whenever the  $V_{DD}$  voltage falls below a preset threshold level. This reset signal will last the whole period before  $V_{DD}$  recovering. Once  $V_{DD}$  recovered upcrossing the threshold level, the reset signal will be released after a certain delay time. The RT9819 is provided in SC-70-3, SC-82, SOT-23-3 and WDFN-6L 1.6x1.6 packages.

### Ordering Information

|        |                                         |   |   |   |
|--------|-----------------------------------------|---|---|---|
| RT9819 | □                                       | □ | □ | □ |
|        | Package Type                            |   |   |   |
|        | U3 : SC-70-3                            |   |   |   |
|        | V : SOT-23-3                            |   |   |   |
|        | VL : SOT-23-3 (L-Type)                  |   |   |   |
|        | Y : SC-82                               |   |   |   |
|        | YR : SC-82 (R-Type)                     |   |   |   |
|        | QW : WDFN-6L 1.6x1.6 (W-Type)           |   |   |   |
|        | Lead Plating System                     |   |   |   |
|        | P : Pb Free                             |   |   |   |
|        | G : Green (Halogen Free and Pb Free)    |   |   |   |
|        | Threshold Voltage                       |   |   |   |
|        | 12 : 1.2V                               |   |   |   |
|        | 13 : 1.3V                               |   |   |   |
|        | ...                                     |   |   |   |
|        | 49 : 4.9V                               |   |   |   |
|        | 50 : 5.0V                               |   |   |   |
|        | Reset Active Timeout Period             |   |   |   |
|        | A = 0ms ( $\overline{\text{RESET}}$ )   |   |   |   |
|        | B = 55ms ( $\overline{\text{RESET}}$ )  |   |   |   |
|        | C = 220ms ( $\overline{\text{RESET}}$ ) |   |   |   |
|        | D = 450ms ( $\overline{\text{RESET}}$ ) |   |   |   |
|        | E = 0ms (RESET)                         |   |   |   |
|        | F = 55ms (RESET)                        |   |   |   |
|        | G = 220ms (RESET)                       |   |   |   |
|        | H = 450ms (RESET)                       |   |   |   |

Note :

Richtek products are :

- ▶ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶ Suitable for use in SnPb or Pb-free soldering processes.


### Features

- Internally Fixed Threshold 1.2V to 5V in 0.1V Step
- High Accuracy  $\pm 1.5\%$
- Low Supply Current 3 $\mu$ A
- No External Components Required
- Quick Reset within 20 $\mu$ s
- Built-in Recovery Delay Include 0ms, 55ms, 220ms, 450ms Options
- Low Functional Supply Voltage 0.9V
- CMOS Push-Pull Output
- Small SC-70-3, SC-82, SOT-23-3 and WDFN-6L 1.6x1.6 Packages
- RoHS Compliant and Halogen Free

### Applications

- Computers
- Controllers
- Intelligent Instruments
- Critical  $\mu$ P and  $\mu$ C Power Monitoring
- Portable/Battery-Powered Equipment

### Typical Application Circuit

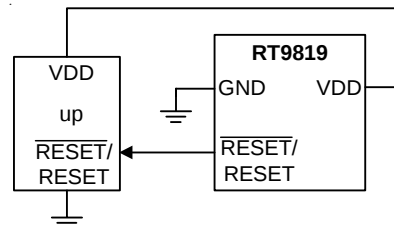


### Marking Information


For marking information, contact our sales representative directly or through a Richtek distributor located in your area.

## Pin Configurations


(TOP VIEW)




SC-70-3




SOT-23-3




SC-82



SOT-23-3 (L-Type)



SC-82 (R-Type)




WDFN-6L 1.6x1.6

## Functional Pin Description

| Pin Name                  | Pin Function                       |
|---------------------------|------------------------------------|
| GND                       | Ground.                            |
| $\overline{\text{RESET}}$ | Active Low Push-Pull Reset Output. |
| RESET                     | Active High Push-Pull Reset Output |
| VDD                       | Power Input.                       |
| NC                        | No Internal Connection.            |

## Function Block Diagram

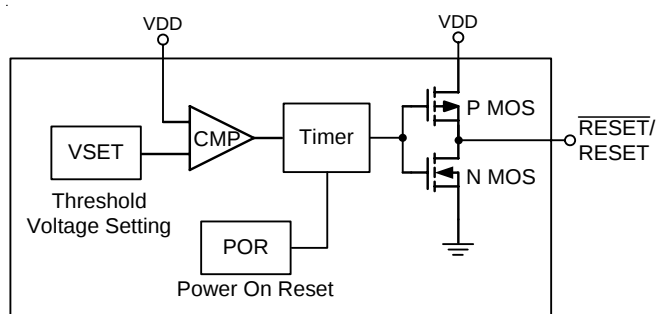

## Absolute Maximum Ratings (Note 1)

- Terminal Voltage (with Respect to GND)
  - $V_{DD}$  ----- -0.3V to 6V
- All Other Inputs ----- -0.3V to ( $V_{DD} + 0.3V$ )
- Input Current,  $I_{VDD}$  ----- 20mA
- Power Dissipation, PD @  $T_A = 25^\circ C$ 
  - SC-70-3/SC-82 ----- 0.25W
  - SOT-23-3 ----- 0.4W
  - WDFN-6L 1.6x1.6 ----- 1.7W
- Package Thermal Resistance (Note 2)
  - SC-70-3/SC-82,  $\theta_{JA}$  -----  $400^\circ C/W$
  - SOT-23-3,  $\theta_{JA}$  -----  $250^\circ C/W$
  - WDFN-6L 1.6x1.6,  $\theta_{JA}$  -----  $58.5^\circ C/W$
- Lead Temperature (Soldering, 10sec.) -----  $260^\circ C$
- Storage Temperature Range -----  $-65^\circ C$  to  $125^\circ C$
- ESD Susceptibility (Note 3)
  - HBM (Human Body Model) ----- 2kV
  - MM (Machine Model) ----- 200V

## Recommended Operating Conditions (Note 4)

- Junction Temperature Range -----  $-40^\circ C$  to  $125^\circ C$
- Ambient Temperature Range -----  $-40^\circ C$  to  $85^\circ C$

## Electrical Characteristics

( $V_{DD} = 3V$ ,  $T_A = 25^\circ C$ , unless otherwise specified)

| Parameter                              |           | Symbol          | Test Conditions                  | Min  | Typ           | Max | Unit    |
|----------------------------------------|-----------|-----------------|----------------------------------|------|---------------|-----|---------|
| Operating $V_{DD}$ ( $V_{OUT}$ ) Range |           | $V_{DD}$        | RT9819A/B/C/D                    | 0.9  | --            | 6   | V       |
|                                        |           |                 | RT9819E/F/G/H                    | 1.1  | --            | 6   |         |
| Supply Current                         |           | $I_{DD}$        | $V_{TH} = 3V$ , $V_{DD} = 4.5V$  | --   | 3             | 8   | $\mu A$ |
| Reset Threshold                        |           | $V_{TH}$        |                                  | --   | 1.2 to 5      | --  | V       |
| Threshold Voltage Accuracy             |           | $\Delta V_{TH}$ |                                  | -1.5 | --            | 1.5 | %       |
| Threshold Voltage Hysteresis           |           | $V_{HYS}$       |                                  | --   | $0.01 V_{TH}$ | --  | V       |
| $V_{DD}$ Drop to Reset Delay           |           | $t_{RD}$        | Drop = $V_{TH} - 125mV$          | --   | 20            | --  | $\mu s$ |
| Reset Active Time Out Period           | RT9819A/E | $t_{RP}$        | $V_{DD} \geq 1.02 \times V_{TH}$ | --   | 0             | --  | ms      |
|                                        | RT9819B/F |                 |                                  | 35   | 55            | 75  | ms      |
|                                        | RT9819C/G |                 |                                  | 143  | 220           | 297 | ms      |
|                                        | RT9819D/H |                 |                                  | 292  | 450           | 608 | ms      |

| Parameter                 | Symbol          | Test Conditions                                                       | Min            | Typ | Max | Unit |
|---------------------------|-----------------|-----------------------------------------------------------------------|----------------|-----|-----|------|
| RESET Output Voltage Low  | V <sub>OL</sub> | $V_{DD} < V_{TH(MIN)}$ , $I_{SINK} = 3.5mA$ , $V_{TH} \geq 3V$        | --             | --  | 0.4 | V    |
|                           |                 | $V_{DD} < V_{TH(MIN)}$ , $I_{SINK} = 1.2mA$ , $V_{TH} \geq 1.8V$      | --             | --  | 0.3 |      |
|                           |                 | $V_{TH(MIN)} > V_{DD} > 1V$ , $I_{SINK} = 0.5mA$                      | --             | --  | 0.3 |      |
| RESET Output Voltage High | V <sub>OH</sub> | $V_{DD} > V_{TH(MAX)}$ , $I_{SOURCE} = 800\mu A$ , $V_{TH} \geq 3V$   | $V_{DD} - 1.5$ | --  | --  | V    |
|                           |                 | $V_{DD} > V_{TH(MAX)}$ , $I_{SOURCE} = 500\mu A$ , $V_{TH} \geq 1.8V$ | $0.8 V_{DD}$   | --  | --  |      |
|                           |                 | $V_{DD} > V_{TH(MAX)}$ , $I_{SOURCE} = 200\mu A$ , $V_{TH} \geq 1.1V$ | $0.8 V_{DD}$   | --  | --  |      |
| RESET Output Voltage Low  | V <sub>OL</sub> | $V_{DD} > V_{TH(MAX)}$ , $I_{SINK} = 3.5mA$ , $V_{TH} \geq 3V$        | --             | --  | 0.4 | V    |
|                           |                 | $V_{DD} > V_{TH(MAX)}$ , $I_{SINK} = 1.2mA$ , $V_{TH} \geq 1.8V$      | --             | --  | 0.3 |      |
|                           |                 | $V_{DD} > V_{TH(MAX)}$ , $I_{SINK} = 0.5mA$ , $V_{TH} \geq 1.2V$      | --             | --  | 0.3 |      |
| RESET Output Voltage High | V <sub>OH</sub> | $1.1V < V_{DD} < V_{TH(MIN)}$ , $I_{SOURCE} = 200\mu A$               | $0.8 V_{DD}$   | --  | --  | V    |
|                           |                 | $1.8V < V_{DD} < V_{TH(MIN)}$ , $I_{SOURCE} = 500\mu A$               | $0.8 V_{DD}$   | --  | --  |      |
|                           |                 | $3V < V_{DD} < V_{TH(MIN)}$ , $I_{SOURCE} = 800\mu A$                 | $V_{DD} - 1.5$ | --  | --  |      |







**Note 1.** Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.







**Note 2.**  $\theta_{JA}$  is measured at  $T_A = 25^\circ C$  on a single-layer and four-layer test board of JEDEC 51.

**Note 3.** Devices are ESD sensitive. Handling precaution is recommended.


**Note 4.** The device is not guaranteed to function outside its operating conditions.

# Typical Operating Characteristics

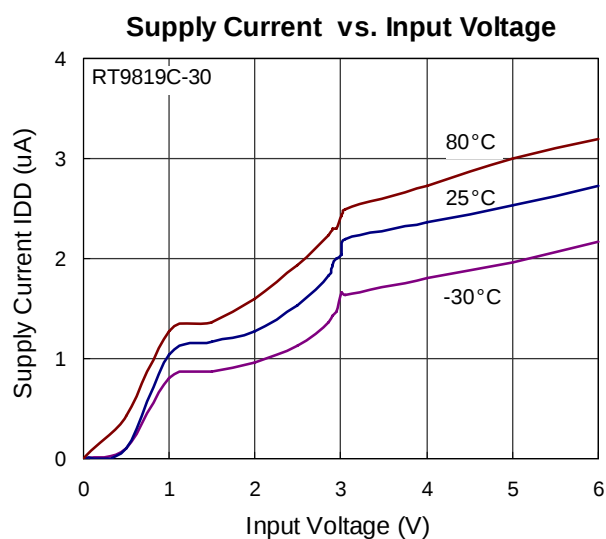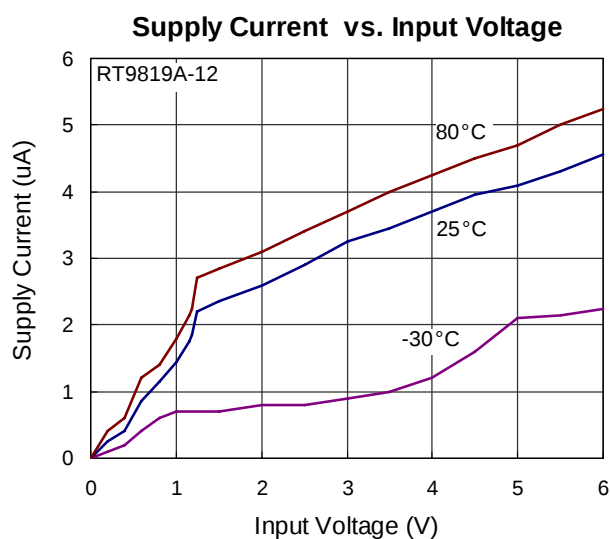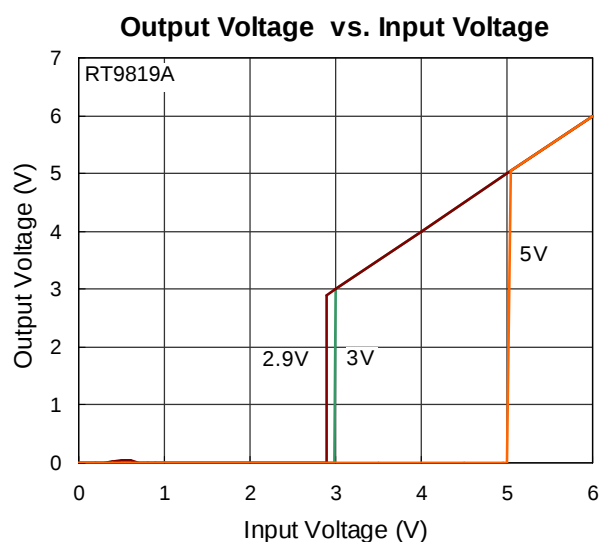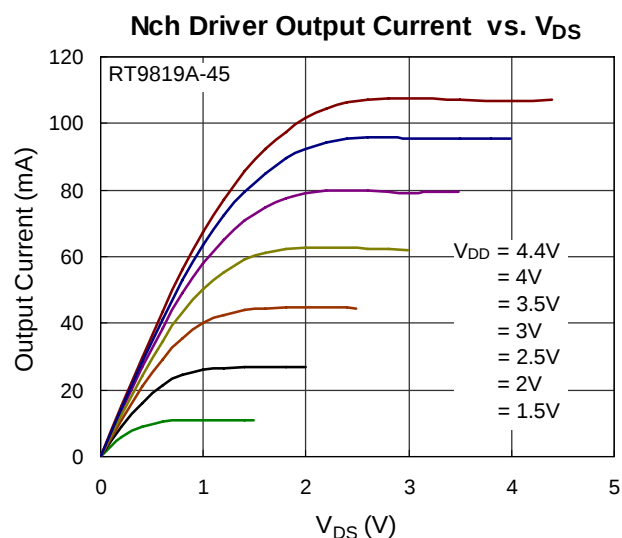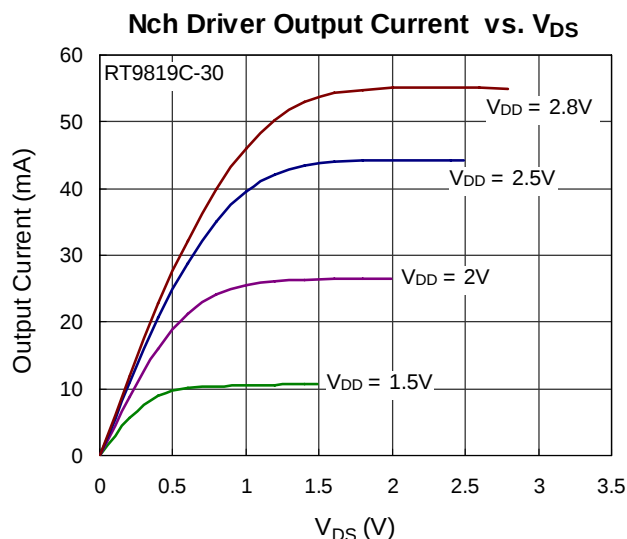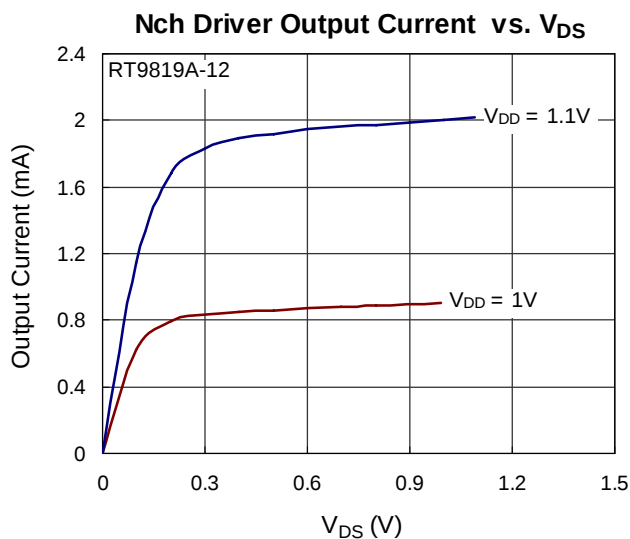


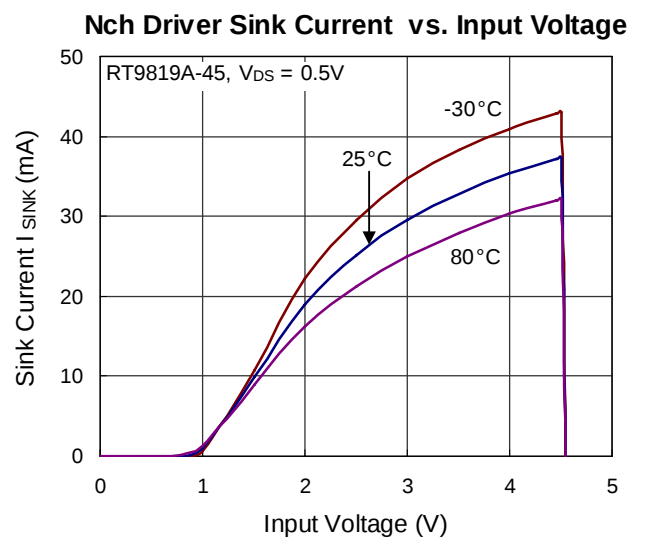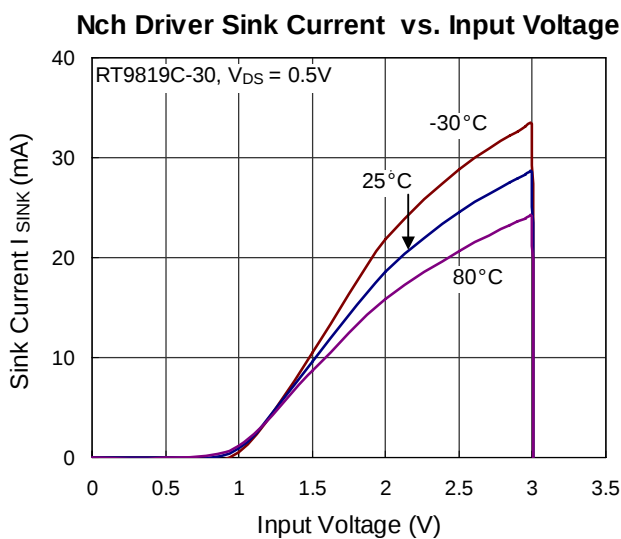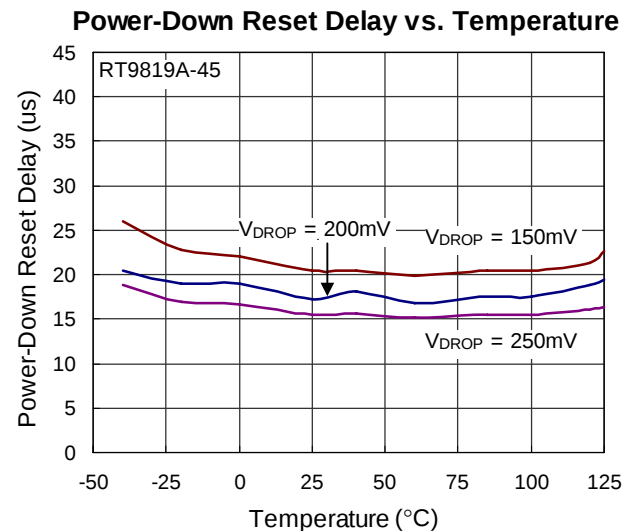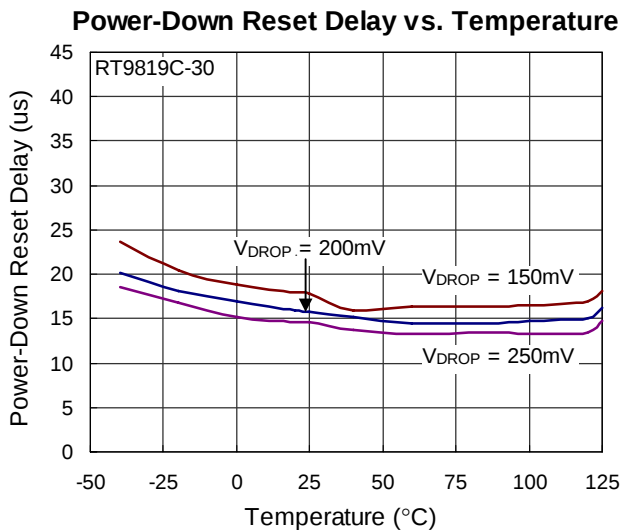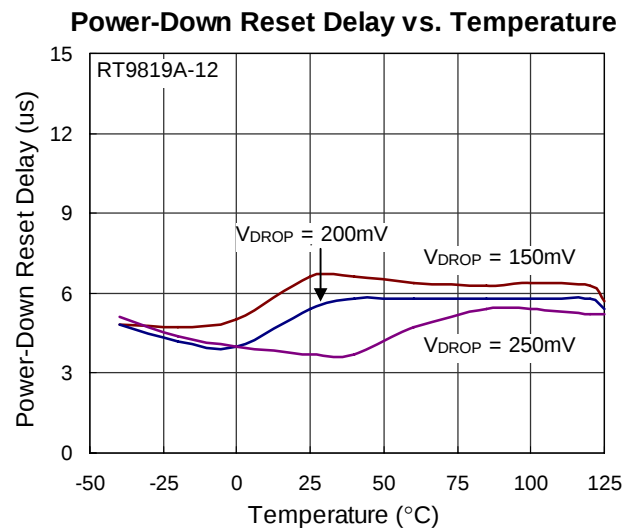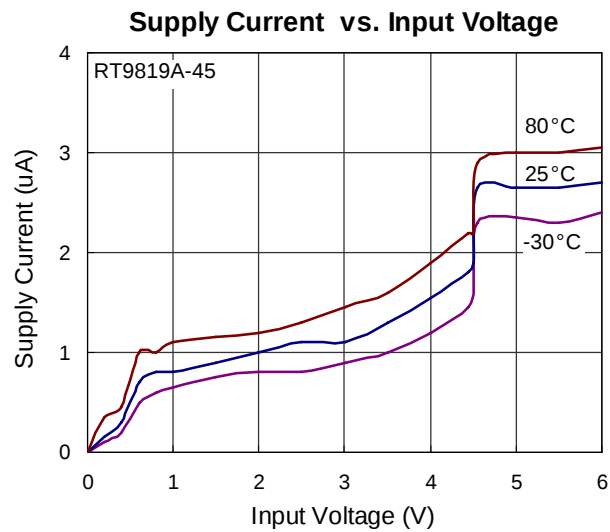


Reset Threshold Deviation vs. Temperature

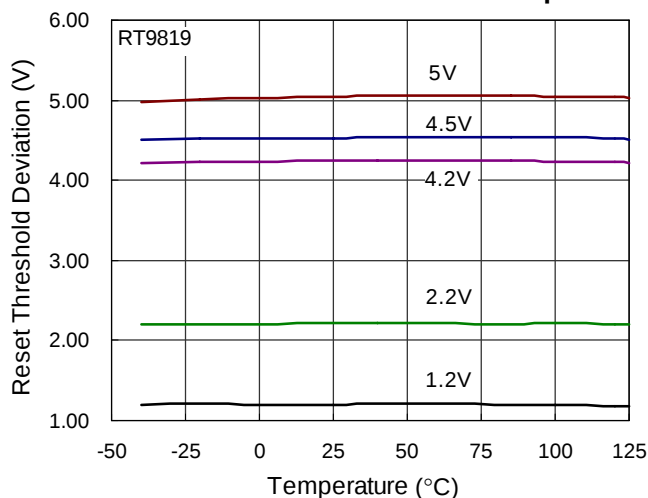


Pch Driver Output Current vs. Input Voltage

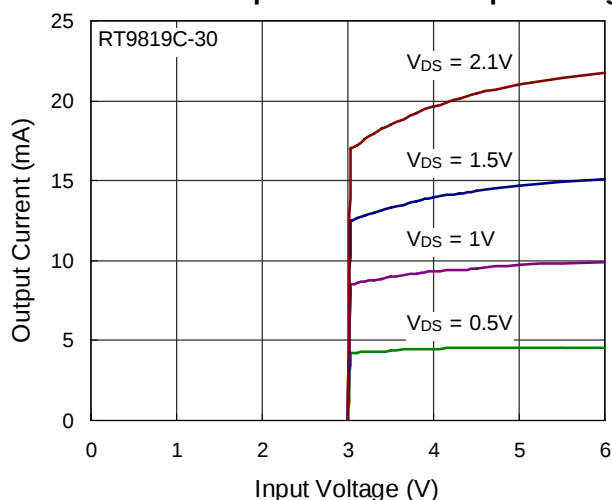


Power-Up Reset Time-Out vs. Temperature

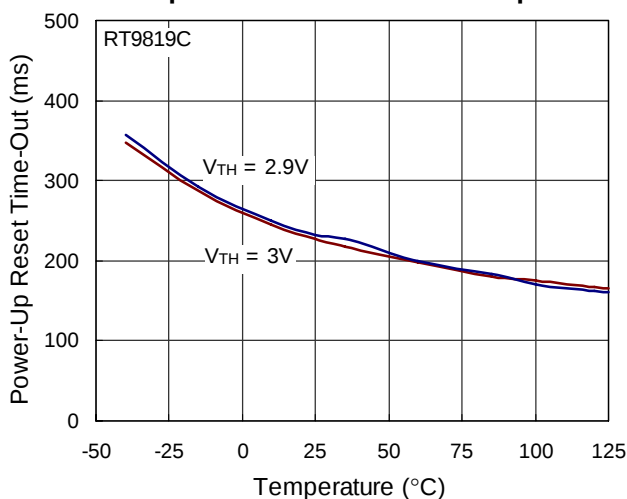


Power-Up Reset Time-Out vs. Temperature

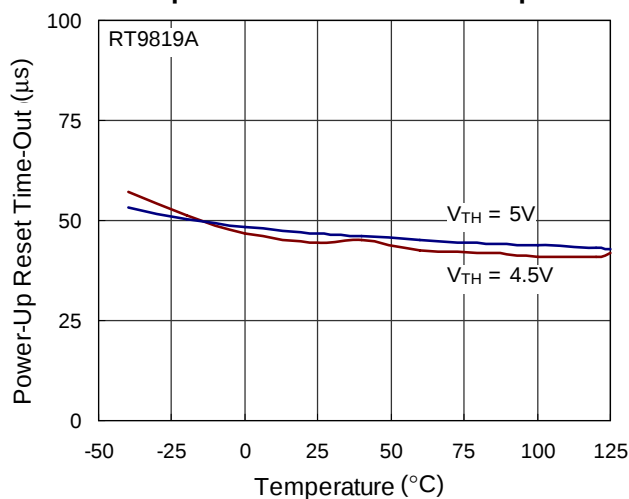


Output Delay Time vs. Load Capacitance

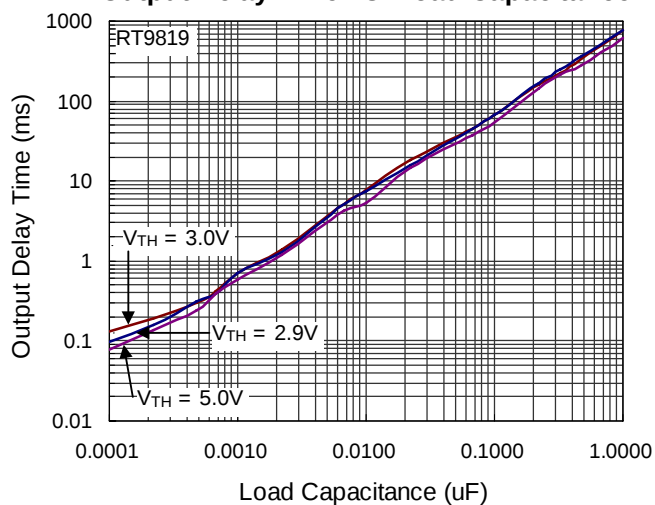


Nch Driver Output Current vs. VDS

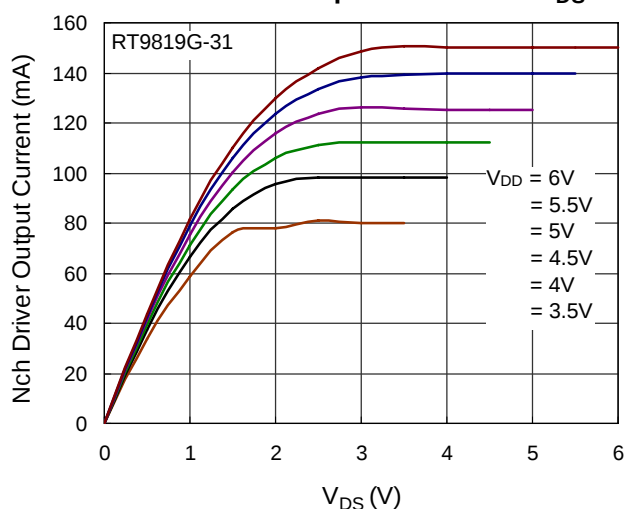


### Nch Driver Output Current vs. Input Voltage

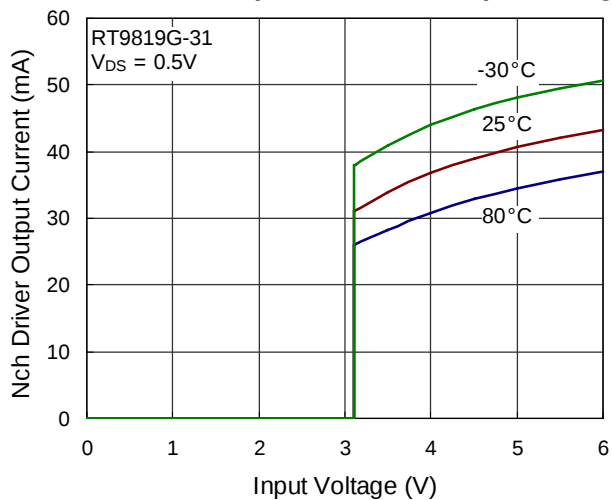


### Power Down Reset Time-Out vs. Temperature

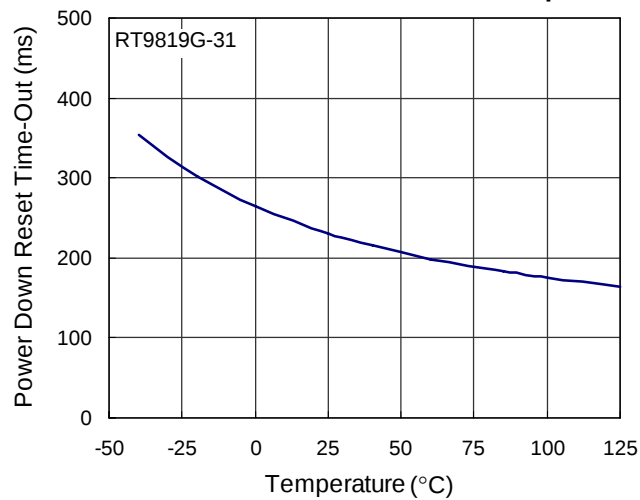

### Output Voltage vs. Input Voltage

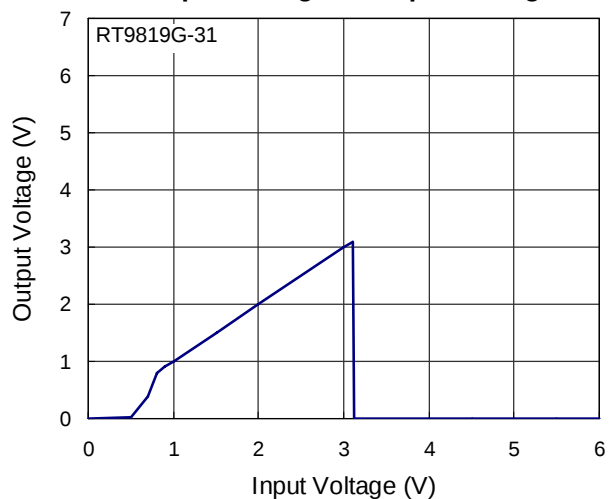

### Power-Down Reset Time-Out vs. Temperature

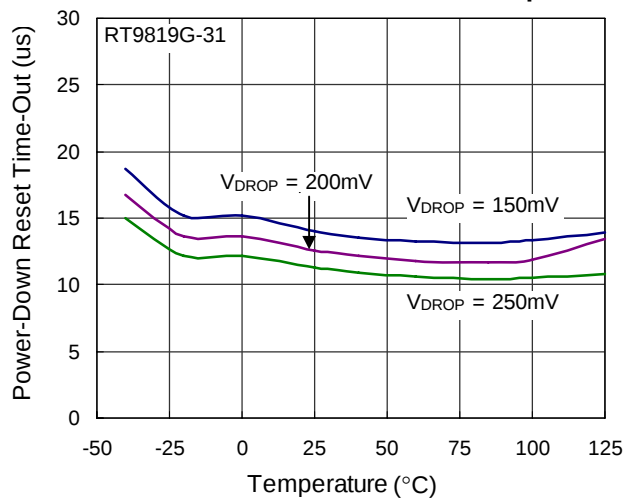


## Application Information

### Benefits of Highly Accurate Reset Threshold


Most  $\mu$ P supervisor ICs have reset threshold voltages between 1% and 1.5% below the value of nominal supply voltages. This ensures a reset will not occur within 1% of the nominal supply, but will occur when the supply is 1.5% below nominal.

## Outline Dimension

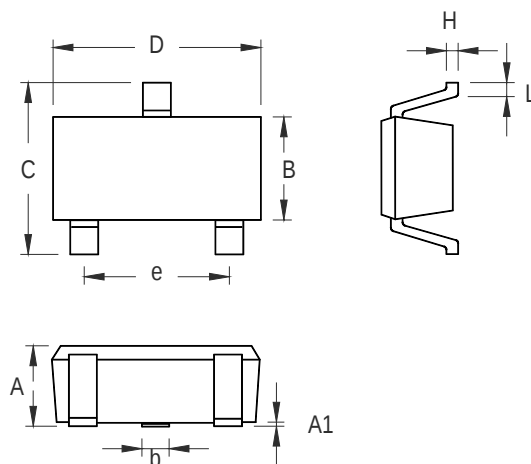


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.800                     | 1.100 | 0.031                | 0.044 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| B      | 1.150                     | 1.350 | 0.045                | 0.054 |
| b      | 0.150                     | 0.400 | 0.006                | 0.016 |
| C      | 1.800                     | 2.450 | 0.071                | 0.096 |
| D      | 1.800                     | 2.250 | 0.071                | 0.089 |
| e      | 1.300                     |       | 0.051                |       |
| H      | 0.080                     | 0.260 | 0.003                | 0.010 |
| L      | 0.210                     | 0.460 | 0.008                | 0.018 |

### SC-70-3 Surface Mount Package

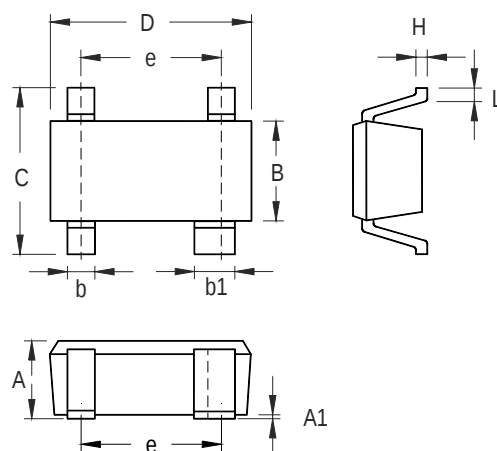



| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.800                     | 1.100 | 0.031                | 0.043 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| B      | 1.150                     | 1.350 | 0.045                | 0.053 |
| b      | 0.150                     | 0.400 | 0.006                | 0.016 |
| b1     | 0.350                     | 0.500 | 0.014                | 0.020 |
| C      | 1.800                     | 2.450 | 0.071                | 0.096 |
| D      | 1.800                     | 2.200 | 0.071                | 0.087 |
| e      | 1.300                     |       | 0.051                |       |
| H      | 0.080                     | 0.260 | 0.003                | 0.010 |
| L      | 0.200                     | 0.460 | 0.008                | 0.018 |

SC-82 Surface Mount Package

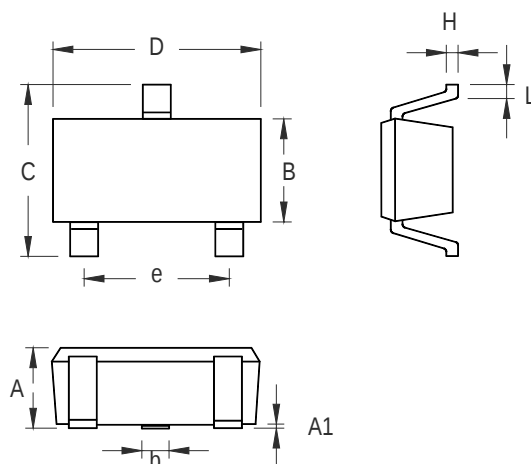

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.889                     | 1.295 | 0.035                | 0.051 |
| A1     | 0.000                     | 0.152 | 0.000                | 0.006 |
| B      | 1.397                     | 1.803 | 0.055                | 0.071 |
| b      | 0.356                     | 0.508 | 0.014                | 0.020 |
| C      | 2.591                     | 2.997 | 0.102                | 0.118 |
| D      | 2.692                     | 3.099 | 0.106                | 0.122 |
| e      | 1.803                     | 2.007 | 0.071                | 0.079 |
| H      | 0.080                     | 0.254 | 0.003                | 0.010 |
| L      | 0.300                     | 0.610 | 0.012                | 0.024 |

**SOT-23-3 Surface Mount Package**

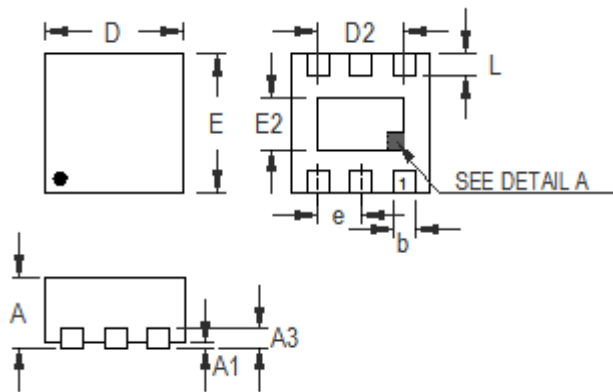

**DETAIL A**

Pin #1 ID and Tie Bar Mark Options

Note : The configuration of the Pin #1 identifier is optional, but must be located within the zone indicated.

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.700                     | 0.800 | 0.028                | 0.031 |
| A1     | 0.000                     | 0.050 | 0.000                | 0.002 |
| A3     | 0.175                     | 0.250 | 0.007                | 0.010 |
| b      | 0.200                     | 0.300 | 0.008                | 0.012 |
| D      | 1.550                     | 1.650 | 0.061                | 0.065 |
| D2     | 0.950                     | 1.050 | 0.037                | 0.041 |
| E      | 1.550                     | 1.650 | 0.061                | 0.065 |
| E2     | 0.550                     | 0.650 | 0.022                | 0.026 |
| e      | 0.500                     |       | 0.020                |       |
| L      | 0.190                     | 0.290 | 0.007                | 0.011 |

**W-Type 6L DFN 1.6x1.6 Package**

**Richtek Technology Corporation**

5F, No. 20, Taiyuen Street, Chupei City  
Hsinchu, Taiwan, R.O.C.  
Tel: (8863)5526789

Richtek products are sold by description only. Richtek reserves the right to change the circuitry and/or specifications without notice at any time. Customers should obtain the latest relevant information and data sheets before placing orders and should verify that such information is current and complete. Richtek cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Richtek product. Information furnished by Richtek is believed to be accurate and reliable. However, no responsibility is assumed by Richtek or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Richtek or its subsidiaries.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)