



MA605.A.ABC.001
on ground-plane

Spartan

MA605.A.ABC.001

Specification

Part No.	MA605.A.ABC.001
Product Name	Spartan 3in1 MA.605 Low Profile Screw-Mount (Permanent Mount) GPS/GLONASS/Cellular/2.4GHz ~ 5GHz Combination Antenna
Feature	Cellular 850/900/1700/1800/2100MHz GSM/CDMA/UMTS/HSPA GPS/GLONASS – 4 dBic 2.4GHz~5GHz 4dBi (incl. 3m cable) IP67 Waterproof High Efficiency / Peak Gain Outdoor Antenna Advanced RF Design and Materials Heavy Duty – Integrated Metal Base/ Ground-plane ABS High Isolation Gasket Custom cables and connectors available RoHS Compliant

1. Introduction

The Spartan MA.605 antenna is a low profile, heavy-duty, fully IP67 waterproof external M2M antenna for use in telematics, transportation and remote monitoring applications.

The Spartan MA.605 antenna is unique in the market because it combines 3in1 GPS/GLONASS, Cellular (2G and 3G) and Wi-Fi antennas in a heavy-duty structure with high efficiency in a low profile compact format. The antenna screws down permanently onto a roof or metal panel and can be pole or wall-mounted.

Antenna includes a high isolation gasket to reduce risk of high voltage current on the mounting area, which prevents metal area short circuiting through the cable.

For industries such as commercial vehicle telematics, remote monitoring, smart meter systems, construction equipment, at only 40mm high, the Spartan provides an unobtrusive, robust, rugged antenna that is durable even in extreme environments. Custom designed integrated wall mounted and pole mounted brackets are available for the Spartan antennas. These patent pending mounts allow for 180 degrees

freedom of movement of the antennas for ease of positioning while also preventing access to the cables so they cannot be cut by vandals or thieves and also protecting the cables from long term weather exposure.

The removal of unsightly cables also leads to a cleaner more professional installation and look, and makes the antenna less identifiable and more unobtrusive.

Customized cable sleeves can be supplied for extra protection where required.

2. Specification

GPS-GLONASS

Centre Frequency	1575.42MHz / 1602MHz
Bandwidth	10MHz
Radiation Efficiency	50 (without cable)
Passive Gain @ Zenith	4.0 typ(with $\psi = 140$ mm ground)
VSWR	2
Impedance	50 Ω
DC Power Input Range	3 ~ 5V

DC input	3.3V		4.0V		5.5V	
MHz	1575.42	1602	1575.42	1602	1575.42	1602
VSWR	2	2	2	2	2	2
LNA Gain	29.2	29	31	31	32.3	32
Noise Figure	3.1	3.1	3.2	3.2	3.4	3.4
Power Consumption	7.5	7.5	9.4	9.4	15	15
Band Attenuation	1520MHz: -20dB		1520MHz: -20dB		1520MHz: -20dB	
	1642MHz: -20dB		1642MHz: -20dB		1642MHz: -20dB	

Cable	3M RG-174 standard, fully customizable
Connector	SMA(M) standard, fully customizable

2. Specification

Cellular

Frequency (GHz)	824 ~ 896	880 ~ 960	1710 ~ 1880	1850 ~ 1990	1710 ~ 2170
Peak Gain (dBi)*	3.4	3.2	3.8	3.0	3.8
Average (dBi)*	1.2	1.5	0.4	-0.1	-0.2
Efficiency*	62%	50%	44%	38%	35%
Impedance	50Ω				
Polarization	Linear				
Radiation Pattern	Omni				
Cable	3M CFD200 standard, fully customizable				
Connector	SMA(M) standard, fully customizable				

WIFI

Frequency (GHz)	2.4 ~ 2.5	4.7 ~ 5.0	5.0 ~ 5.4	5.4 ~ 5.9
Peak Gain (dBi)*	2.1	3.2	4.5	4.4
Average Gain (dBi)*	1.4	2.5	3.2	1.75
Efficiency*	57%	38%	42%	40%
VSWR	<=1.6:1			
Impedance	50Ω			
Polarization	Linear			
Radiation Pattern	Omni			
Cable	3M CFD200 standard, fully customizable			
Connector	RP-SMA(M) standard, standard, fully customizable			

Mechanical

Dimensions	Height 50mm x Diameter 150mm
Casing	UV resistant ABS
Base and thread	Zinc
Thread diameter	30mm
Waterproof	IP67


Environmental

Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH


* Including 3 meters cable loss

3. GPS/GLONASS Antenna Characteristics


3.1 Block Diagram

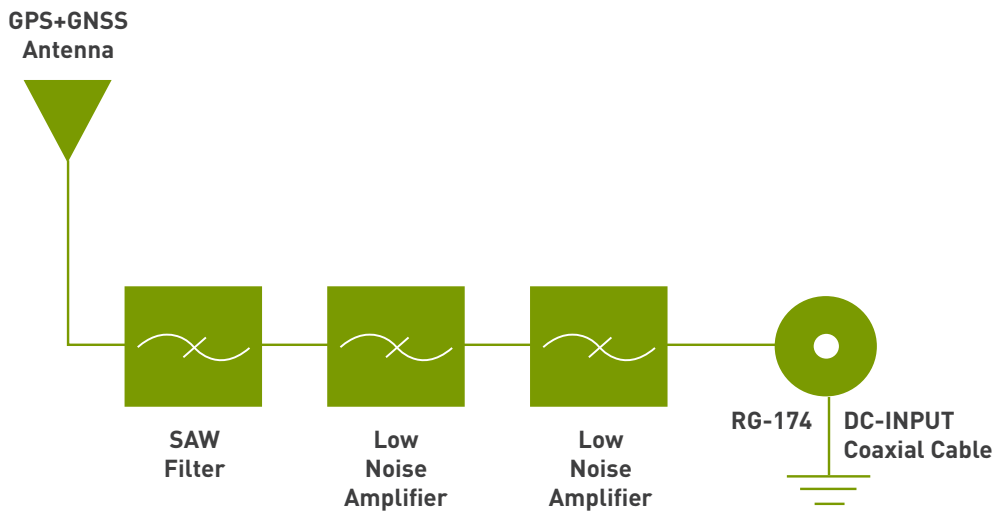

3.2 Return Loss

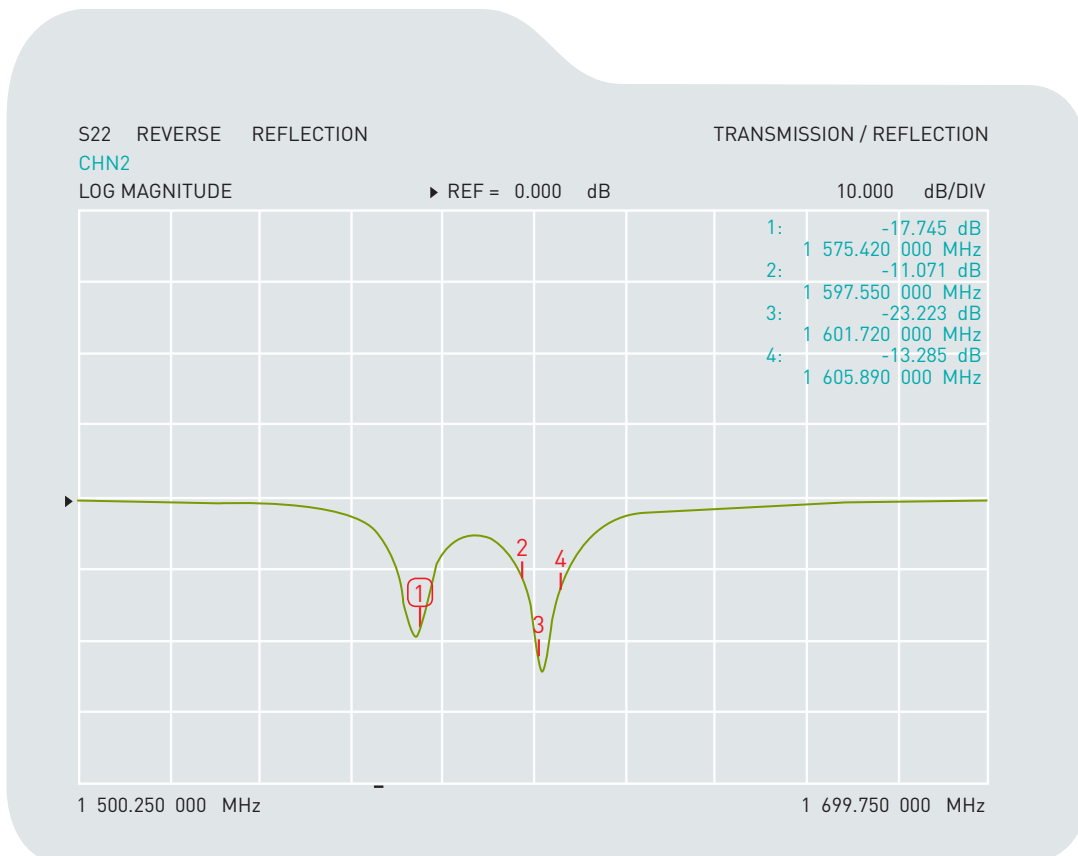

3.3 GPS/GLONASS Antenna Radiation Pattern

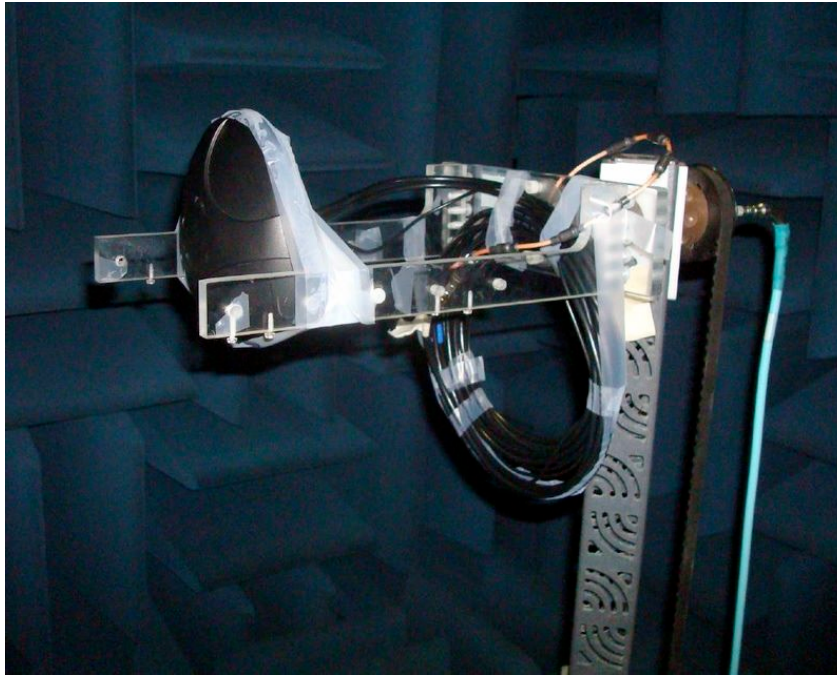


MA.600 tested in CTIA approved 3D chamber




XYZ co-ordinate for reference

3.4 Radiation Pattern

XZ-plane Free Space @1575.42MHz

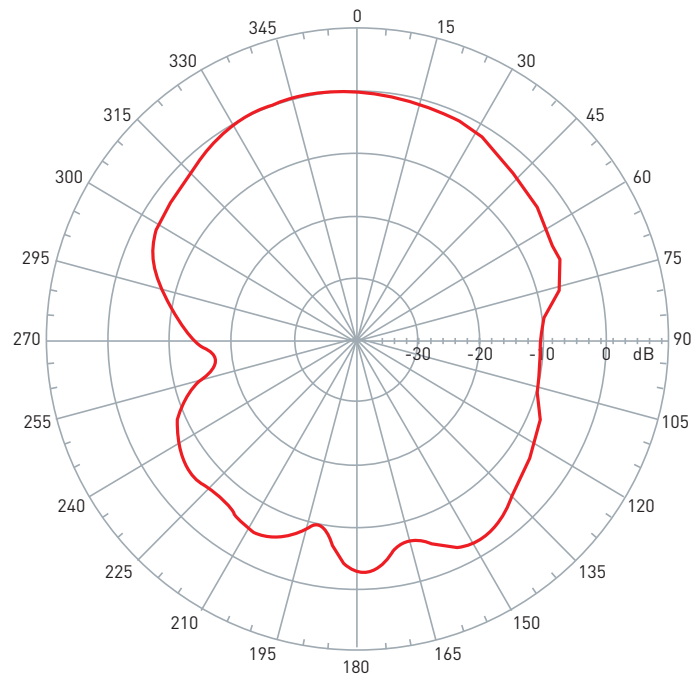


YZ-plane Free Space @1575.42MHz

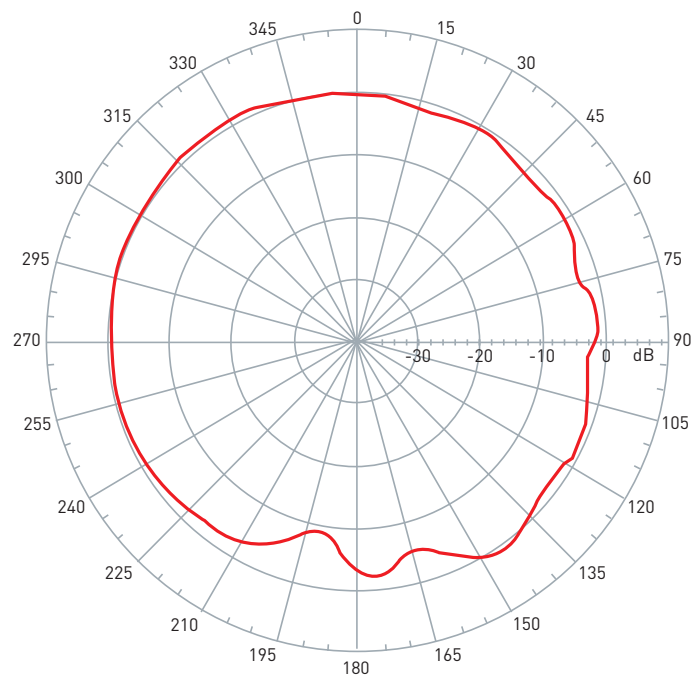


3.4 Radiation Pattern



XZ-plane Free Space @1602MHz

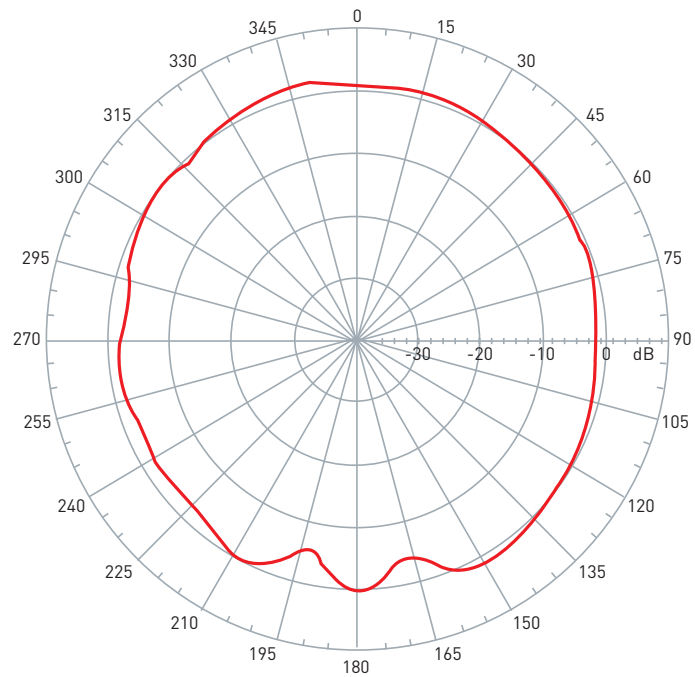

YZ-plane Free Space @1602MHz

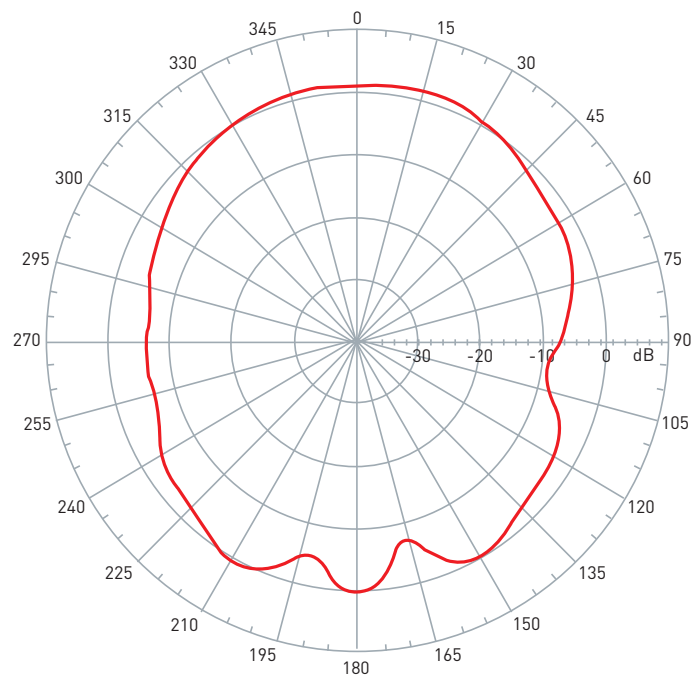


3.5 GPS/GLONASS LNA

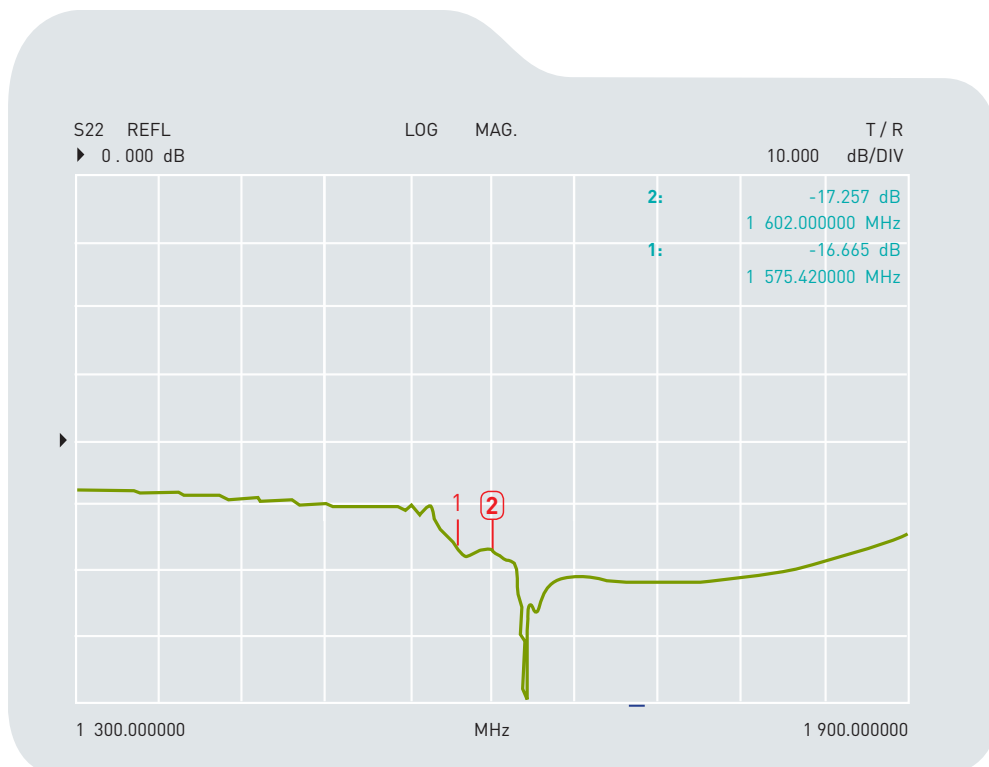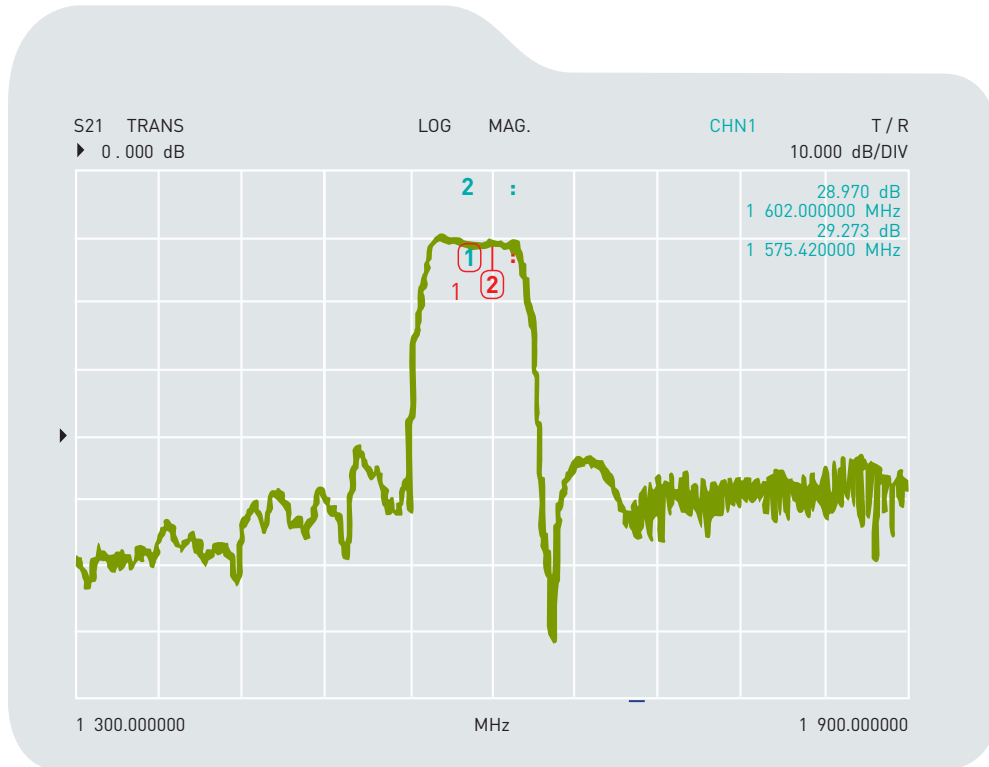


4. Cellular Antenna Characteristics

4.1 Return Loss

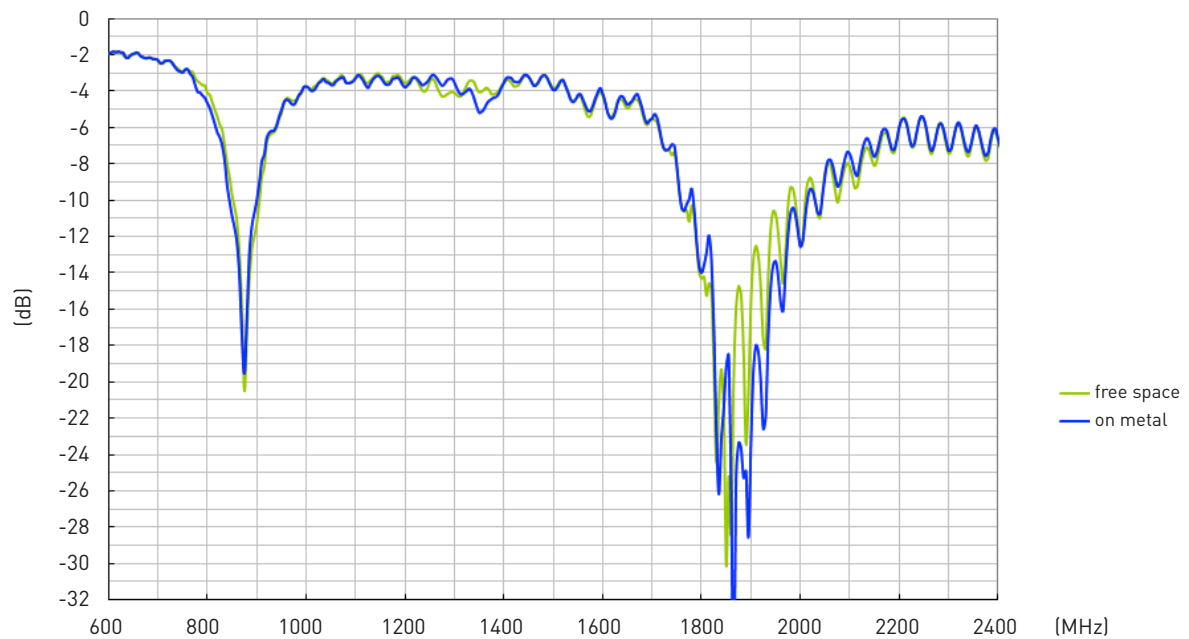


4.2 VSWR

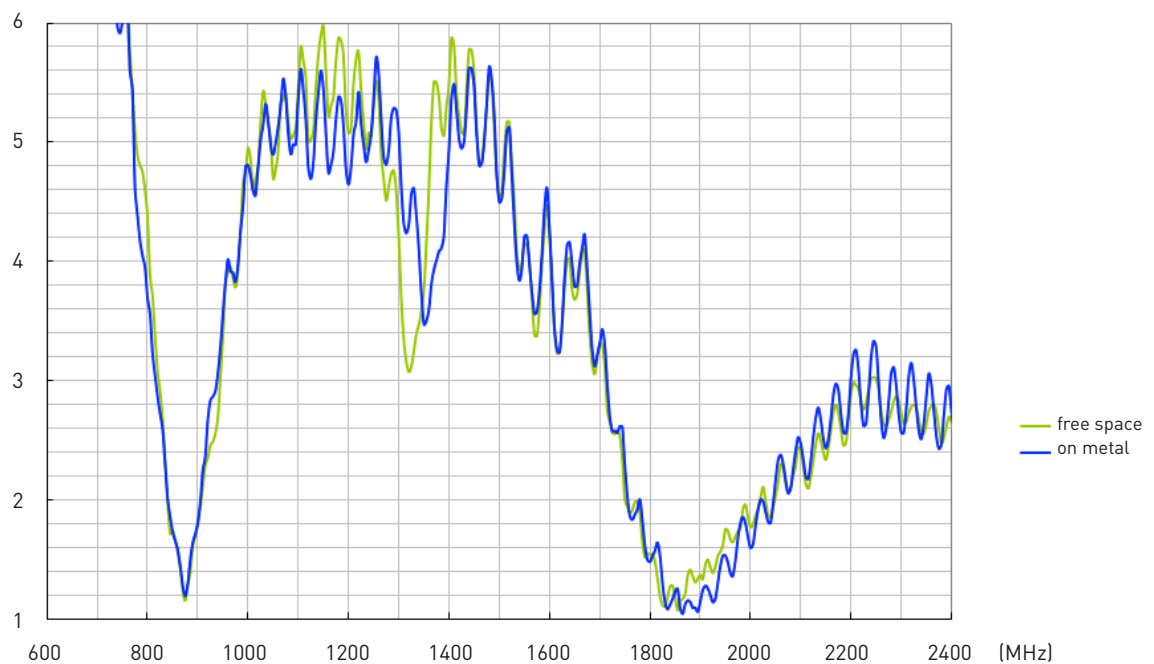


4. Cellular Antenna Characteristics


4.3 Cellular Antenna Efficiency

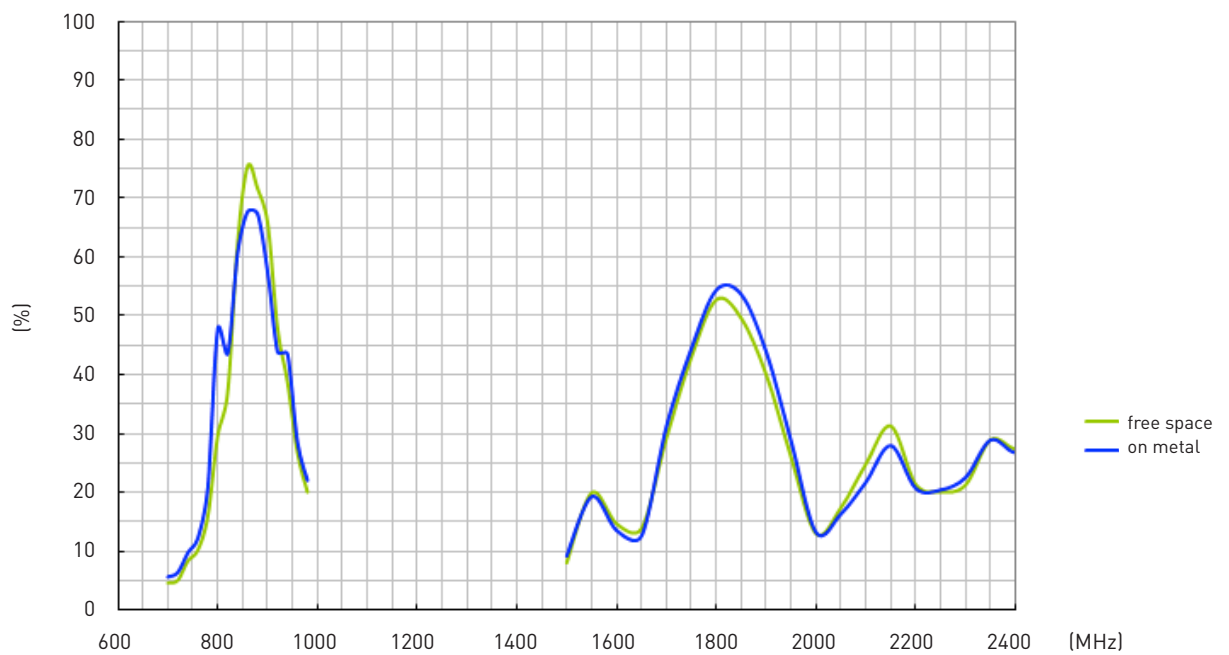

4.4 Cellular Antenna Peak Gain

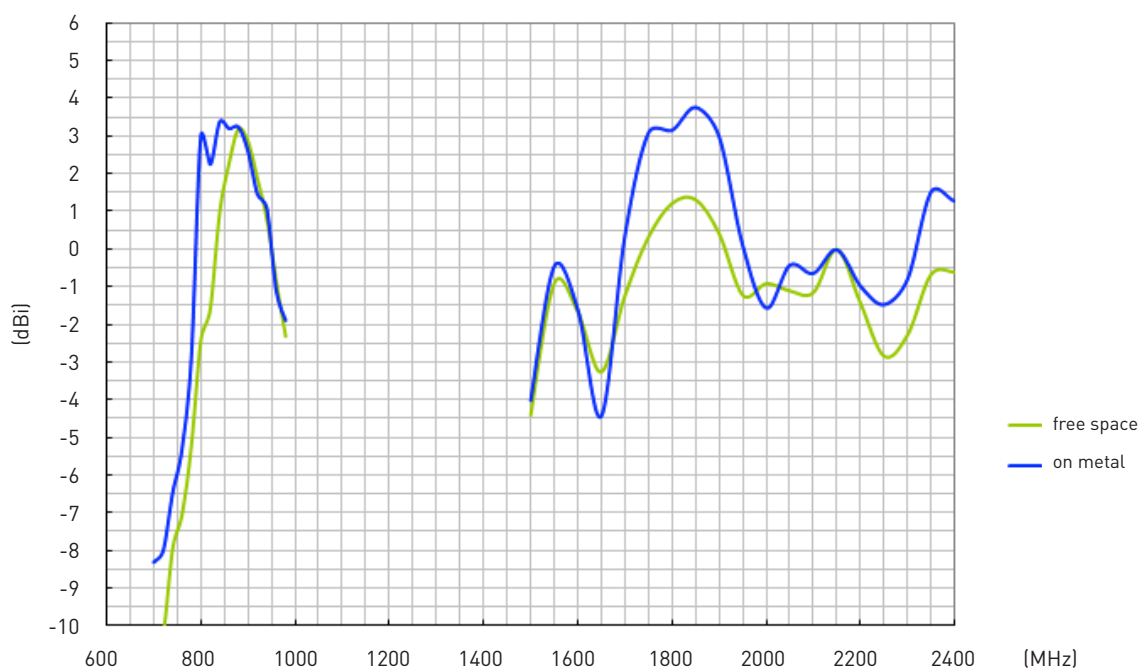


4.5 Cellular Antenna 3D Average Gain

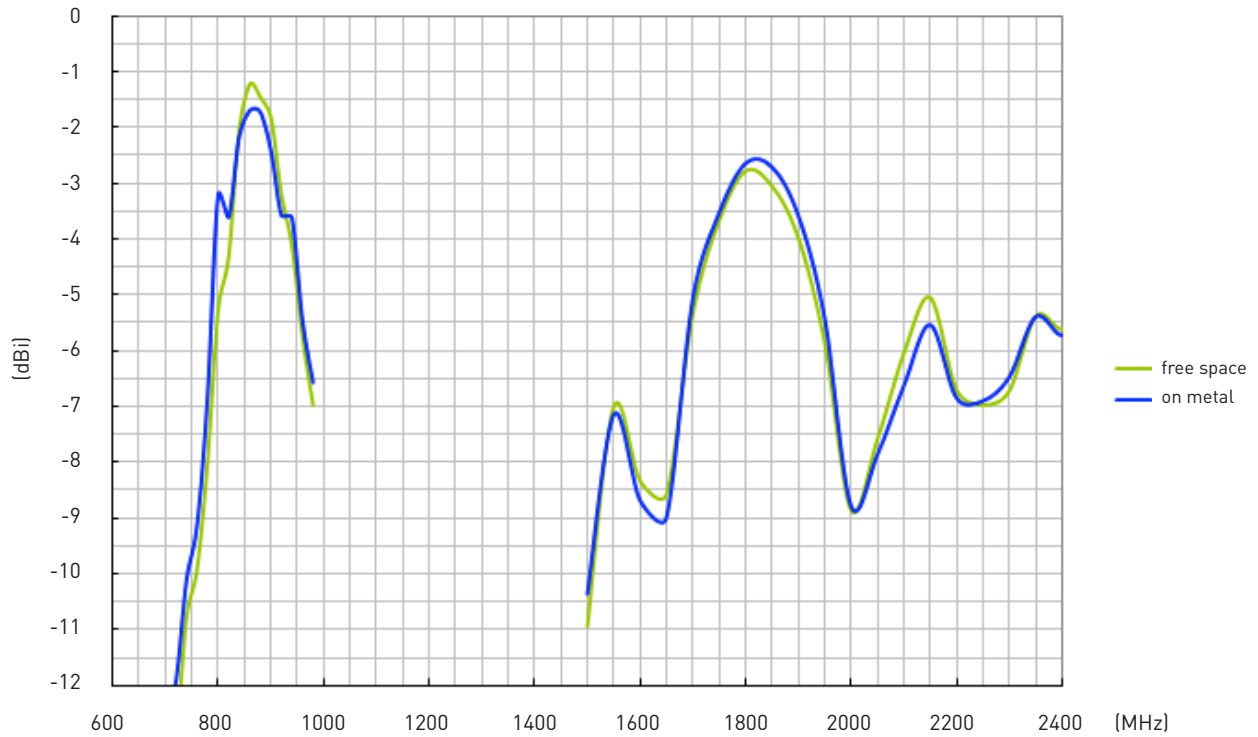


4.6 Cellular Antenna Radiation Pattern in Free Space

XY-Plane

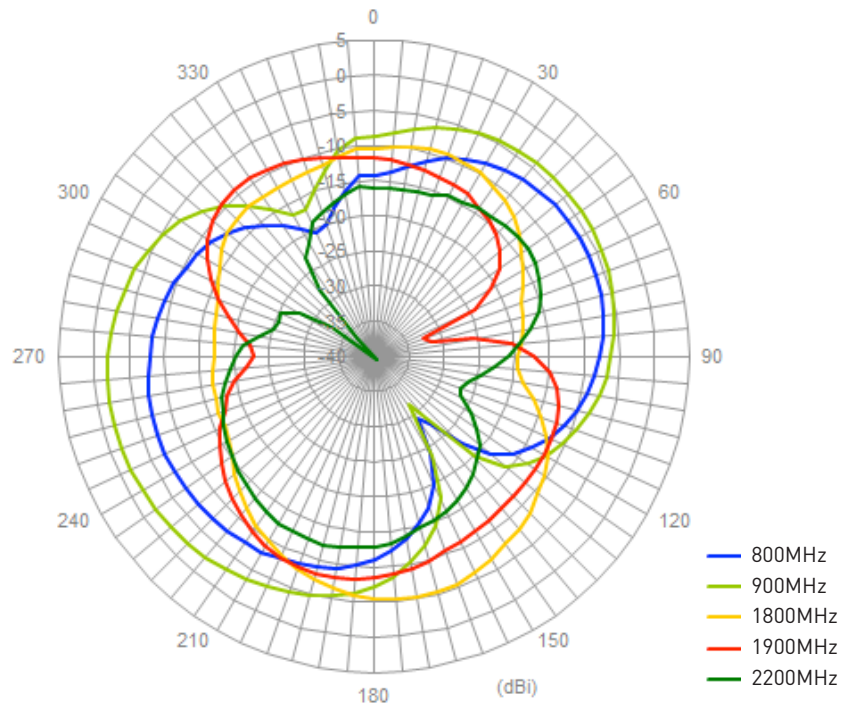


XZ-Plane

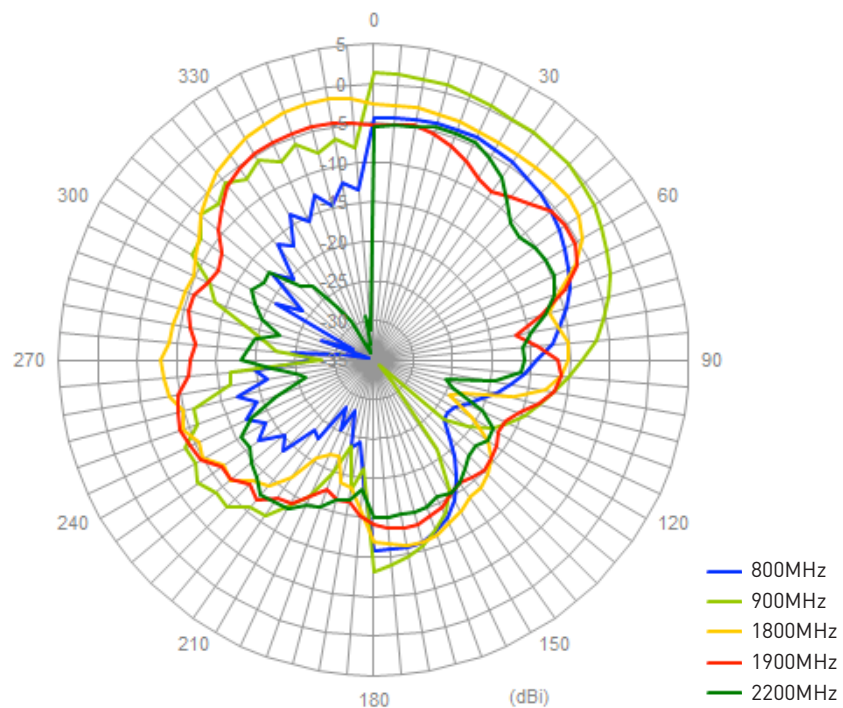


4.7 Cellular Antenna Radiation Pattern on Metal ground plane

XY-Plane

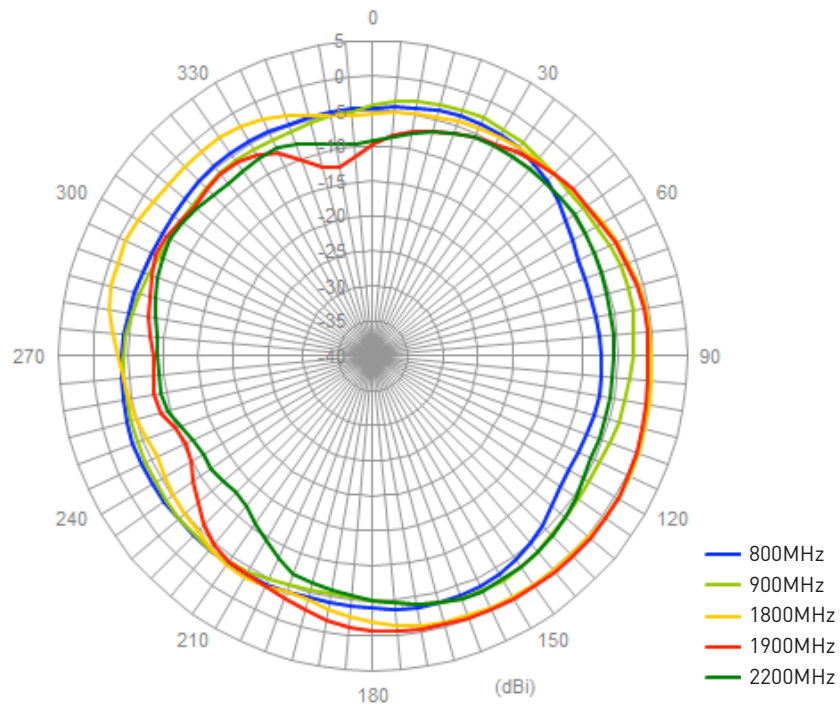


XZ-Plane

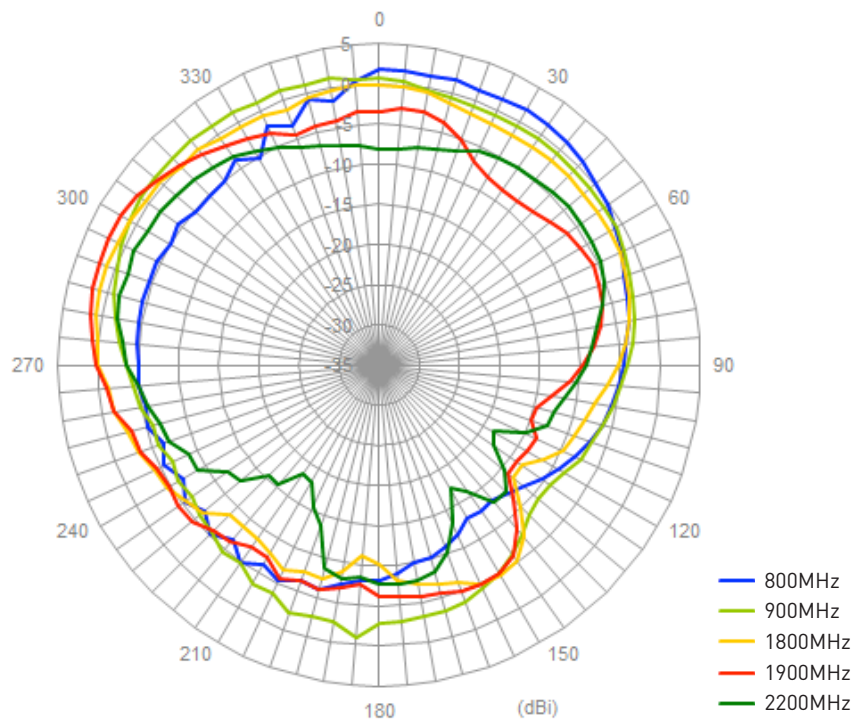


5. 2.4/5GHz Antenna Characteristics



5.1 Return Loss

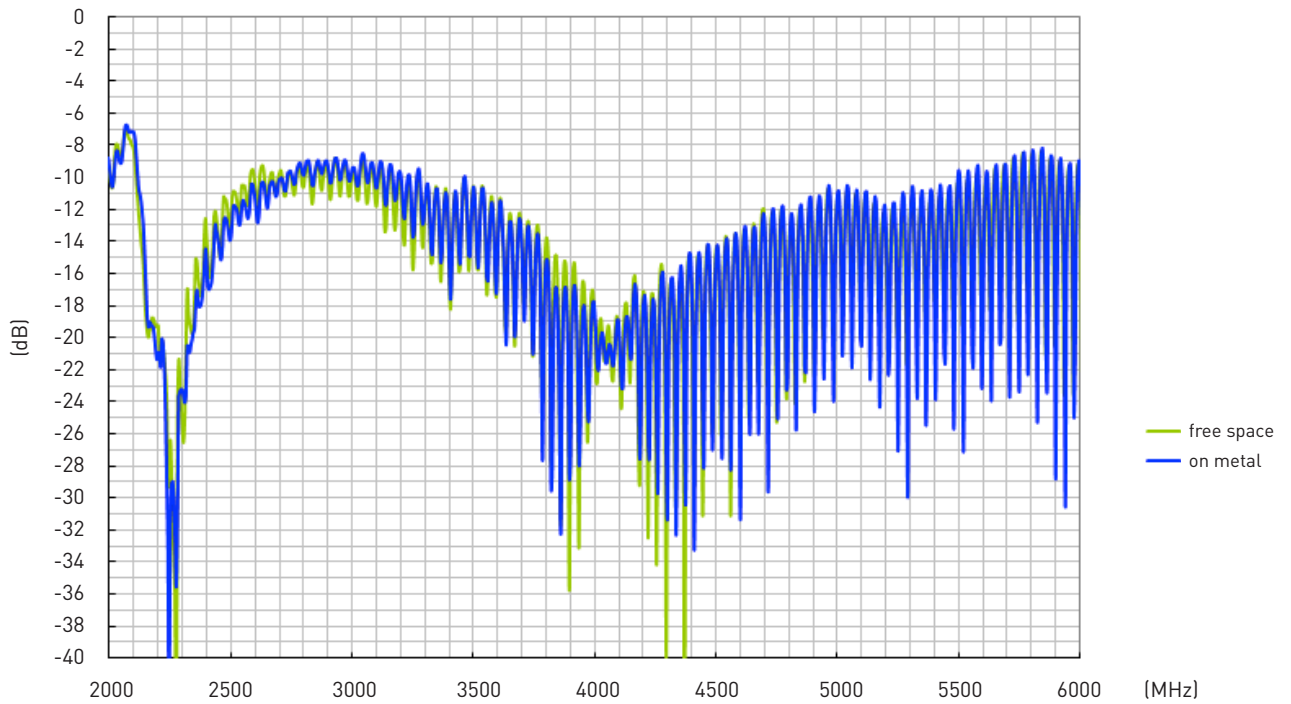



5.2 VSWR

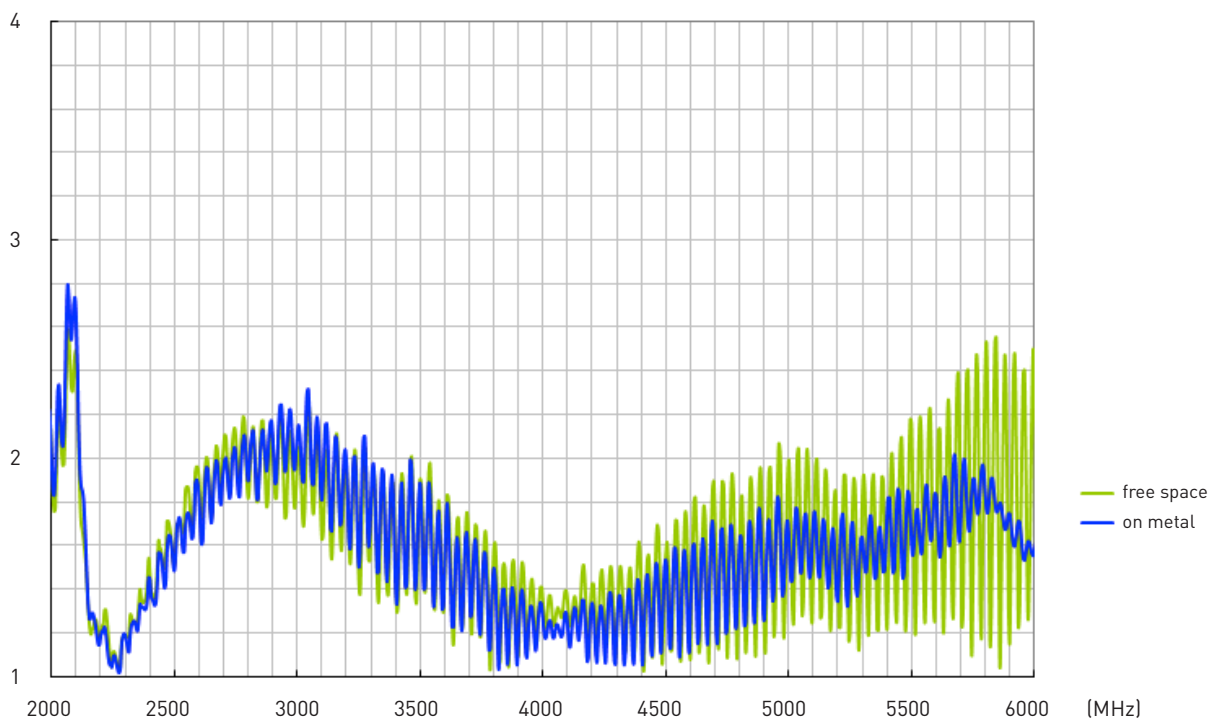



5.3 2.4/5GHz Antenna Efficiency

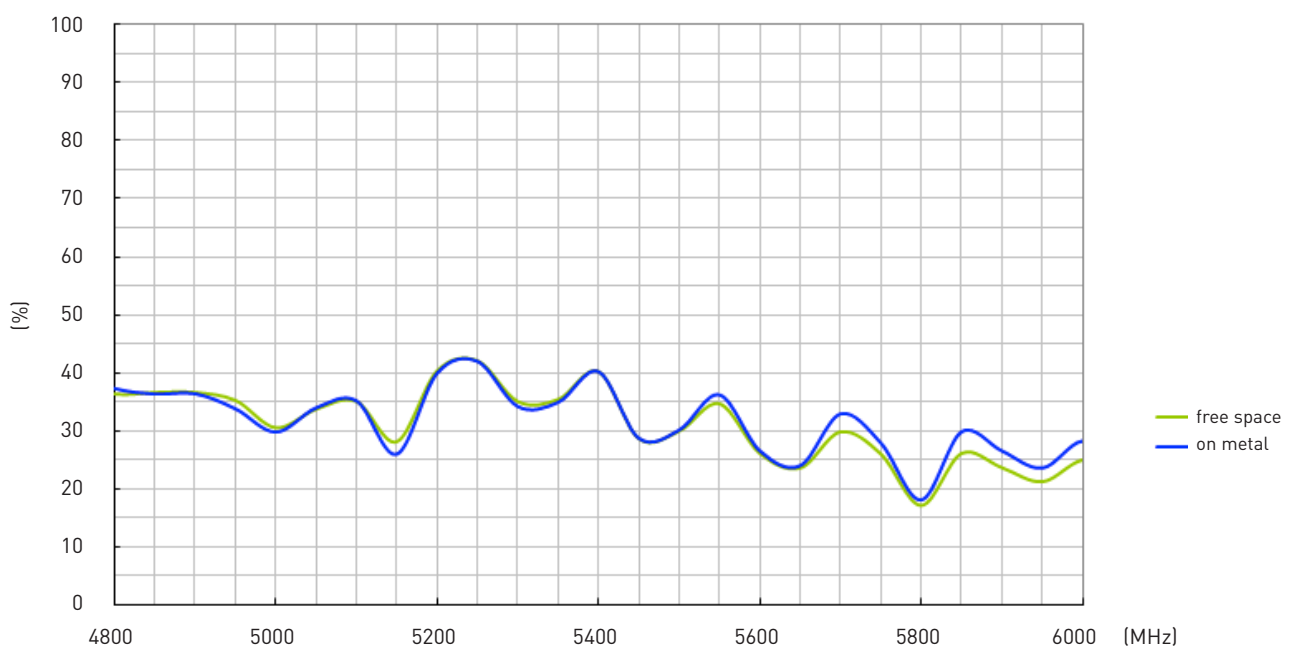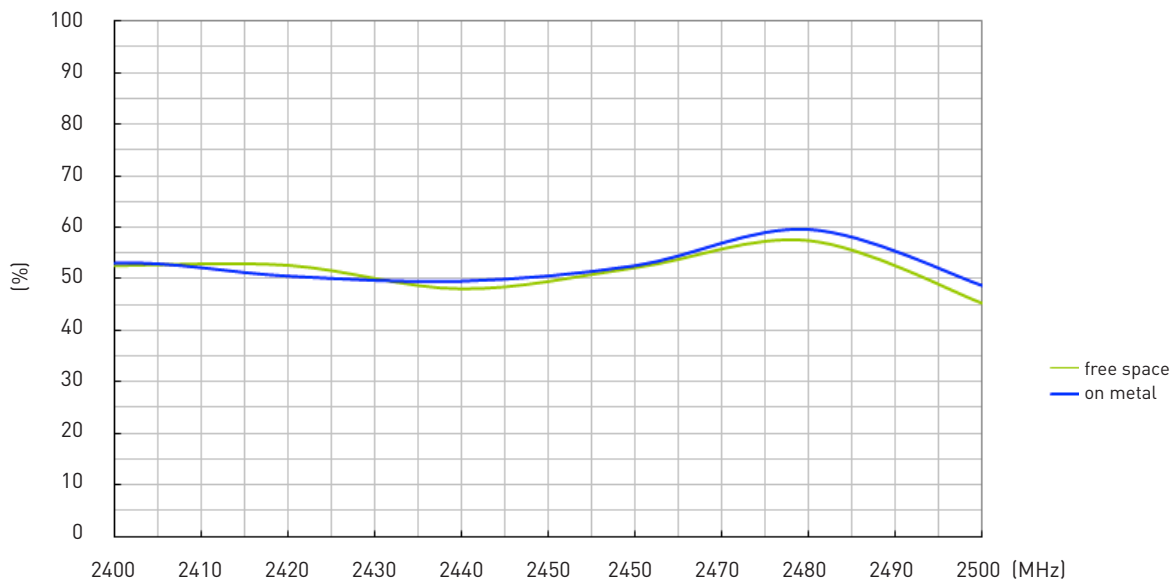

5.4 2.4/5GHz Antenna Peak Gain

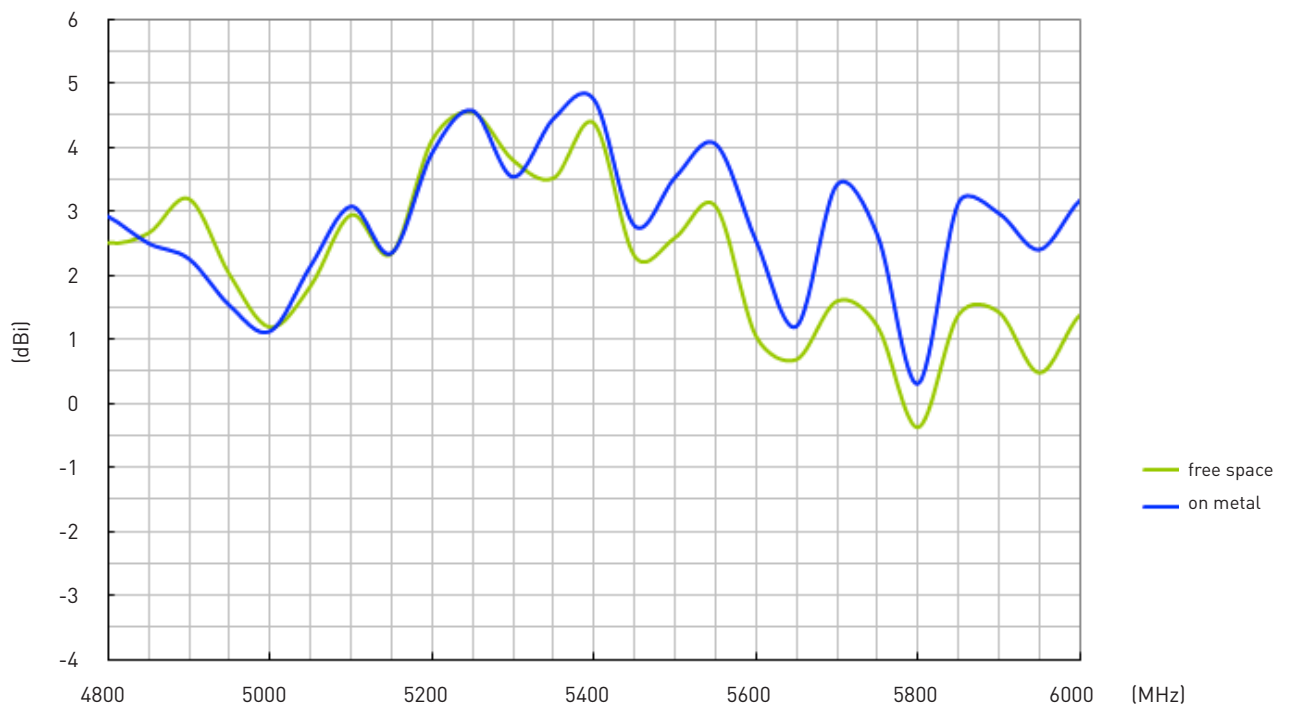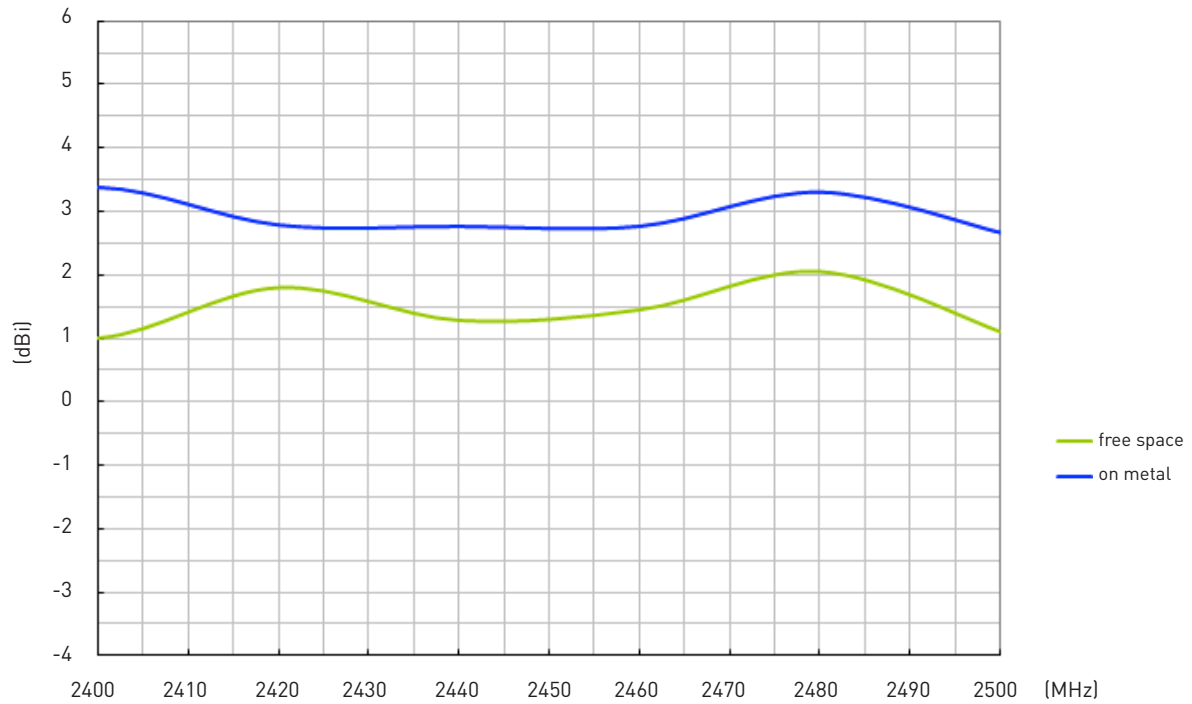


5.5 2.4/5GHz Antenna 3D Average Gain

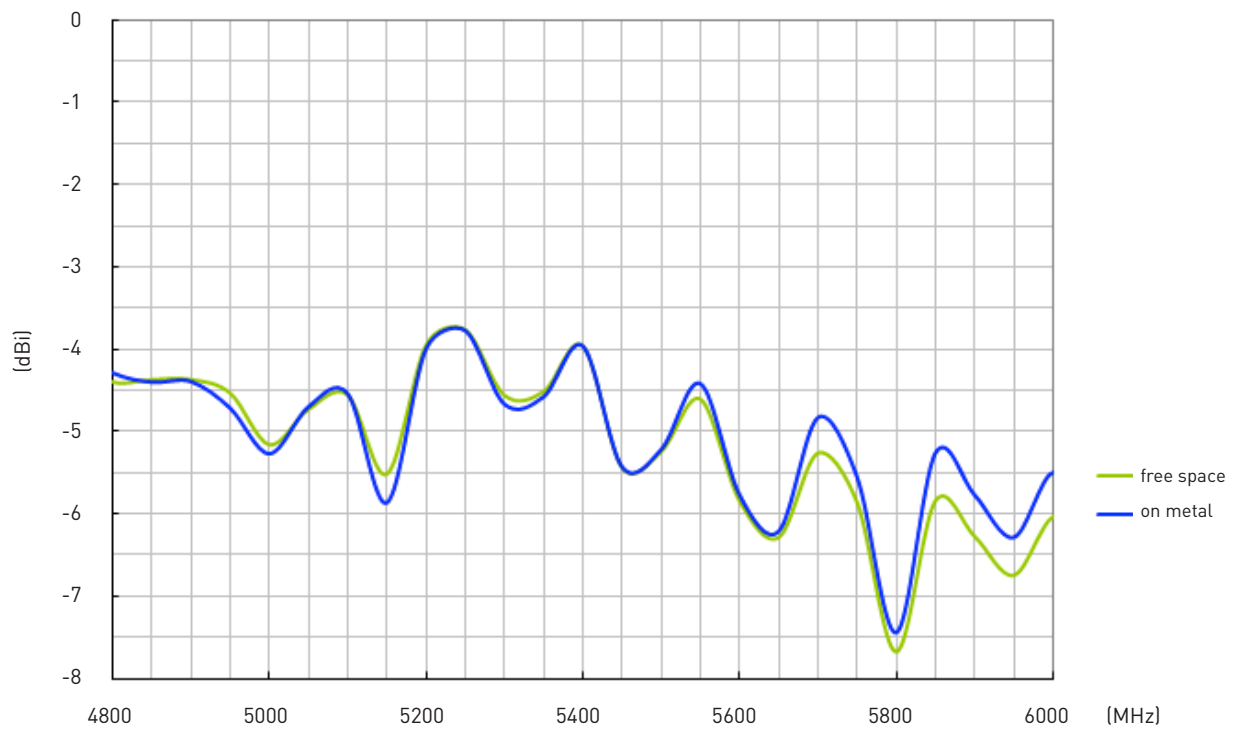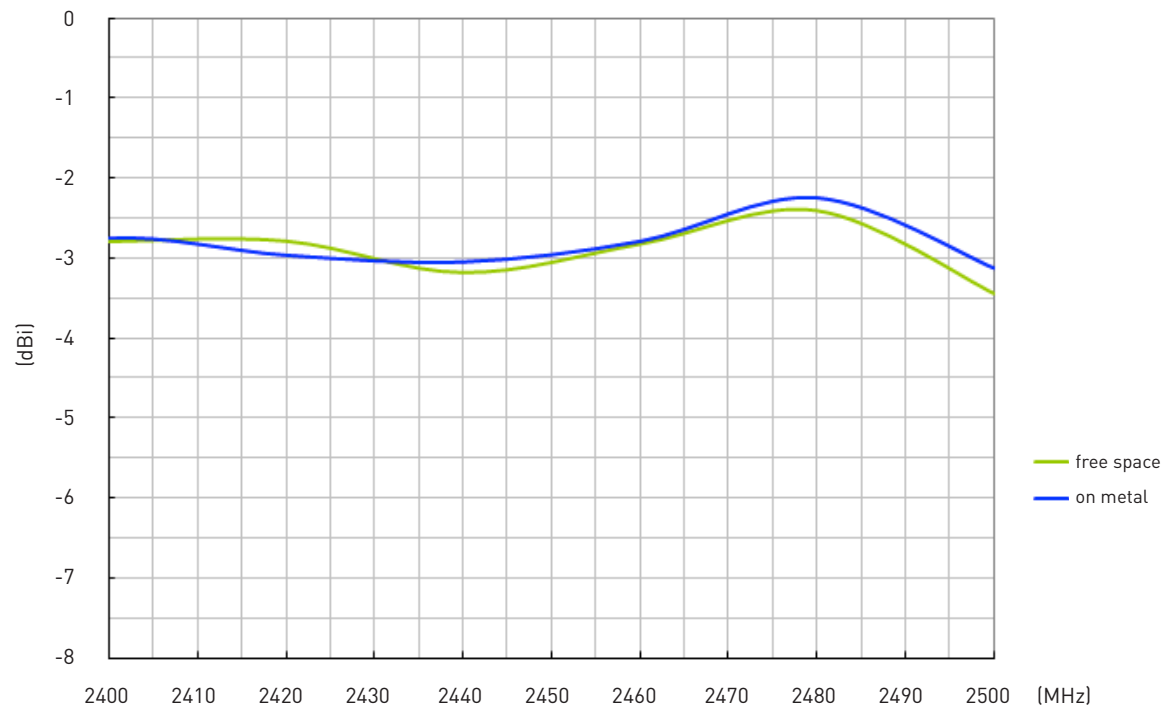


5.6 2.4/5GHz Antenna Radiation Pattern in Free Space

XY-Plane

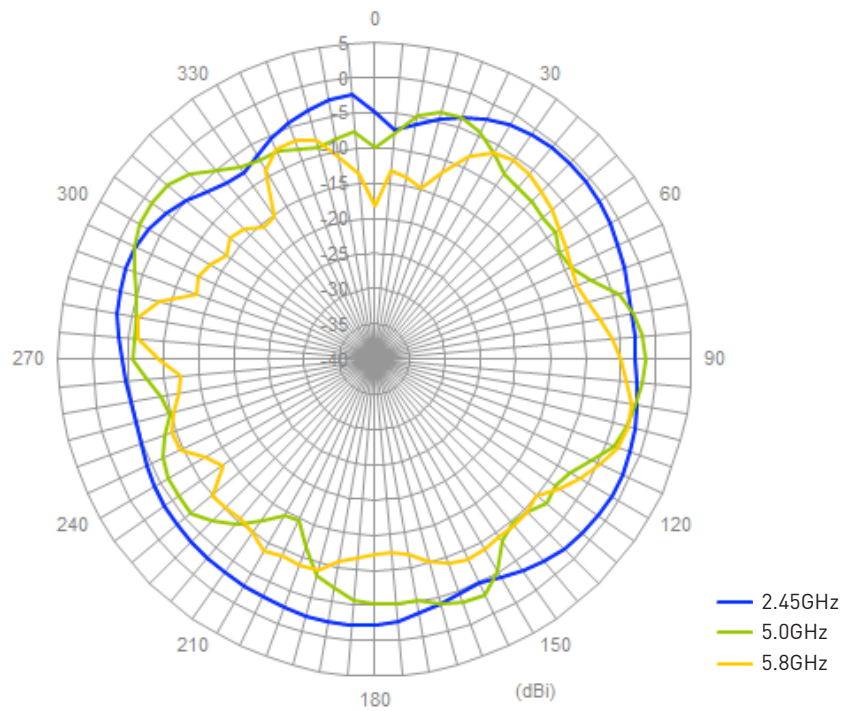


XZ-Plane

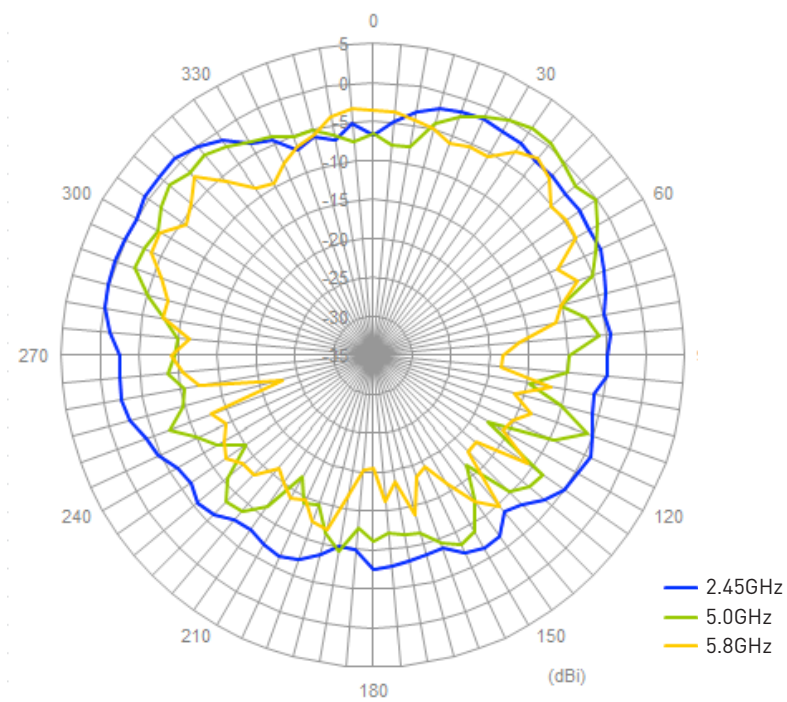


5.7 2.4/5GHz Antenna Radiation Pattern on Metal ground plane



XY-Plane

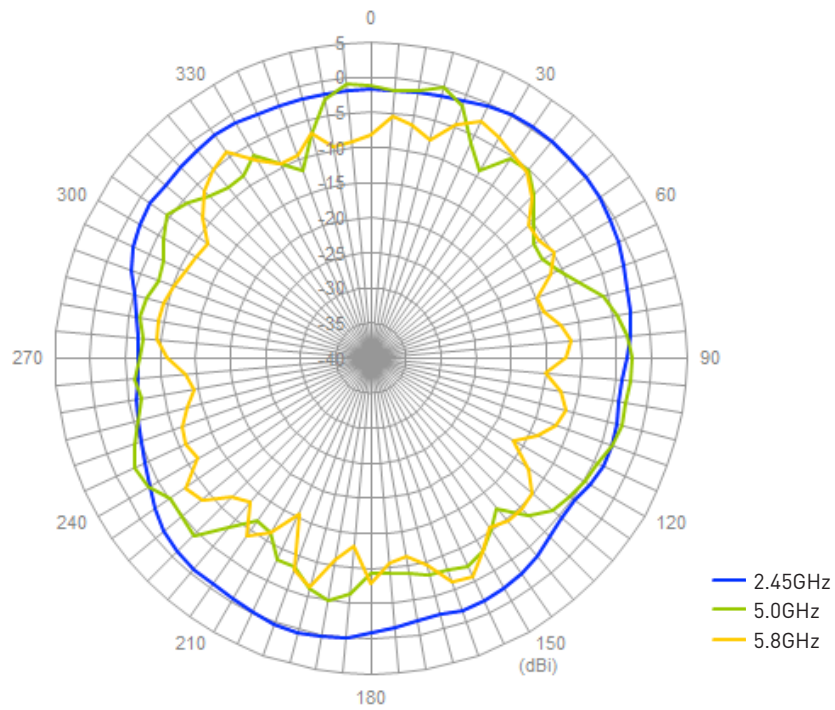


XZ-Plane

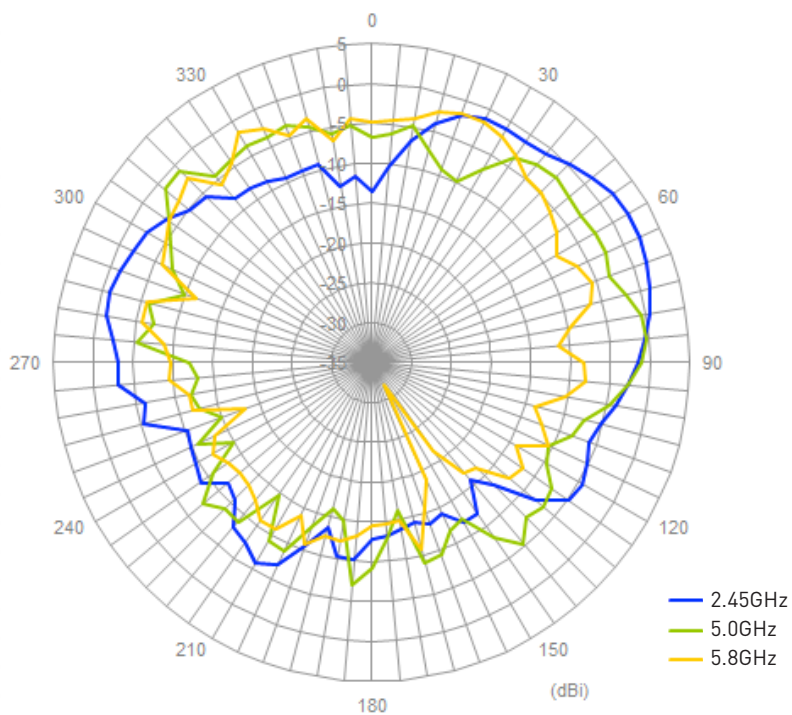

7. Packaging

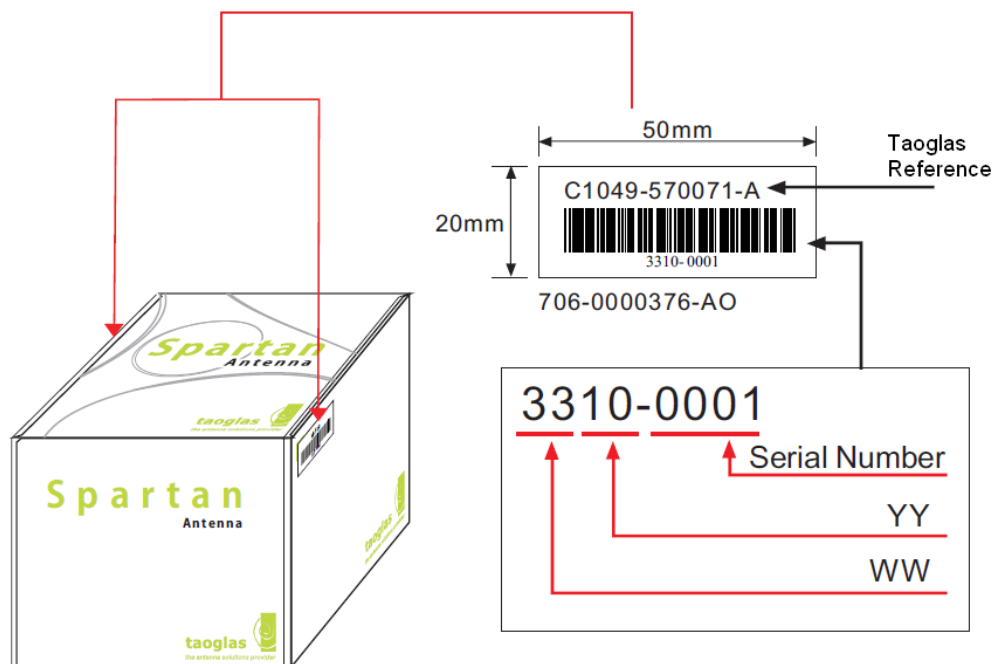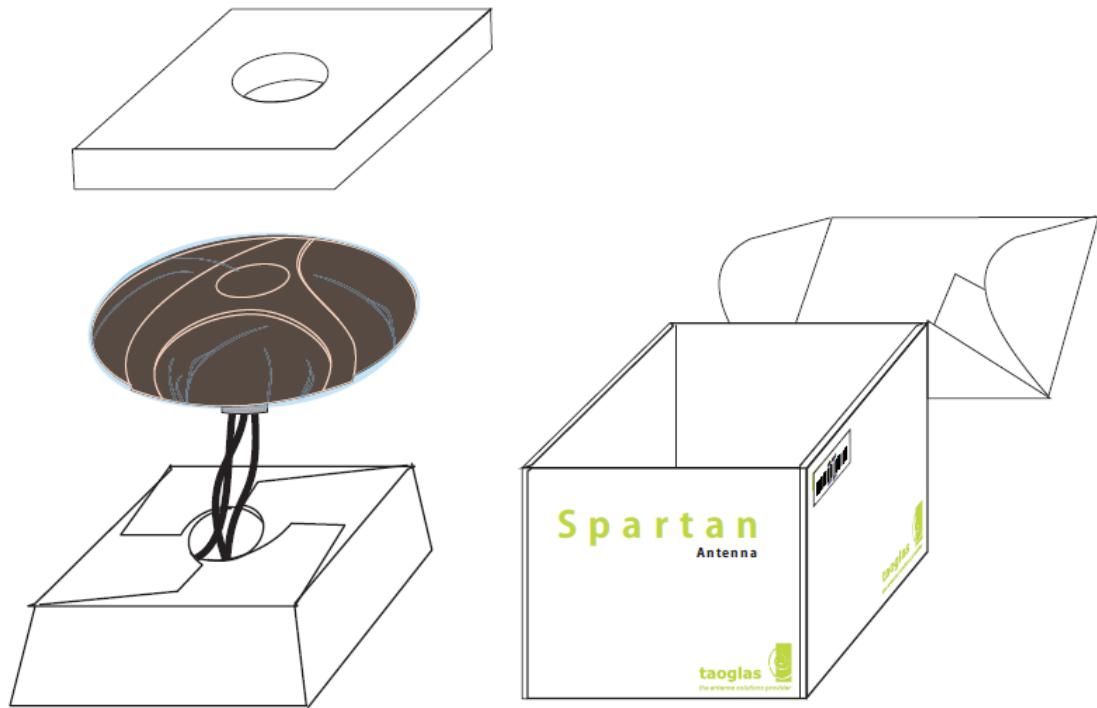

7. Packaging

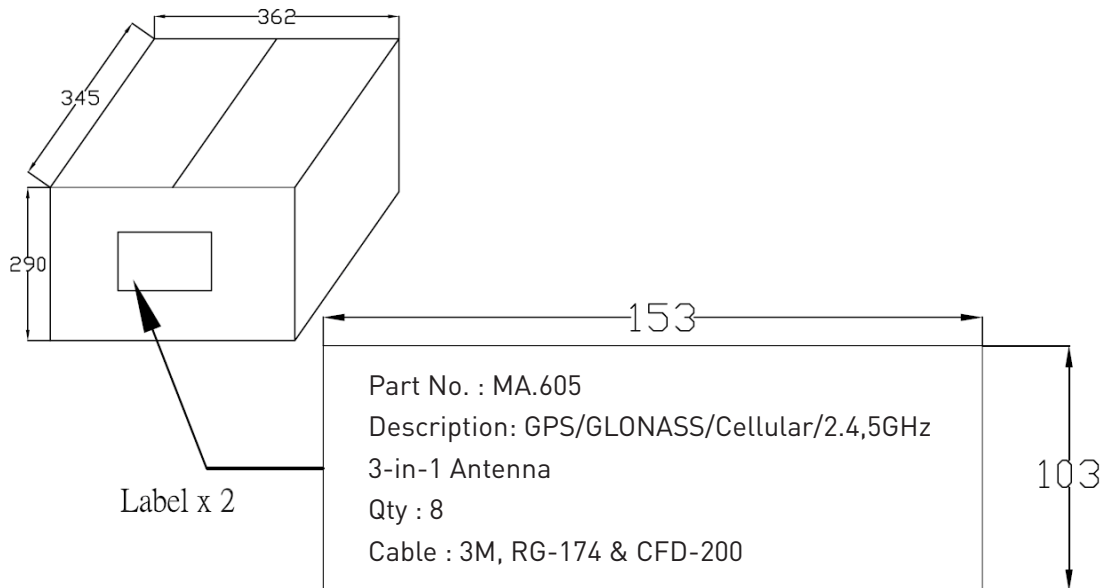

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and

product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.
Copyright © Taoglas Ltd.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com