



**Mallory Sonalert Products, Inc.**

Part #: **MSE28LCM3**

## Sales Outline Drawing


Revision: **B**

### Specifications:


|                       |                               |
|-----------------------|-------------------------------|
| Sound Level Category  | Loud                          |
| Mode of Operation     | Chime @ Once per 1 Second     |
| Voltage Rating        | 20 to 28 VDC                  |
| Frequency             | 3900 $\pm$ 500 Hz             |
| Loudness @ 1 FT       | 85 to 95 dB(A) Typ.           |
| Current Draw          | 50mA MAX                      |
| Housing Material      | Valox (UL94V-0), Color: Black |
| Storage Temperature   | -40° to +80° C                |
| Operating Temperature | -40° to +65° C                |
| Weight (Typical)      | 4.0g                          |
| Options               | Please contact factory.       |

### Dimensions: Inches (mm)


**ROHS Compliant**

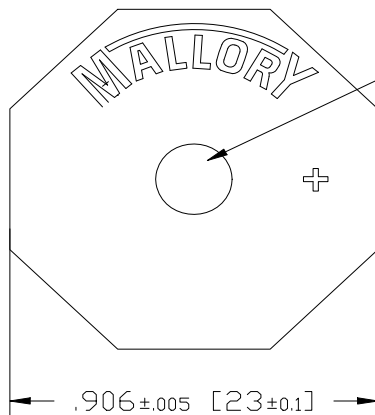

EMISSION HOLE  
 $\varnothing$  .188 $\pm$ .005 [4.8 $\pm$ 0.1]

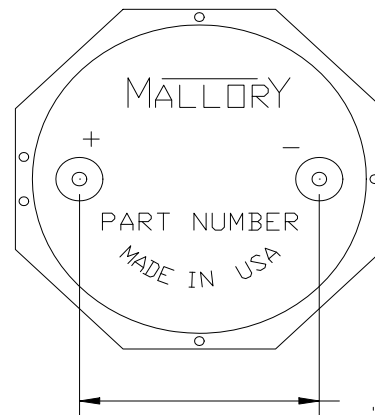

.590 $\pm$ .012 [15 $\pm$ 0.3]

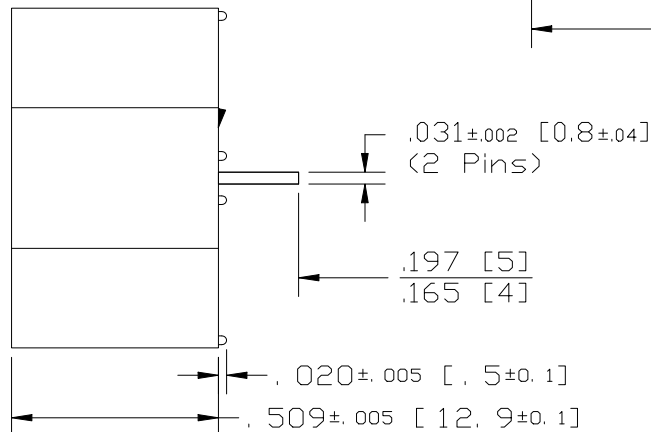

NOTE A:  
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:  
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.  
UNITS ARE SUITABLE FOR WAVE SOLDERING. RECOMMENDED MAXIMUM TEMPERATURE  
AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email       mkt@ameya360.com