



kHz RANGE CRYSTAL UNIT

C - TYPE

C - 2 TYPE / C - 4 TYPE

- Frequency range : 32.768 kHz (20 kHz~120 kHz)
- Thickness : ϕ 1.2 mm ~ ϕ 2.0 mm Max.
- Overtone order : Fundamental
- Applications : Clock and Microcomputer



Product Number (please contact us)


C-002RX : Q11C02RX1xxxx00

C-004R : Q11C004R1xxxx00

C-005R : Q11C005R1xxxx00

C-2 TYPE : Q12C20001xxxx00

C-4 TYPE : Q12C40001xxxx00

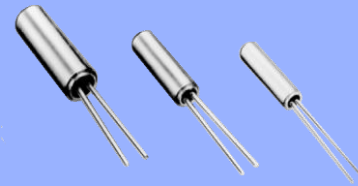

Actual size

C-002RX

C-002RX
C-2 TYPEC-004R
C-4 TYPE

C-005R

Specifications for C-TYPE (characteristics)

Item	Symbol	C-002RX	C-004R	C-005R	Conditions / Remarks
Nominal frequency range	f _{nom}	32.768 kHz			
Storage temperature	T _{stg}	-20 °C to +70 °C			Storage as single product.
Operating temperature	T _{use}	-10 °C to +60 °C			
Level of drive	DL	1.0 μ W Max.			
Frequency tolerance (standard)	f _{tol}	$\pm 20 \times 10^{-6}$			+25 °C, DL=0.1 μ W
Turnover temperature	T _i	+25 °C $\pm$ 5 °C			
Parabolic coefficient	B	$-0.04 \times 10^{-6} / ^\circ\text{C}^2$ Max.			
Load capacitance	CL	6 pF to ∞			Please specify
Motional resistance (ESR)	R ₁	50, 60 k Ω Max. (30 k Ω Typ.)	50 k Ω Max. (30 k Ω Typ.)	50 k Ω Max. (37 k Ω Typ.)	
Motional capacitance	C ₁	2.0 fF	2.0 fF	1.9 fF Typ.	
Shunt capacitance	C ₀	0.85 pF	0.85 pF	0.75 pF Typ.	
Frequency aging	f _{age}	$\pm 3 \times 10^{-6} / \text{year}$ Max.			+25 °C, First year

Specifications for C-2 TYPE C-4 TYPE (characteristics)

Item	Symbol	C-2 TYPE	C-4 TYPE	Conditions / Remarks
Nominal frequency range	f _{nom}	20 kHz to 120 kHz	32 kHz to 120 kHz	Please contact us about available frequencies.
Storage temperature	T _{stg}	-20 °C to +70 °C		Storage as single product.
Operating temperature	T _{use}	-10 °C to +60 °C		
Level of drive	DL	1.0 μ W Max.		
Frequency tolerance (standard)	f _{tol}	$\pm 20 \times 10^{-6}, \pm 50 \times 10^{-6}, \pm 100 \times 10^{-6}$	$\pm 50 \times 10^{-6}, \pm 100 \times 10^{-6}$	+25 °C, DL=0.1 μ W
Turnover temperature	T _i	+25 °C $\pm$ 5 °C		
Parabolic coefficient	B	$-0.04 \times 10^{-6} / ^\circ\text{C}^2$ Max.		
Load capacitance	CL	6 pF to ∞		Please specify
Motional resistance (ESR)	R ₁	As per table below		
Motional capacitance	C ₁	4.0 fF to 0.6 fF		
Shunt capacitance	C ₀	2.0 pF to 0.6 pF		
Frequency aging	f _{age}	$\pm 5 \times 10^{-6} / \text{year}$ Max.		+25 °C, First year

Motional resistance C-2 TYPE

Frequency	20 kHz $\leq$ f _{nom} < 31.2 kHz	31.2 kHz $\leq$ f _{nom} < 40 kHz	40 kHz $\leq$ f _{nom} < 90 kHz	90 kHz $\leq$ f _{nom} $\leq$ 120 kHz
Motional resistance	55 k Ω Max.	35 k Ω Max.	20 k Ω Max.	12 k Ω Max.

Motional resistance C-4 TYPE

Frequency	32 kHz $\leq$ f _{nom} < 38 kHz	38 kHz $\leq$ f _{nom} < 60 kHz	60 kHz $\leq$ f _{nom} < 74 kHz	74 kHz $\leq$ f _{nom} $\leq$ 100 kHz	100 kHz < f _{nom} $\leq$ 120 kHz
Motional resistance	55 k Ω Max.	30 k Ω Max.	25 k Ω Max.	22 k Ω Max.	15 k Ω Max.

Product name C-002RX 32.768000kHz 12.5 +20.0-20.0

(Standard form)

① Model


② Frequency

③ Load capacitance(pF)

④ Frequency tolerance($\times 10^{-6}$, +25 °C)

External dimensions

(Unit:mm)

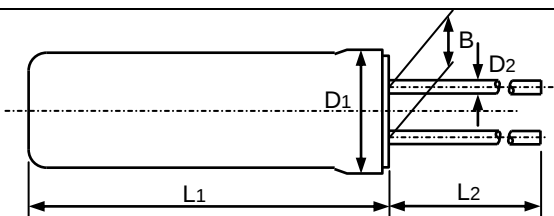

Model	L ₁	L ₂	D ₁	D ₂	B
C-002RX C-2 TYPE	6.0 Max.	4.0 Min.	ϕ 2.0 Max.	ϕ 0.2	0.7
C-004R C-4 TYPE	5.0 Max.	4.0 Min.	ϕ 1.5 Max.	ϕ 0.18	0.5
C-005R	4.6 Max.	4.0 Min.	ϕ 1.2 Max.	ϕ 0.15	0.3

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com