

### 218 Series, 5×20 mm, Time-Lag Fuse



#### Description

5×20mm Time-Lag glass body cartridge fuse designed to IEC specification.











#### Features

- Designed to International IEC Standards for use globally
- Meets the IEC 60127-2, Sheet 3 specification for Time-Lag fuses
- Available in cartridge and axial lead form
- RoHS compliant and lead-free

#### Applications

Used as supplementary protection in appliance or utilization equipment to provide individual protection for components or internal circuits.

#### Agency Approvals

| Agency  | Agency File Number                                   | Ampere Range                                   |
|---|--|--|
|    | Cartridge:<br>NBK090205-E10480A<br>NBK120802-E10480C | 1A – 5A<br>6.3A – 15A                          |
|   | Leaded:<br>NBK090205-E10480B<br>NBK120802-E10480D    | 1A – 5A<br>6.3A – 15A                          |
|    | 2005010207145715                                     | 0.032A – 6.3A                                  |
|   | SU05001-3005<br>SU05001-2008<br>SU05001-2009         | 0.032A – 0.040A<br>0.050A – 0.800A<br>1A – 10A |
|  | E10480   | 0.032A – 16A                                   |
|  | 29862  | 0.032A-10A;15A                                 |
|  | 1402476  | 0.032A – 6.3A                                  |
|  | 40013496   | 0.032A – 10A                                   |
|  | 40016604   | 15A*   |
|  | KM41462  | 0.080A – 6.3A                                  |
|  | N/A  | 0.032A – 16A                                   |

\* Approval for Cartridge versions only

#### Additional Information



Datasheet



Resources



Samples



Accessories

For recommended fuse accessories for this product series, see '[Recommended Accessories](#)' section.

#### Electrical Characteristics

| % of Ampere Rating | Ampere Rating | Opening Time                |
|--------------------|---------------|-----------------------------|
| 150%               | 0.032A-0.100A | 60 minutes, Minimum         |
|                    | 0.125A-6.3A   | 60 minutes, Minimum         |
|                    | 8A-15A        | 30 minutes, Minimum         |
| 210%               | 0.032A-0.100A | 120 sec., Maximum           |
|                    | 0.125A-6.3A   | 120 sec., Maximum           |
|                    | 8A-16A        | 120 sec., Maximum           |
| 275%               | 0.032A-0.100A | 200 ms., Min.; 10 sec. Max. |
|                    | 0.125A-6.3A   | 600 ms., Min.; 10 sec. Max. |
|                    | 8A-16A        | 600 ms., Min.; 10 sec. Max. |
| 400%               | 0.032A-0.100A | 40 ms., Min.; 3 sec. Max.   |
|                    | 0.125A-6.3A   | 150 ms., Min.; 3 sec. Max.  |
|                    | 8A-15A        | 150 ms., Min.; 3 sec. Max.  |
| 1000%              | 0.032A-0.100A | 10 ms., Min.; 300 ms. Max.  |
|                    | 0.125A-6.3A   | 20 ms., Min.; 300 ms. Max.  |
|                    | 8A-15A        | 20 ms., Min.; 300 ms. Max.  |

# Axial Lead & Cartridge Fuses


5x20 mm > Time-Lag > 218 Series

## Electrical Characteristics

| Amp Code | Amp Rating (A) | Voltage Rating (V) | Interrupting Rating | Nominal Cold Resistance (Ohms) | Nominal Melting I <sup>2</sup> t (A <sup>2</sup> sec) | Maximum Voltage Drop at Rated Current (mV) | Maximum Power Dissipation At 1.5I <sub>n</sub> (W) | Agency Approvals |     |      |        |    |    |    |     |   |
|----------|----------------|--------------------|---------------------|--------------------------------|---|--|--|------------------|-----|------|--------|----|----|----|-----|---|
|          |                |                    |                     |                                |   |  |  | UL               | CCC | PS E | RU     | SF | CS | CE | D'E |   |
| .032     | 0.032          | 250                | 35 A @ 250 VAC      | 48.2580                        | 0.01100   | 5000                                       | 1.6  |                  | x   | x    |        | x  | x  | x  | x   | x |
| .040     | 0.04           | 250                |                     | 31.8620                        | 0.01100   | 4000                                       | 1.6  |                  | x   | x    |        | x  | x  | x  | x   | x |
| .050     | 0.05           | 250                |                     | 21.2920                        | 0.02700   | 3500                                       | 1.6  |                  | x   | x    |        | x  | x  | x  | x   | x |
| .063     | 0.063          | 250                |                     | 14.2680                        | 0.04600   | 3000                                       | 1.6  |                  | x   | x    |        | x  | x  | x  | x   | x |
| .080     | 0.08           | 250                |                     | 9.0700                         | 0.07500   | 2500                                       | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .100     | 0.1            | 250                |                     | 6.0180                         | 0.07900   | 2000                                       | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .125     | 0.125          | 250                |                     | 4.2000                         | 0.1465  | 1900                                       | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .160     | 0.16           | 250                |                     | 3.7000                         | 0.14400   | 1500                                       | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .200     | 0.2            | 250                |                     | 1.6000                         | 0.3410  | 1300                                       | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .250     | 0.25           | 250                |                     | 1.0495                         | 0.5405  | 1100                                       | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .315     | 0.315          | 250                |                     | 0.8475                         | 1.1100  | 1000                                       | 1.6  | x                | x   | x    | 1.1100 | x  | x  | x  | x   | x |
| .400     | 0.4            | 250                |                     | 0.5350                         | 1.3250  | 900  | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .500     | 0.5            | 250                |                     | 0.3700                         | 2.8250  | 300  | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .630     | 0.63           | 250                |                     | 0.2750                         | 4.6750  | 250  | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| .800     | 0.8            | 250                |                     | 0.0813                         | 3.370   | 150  | 1.6  | x                | x   | x    |        | x  | x  | x  | x   | x |
| 001.     | 1              | 250                |                     |                                | 0.0613  | 6.730                                      | 150  | 1.6              | x   | x    | x      | x  | x  | x  | x   | x |
| 1.25     | 1.25           | 250                |                     |                                | 0.0446  | 12.650                                     | 150  | 1.6              | x   | x    | x      | x  | x  | x  | x   | x |
| 01.6     | 1.6            | 250                |                     |                                | 0.0336  | 23.350                                     | 150  | 1.6              | x   | x    | x      | x  | x  | x  | x   | x |
| 002.     | 2              | 250                |                     | 0.0293                         | 14.450  | 150  | 1.6  | x                | x   | x    | x      | x  | x  | x  | x   |   |
| 02.5     | 2.5            | 250                |                     | 0.0219                         | 23.250  | 120  | 1.6  | x                | x   | x    | x      | x  | x  | x  | x   |   |
| 3.15     | 3.15           | 250                |                     | 0.0173                         | 38.150  | 100  | 1.6  | x                | x   | x    | x      | x  | x  | x  | x   |   |
| 004.     | 4              | 250                | 40 A @ 250 VAC      | 0.0129                         | 69.10   | 100  | 1.6  | x                | x   | x    | x      | x  | x  | x  | x   |   |
| 005.     | 5              | 250                | 50 A @ 250 VAC      | 0.0104                         | 111.00  | 100  | 1.6  | x                | x   | x    | x      | x  | x  | x  | x   |   |
| 06.3     | 6.3            | 250                | 63 A @ 250 VAC      | 0.0076                         | 198.50  | 100  | 1.6  | x                | x   | x    | x      | x  | x  | x  | x   |   |
| 008.     | 8              | 250                | 80 A @ 250 VAC      | 0.0059                         | 341.50  | 100  | 4  |                  | x   |      | x      | x  | x  |    | x   |   |
| 010.     | 10             | 250                | 100 A @ 250 VAC     | 0.0045                         | 568.00  | 100  | 4  |                  | x   |      | x      | x  | x  |    | x   |   |
| 12.5     | 12.5           | 250                | 63 A @ 250 VAC      | 0.0034                         | 889.00  | 100  | 4  |                  |     |      | x      | x  |    |    | x   |   |
| 015.     | 15             | 250                | 100 A @ 250 VAC     | 0.0028                         | 1405.00   | 100  | 4  |                  |     |      | x      | x  | x  |    | x*  |   |
| 016.     | 16             | 250                | 63 A @ 250 VAC      | 0.0021                         | 1955.00   | 100  | 4  |                  |     |      |        | x  |    |    | x   |   |


\* Approval for cartridge versions only

## Temperature Re-rating Curve

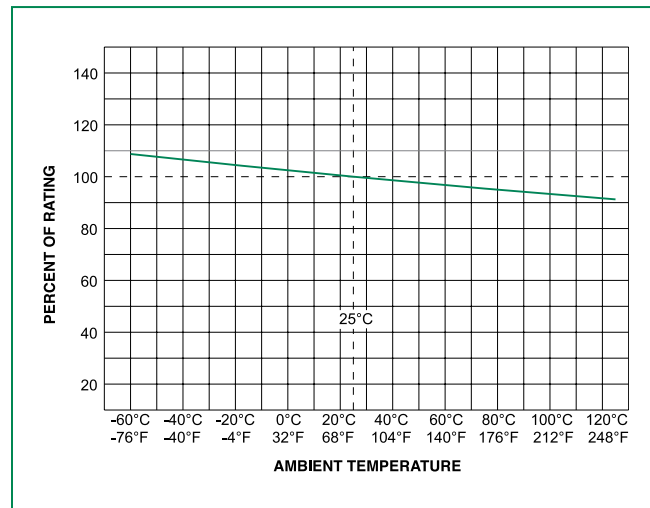


Note:  
Rerating depicted in this curve is in addition to the standard derating of 25% for continuous operation.

## Average Time Current Curves

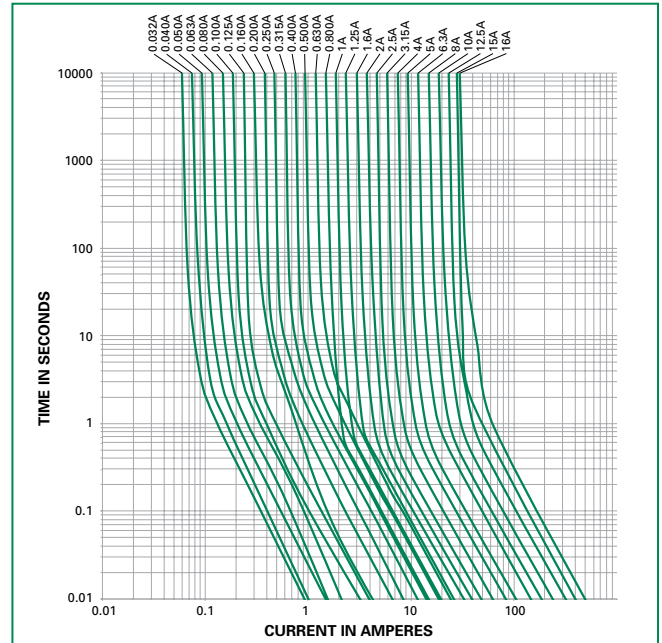

## Soldering Parameters - Wave Soldering

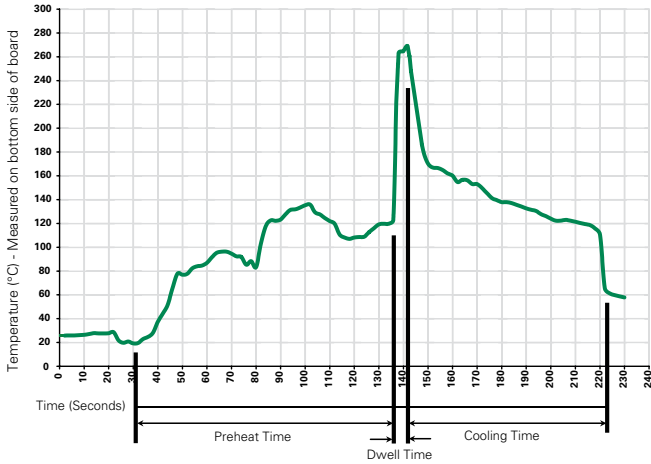

### Recommended Process Parameters:

| Wave Parameter  | Lead-Free Recommendation          |
|---|-----------------------------------|
| <b>Preheat:</b><br>(Depends on Flux Activation Temperature) | (Typical Industry Recommendation) |
| Temperature Minimum:  | 100°C                             |
| Temperature Maximum:  | 150°C                             |
| Preheat Time:   | 60-180 seconds                    |
| <b>Solder Pot Temperature:</b>                              | 260°C Maximum                     |
| <b>Solder Dwell Time:</b>                                   | 2-5 seconds                       |

### Recommended Hand-Solder Parameters:

Solder Iron Temperature: 350°C +/- 5°C  
 Heating Time: 5 seconds max.

**Note: These devices are not recommended for IR or Convection Reflow process.**

## Product Characteristics

|                          |  |
|--------------------------|--|
| <b>Material</b>          | <b>Body:</b> Glass<br><b>Cap:</b> Nickel-plated Brass<br><b>Leads:</b> Tin-plated Copper   |
| <b>Terminal Strength</b> | MIL-STD-202, Method 211, Test Condition A  |
| <b>Solderability</b>     | MIL-STD-202, Method 208  |
| <b>Product Marking</b>   | <b>Cap1:</b> Brand logo, current and voltage ratings<br><b>Cap2:</b> Agency approval marks |
| <b>Packaging</b>         | Available in Bulk (M=1000 pcs/pkg) or on Tape/Reel (MRET1=1000 pcs/reel)                   |


|                              |   |
|------------------------------|---|
| <b>Operating Temperature</b> | -55°C to +125°C   |
| <b>Thermal Shock</b>         | MIL-STD-202, Method 107, Test Condition B (5 cycles, -65°C to +125°C)                                   |
| <b>Vibration</b>             | MIL-STD-202, Method 201   |
| <b>Humidity</b>              | MIL-STD-202, Method 103, Test Condition A (High RH (95%) and elevated temperature (40°C) for 240 hours) |
| <b>Salt Spray</b>            | MIL-STD-202, Method 101, Test Condition B   |

# Axial Lead & Cartridge Fuses


5x20 mm > Time-Lag > 218 Series

## Dimensions


0218 000P



0218.032 XEP  
to  
0218.100XEP



0218.125 XEP  
to  
0218016. XEP

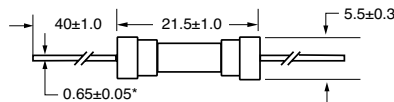


All dimensions in mm

Notes:

\* Ratings above 6.3A have 0.8±0.05 diameter lead.

## Part Numbering System

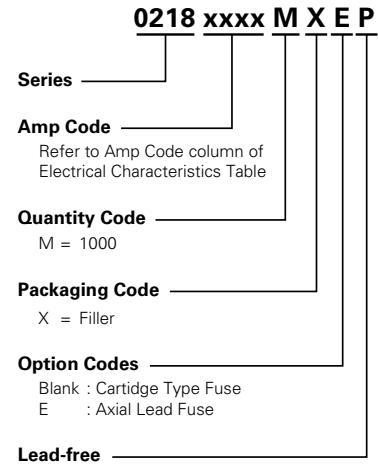

## Packaging

| Packaging Option  | Packaging Specification | Quantity | Quantity & Packaging Code | Taping Width     |
|-------------------|-------------------------|----------|---------------------------|------------------|
| <b>218 Series</b> |                         |          |                           |                  |
| Bulk              | N/A                     | 1000     | MX                        | N/A              |
| Bulk              | N/A                     | 1000     | MXE                       | N/A              |
| Reel and Tape     | EIA 296-E               | 1000     | MRET1                     | T1=53mm (2.087") |
| Bulk              | N/A                     | 1000     | MXG                       | N/A              |
| Bulk              | N/A                     | 1000     | MXB                       | N/A              |
| Bulk              | N/A                     | 100      | HX                        | N/A              |

## Recommended Accessories

| Accessory Type | Series                  | Description   | Max Application Voltage | Max Application Amperage |
|----------------|-------------------------|---|-------------------------|--------------------------|
| Holder         | <a href="#">345_ISF</a> | Panel Mount Shock-Safe Fuseholder   | 250                     | 10                       |
|                | <a href="#">345</a>     | Shock-Safe Fuseholder with PC Mount, Solder Mount and Panel Mount options |                         | 20                       |
|                | <a href="#">830</a>     | PC Mount Shock-Safe Miniature Fuseholder                                  |                         | 16                       |
| Block          | <a href="#">520</a>     | Metric OMNI-BLOK® Fuse Block  |                         | 10                       |
|                | <a href="#">646</a>     | PC Mount Miniature Fuse Block   |                         | 6.3                      |
|                | <a href="#">658</a>     | Surface Mount Miniature Fuse Block  |                         | 10                       |
| Clip           | <a href="#">520_W</a>   | PC Mount Miniature Fuse Clip  |                         | 6.3                      |
|                | <a href="#">111</a>     | PC Board Mount Fuse Clip  |                         | 10                       |
|                | <a href="#">445</a>     | PC Board Mount Fuse Clip  |                         | 10                       |

Notes:

- Do not use in applications above rating.
- Please refer to fuseholder data sheet for specific re-rating information.
- Please contact factory for applications greater than the max voltage and amperage shown.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype [ameyasales1](#) [ameyasales2](#)

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)