


TITLE	PART No.	REV	PAGE
Low Loss Microwave Coax, 24 AWG	086SC-2401	8	1 of 1

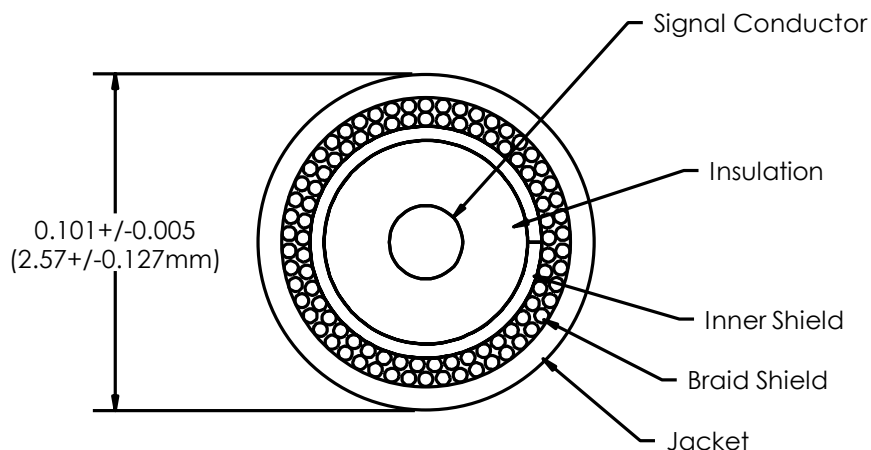

CONSTRUCTION

Signal Conductor: 0.0201" +/- 0.0002" (0.51 +/- 0.0051 mm), Silver Plated Copper per ASTM B-298
 Insulation: FEP per applicable paragraph MIL-DTL-17, 0.065" +/- 0.001" (1.65 +/- 0.0256 mm) OD
 Inner Shield: Helically Overlapped Flat Silver Plated Copper per ASTM B-298
 Braid Shield: 40 AWG Silver Plated Copper per ASTM B-298, >90% Coverage
 Overall Shield Diameter: 0.085" +/- 0.002 (2.18 +/- 0.05 mm)
 Jacket: FEP in accordance with MIL-DTL-17, Type IX
 Wall Thickness: 0.008" (0.19 mm)
 Color: Blue

ELECTRICAL

Impedance: 50 +/- 1 ohms
 Velocity Of Propagation: 70%
 Capacitance: 29 pF/ft (95 pF/m)

GENERAL

Temperature Rating: -65C to 165C
 Static Bend Radius: 0.3" (7.6 mm)
 Dynamic Bend Radius: 0.6" (15 mm)
 Weight: 13 lbs/1000ft

Patent No.: US 7,795,536 B2

Freq (GHz)	Attenuation (dB/100 ft)	Avg Power (W)
0.5	16	168
1	24	117
2	34	80
4	48	55
8	70	37
12	88	32
18	111	23



This document is the property of TEMP-FLEX. It may not be disclosed, reproduced, or otherwise used without permission.	Rev	DCR	Description	App'd	Date
	7	2832	Flat Served Shield Lay Length Change. Add Braid Shield Supplier.	KP	12/21/11
	7	2934	Add Patent # to General Notes.	KP	4/26/12
	8	2997	Change Flat Served Shield Size.	RP	7/24/12

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com