


CDSV6-4448TI-G

Reverse Voltage: 80 Volts
Forward Current: 100 mA
RoHS Device





Features

- Design for mounting on small surface.
- High speed switching.
- High mounting capability, strong surge withstand, high reliability.
- Qualified according AEC-Q101.

Mechanical data

- Case: SOT-363, molded plastic.
- Terminals: solderable per MIL-STD-750, method 2026.
- Approx. weight: 0.006 grams

Circuit diagram

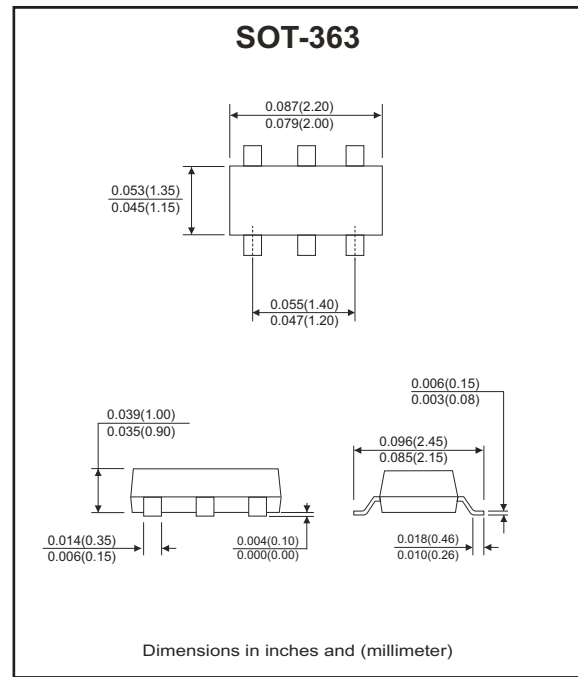

Maximum Ratings and Electrical Characteristics

(at Ta=25°C unless otherwise noted)

Parameter	Symbol	Conditions	Value	Units
Repetitive peak reverse voltage	V_{RRM}		80	V
DC blocking voltage	V_R		80	V
Forward current	I_F		100	mA
Peak surge forward current	I_{FSM}	$T=1.0 \mu S$	2	A
Power dissipation	P_D		200	mW
Maximum forward voltage	V_F	@ $I_F=1mA$ @ $I_F=10mA$ @ $I_F=100mA$	0.72 0.855 1.0	V
Maximum reverse current	I_R	@ $V_R=20V$ @ $V_R=75V$ @ $V_R=25V, T_J=150^\circ C$ @ $V_R=75V, T_J=150^\circ C$	0.025 0.1 30 50	μA
Maximum reverse recovery time	T_{rr}	$I_F = I_R = 10mA$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	4	nS
Typical diode capacitance	C_T	$V_R=6V, f=1.0MHz$	3.5	pF
Maximum junction temperature	T_J		150	$^\circ C$
Storage temperature	T_{STG}		-55 to +150	$^\circ C$

RATING AND CHARACTERISTIC CURVES (CDSV6-4448TI-G)

Fig.1 - Forward Characteristics

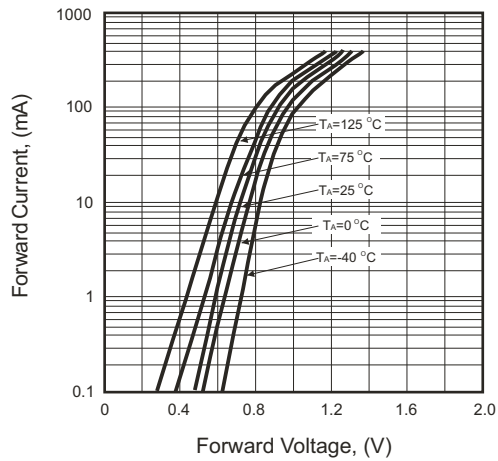


Fig.2 - Reverse Characteristics

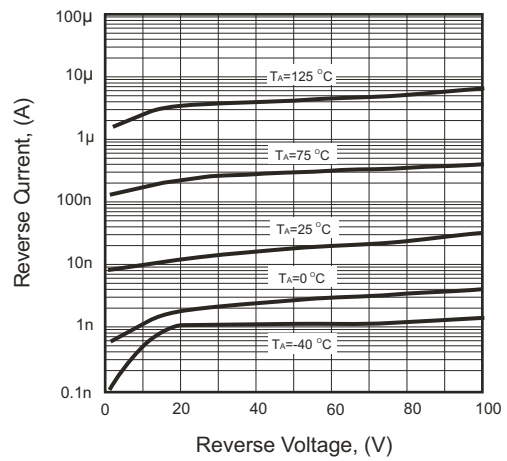


Fig.3 - Capacitance Between Terminals Characteristics






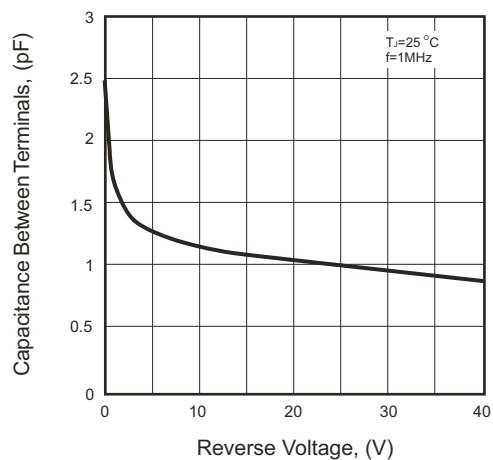


Fig.4 - Power Derating Curve

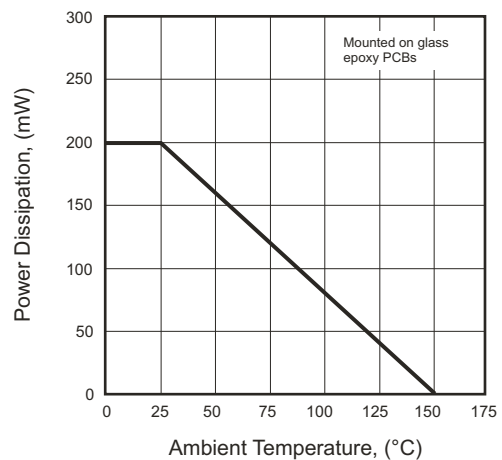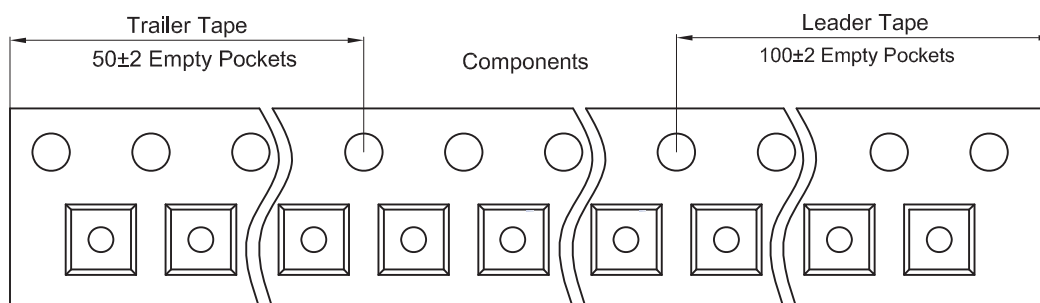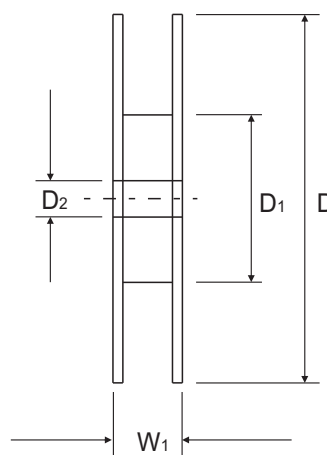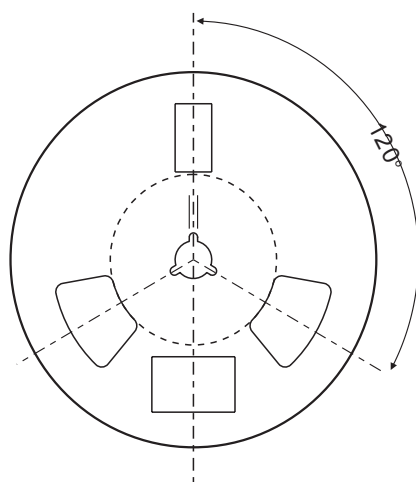

Reel Taping Specification

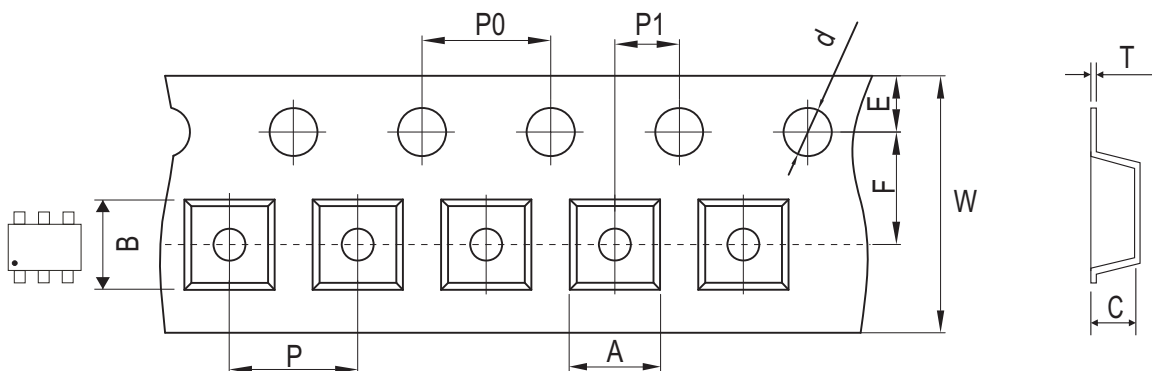


SOT-363	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	2.25 ± 0.05	2.55 ± 0.05	1.20 ± 0.05	1.50 ± 0.10	178 ± 2.00	54.40 ± 1.00	13.00 ± 1.00
	(inch)	0.089 ± 0.002	0.100 ± 0.002	0.047 ± 0.002	0.059 ± 0.004	7.008 ± 0.079	2.142 ± 0.039	0.512 ± 0.039

SOT-363	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.10	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.10	$8.00 + 0.30 / - 0.10$	12.30 ± 1.00
	(inch)	0.069 ± 0.004	0.138 ± 0.004	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.004	$0.315 + 0.012 / - 0.004$	0.484 ± 0.039

Marking Code


Part Number	Marking Code
CDSV6-4448TI-G	KAA



XXX = Product type marking code

Suggested PAD Layout

SIZE	SOT-363	
	(mm)	(inch)
A	0.40	0.016
B	0.80	0.031
C	0.65	0.026
D	1.94	0.076

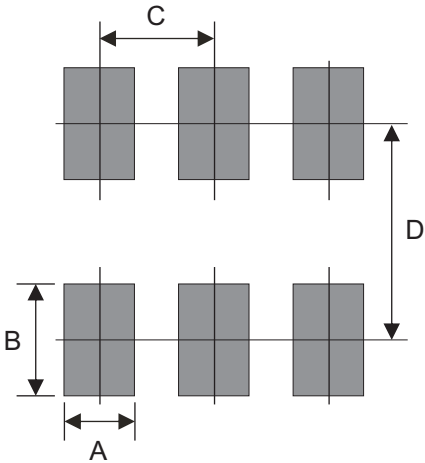

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-363	3,000	7

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com