


SPECIFICATIONS		
SILIKROME®	GRADE	
	COMMERCIAL	MILITARY
Material	Silicone Rubber ASTM D 1418	Silicone Rubber conforming toA-A-59588 Class II GR 50
Temperature Range	-112°F to +400°F (-80°C to +204°C)	-160°F to +450°F (-106°C to +260°C)
	-112°F to +575°F (-80°C to +302°C)	
Shelf Life	25 Years (minimum)	
Resistant to	Salt spray, sunlight, ozone, cleaning solutions, and most acids	
Physical Characteristics	Flexible, non-breakable, re-usable. Acts as shock mount. Protects against shattering. Easy to mount.	

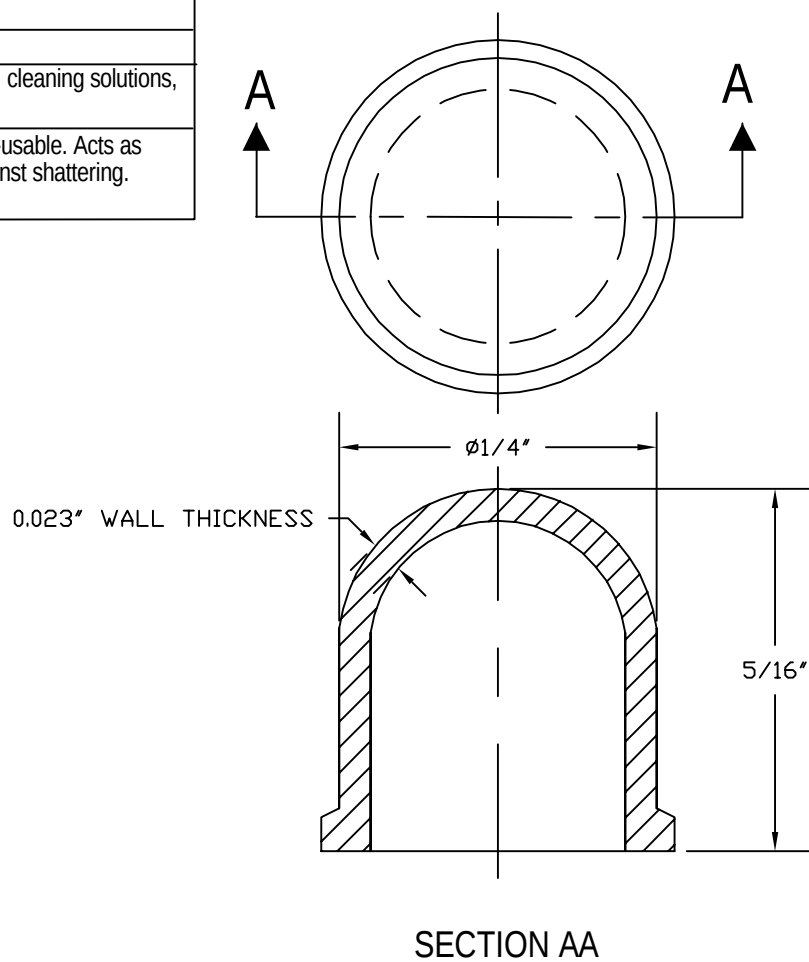

NOTE:
ALL DIMENSIONS ARE
REFERENCE ONLY

B	REDRAWN and MAT'L CHANGED		S. GOK	05.28.09
A	CAD COMPUTER GENERATED			01.10.03
REV.	DESCRIPTION			DATE
MAXIMUM AND MINIMUM MEASUREMENTS ARE STATED DIRECTLY ON EACH DIMENSION.	SILIKROMES® COLORED FILTERS FOR INCANDESCENT T-1 3/4 LAMPS	ENG.	S. GOK	05.28.09
		DWN.	ED	09.26.62
		CHKD.	J. CELLA	05.28.09
MAT'L: SEE ABOVE	APM-HEXSEAL CORPORATION	SCALE 6 : 1	DWG. NO. 1813/2	
COLOR: SPECIFY				

THIS DRAWING COVERS PROPRIETARY ITEM AND IS THE PROPERTY OF THE APM-HEXSEAL CORPORATION.
THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE WRITTEN APPROVAL OF AN OFFICER OF THE APM-HEXSEAL CORPORATION.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com