



# Glow Core



## No-Clean Cored Wire Solder

### Features:

- Excellent Wetting
- Wide Process Window
- Cleanable with Saponifier
- Lead-Free Compatible

### Description:

Glow Core is a no-clean, resin-based flux cored wire solder designed to offer excellent wetting characteristics and lead-free compatibility. This product is very active and is recommended for fast cycle time soldering. Glow Core flux promotes good thermal transfer, offering better solder penetration into plated through holes or surface mount interconnections. Glow Core cored wire produces low-to-medium post-process residues that are electrically safe and do not require cleaning for most applications.

### Availability:

- Glow Core is standard with a 2.0% flux core for tin-lead (2.5% flux core for lead-free) alloys.
- Glow Core is available in Sn/Pb, Sn/Ag/Cu, SN100C<sup>®</sup> alloys.
- Standard spool sizes: ½ lb. for .010 and .015 diameters, and 1lb. for .020, .032, .040, .050 and .062 diameters.
- Packaging of ½ lb. and 1 lb. spools is available in 12 lb. and 24 lb. cases.
- Other flux percentages, alloys, diameters and spool sizes may be available upon special request.

### Application:

- Solder iron tip temperature should be between 350° - 400°C (650° - 750°F ) for Sn63, Sn62 and Sn60 alloys, 370° - 425°C (700° - 800°F) for SN100C<sup>®</sup>, Sn/Ag and Sn/Ag/Cu (SAC305, SAC405, CASTIN, etc.) alloys.
- Hold the solder iron tip at a 45° to 60° angle to the work surface.
- The solder iron should contact both the component lead and PCB pad surface.
- Solder and flux should flow onto the lead and pad or lead and barrel to promote optimum flux activity for the joint being worked.
- If additional flux is needed, the use of AIM's NC266-3 flux is recommended. Operators should use an applicator capable of dispensing precise amounts of flux to eliminate over-saturation and excessive spread.

### Cleaning:

Glow Core can be cleaned with saponified tap water or an alcohol and water blend. AIMTERGE 520 is recommended. A water temperature of 60°C (140°F) is recommended, and should be adequate for removing any post process residues.

### Handling and Storage:

- Glow Core cored wire has an indefinite shelf life when proper storage conditions are observed.
- Store Glow Core in a clean, dry area away from moisture and sunlight.
- Do not freeze this product.

### Safety:

- Use with adequate ventilation and proper personal protective equipment.
- Refer to the accompanying MSDS for any specific emergency information.
- Do not dispose of any hazardous materials in non-approved containers.

### Classification:

| Parameter | Value |
|-----------|-------|
| J-STD-004 | RELO  |

## Surface Insulation Resistance:

### General References

AIM Glowcore S Series cored wire solder was tested to J-STD-004 and IPC-TM-650 method 2.6.3.7, Surface Insulation Resistance.

### Sample and Instrumentation

Cored Wire Solder: Glowcore S Series

Test Board: IPC-B-24, bare copper

Environmental Chamber: Thermotron SE-300

Electrical Testing Equipment: AUTO SIR Test System

### Test Condition

Temperature/Humidity: 40°C/ 90%RH

Test/Bias Voltage: 10V

Test Duration: 7 days, 10080 minutes in total, tested every 20 minutes

### Pass-Fail Criteria

IPC J-STD-004B §3.4.1.4.1

All measurements on all test patterns shall be exceed the 100 MΩ


No evidence of electrochemical migration that reduces conductor spacing by more than 20%

No corrosion of the conductors

### Test Results

|  |      |
|--|------|
| Test Data (see chart)                        | PASS |
| Presence of Dendrites                        | NO   |
| Maximum Percent Reduction of Spacing         | 0%   |
| Presence of Discoloration Between Conductors | NO   |
| Presence of Water Spots                      | NO   |
| Presence of Subsurface Metal Migration       | NO   |

### Result Chart:

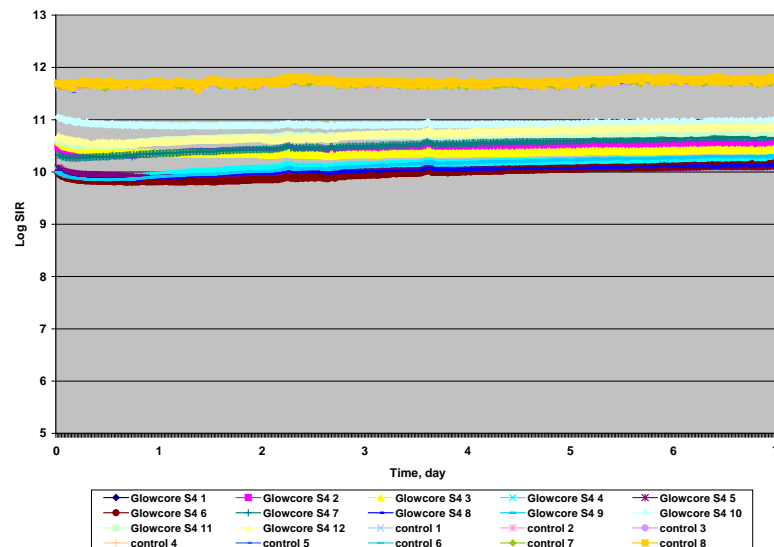

Canada +1-514-494-2000 · USA +1-401-463-5605 · Mexico +52-656-630-0032 · Europe +44-1737-222-258

Asia-Pacific +86-755-2993-6487 · India +91-80-41554753 · [info@aimsolder.com](mailto:info@aimsolder.com) · [www.aimsolder.com](http://www.aimsolder.com)

AIM IS ISO9001:2008 CERTIFIED

The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. All information pertaining to solder paste is produced with 45-micron powder. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to <http://www.aimsolder.com/Home/TermsConditions.aspx> to review AIM's terms and conditions.

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com