


# 1200V XPT™ IGBT GenX3™ w/ Diode

## IXYJ20N120C3D1


(Electrically Isolated Tab)

High-Speed IGBT  
for 20-50 kHz Switching



$$\begin{aligned} V_{CES} &= 1200V \\ I_{C110} &= 9A \\ V_{CE(sat)} &\leq 3.4V \\ t_{fi(typ)} &= 108ns \end{aligned}$$

ISO TO-247™  
E153432



G = Gate      C = Collector  
E = Emitter

| Symbol                        | Test Conditions                                                                      | Maximum Ratings                          |                  |
|-------------------------------|--------------------------------------------------------------------------------------|------------------------------------------|------------------|
| $V_{CES}$                     | $T_J = 25^\circ\text{C to } 150^\circ\text{C}$                                       | 1200                                     | V                |
| $V_{CGR}$                     | $T_J = 25^\circ\text{C to } 150^\circ\text{C}, R_{GE} = 1M\Omega$                    | 1200                                     | V                |
| $V_{GES}$                     | Continuous                                                                           | $\pm 20$                                 | V                |
| $V_{GEM}$                     | Transient                                                                            | $\pm 30$                                 | V                |
| $I_{C25}$                     | $T_C = 25^\circ\text{C}$                                                             | 21                                       | A                |
| $I_{C110}$                    | $T_C = 110^\circ\text{C}$                                                            | 9                                        | A                |
| $I_{F110}$                    | $T_C = 110^\circ\text{C}$                                                            | 15                                       | A                |
| $I_{CM}$                      | $T_C = 25^\circ\text{C}, 1\text{ms}$                                                 | 84                                       | A                |
| $I_A$                         | $T_C = 25^\circ\text{C}$                                                             | 10                                       | A                |
| $E_{AS}$                      | $T_C = 25^\circ\text{C}$                                                             | 400                                      | mJ               |
| <b>SSOA</b><br><b>(RBSOA)</b> | $V_{GE} = 15V, T_{VJ} = 150^\circ\text{C}, R_G = 10\Omega$<br>Clamped Inductive Load | $I_{CM} = 40$<br>$@ V_{CE} \leq V_{CES}$ | A                |
| $P_C$                         | $T_C = 25^\circ\text{C}$                                                             | 105                                      | W                |
| $T_J$                         |                                                                                      | -55 ... +150                             | $^\circ\text{C}$ |
| $T_{JM}$                      |                                                                                      | 150                                      | $^\circ\text{C}$ |
| $T_{stg}$                     |                                                                                      | -55 ... +150                             | $^\circ\text{C}$ |
| $T_L$                         | Maximum Lead Temperature for Soldering                                               | 300                                      | $^\circ\text{C}$ |
| $T_{SOLD}$                    | 1.6 mm (0.062in.) from Case for 10s                                                  | 260                                      | $^\circ\text{C}$ |
| $M_d$                         | Mounting Torque                                                                      | 1.13/10                                  | Nm/lb.in.        |
| $V_{ISOL}$                    | 50/60 Hz, RM, t = 1min                                                               | 2500                                     | V~               |
| <b>Weight</b>                 |                                                                                      | 5                                        | g                |

### Features

- Optimized for Low Switching Losses
- Silicon Chip on Direct-Copper Bond (DCB) Substrate
- Isolated Mounting Surface
- 2500V~ Electrical Isolation
- Square RBSOA
- Positive Thermal Coefficient of  $V_{ce(sat)}$
- Anti-Parallel Ultra Fast Diode
- Avalanche Rated

### Advantages

- High Power Density
- Low Gate Drive Requirement

### Applications

- High Frequency Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts

| Symbol        | Test Conditions<br>( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified) | Characteristic Values |      |                                       |
|---------------|-----------------------------------------------------------------------------|-----------------------|------|---------------------------------------|
|               |                                                                             | Min.                  | Typ. | Max.                                  |
| $BV_{CES}$    | $I_C = 250\mu\text{A}, V_{GE} = 0V$                                         | 1200                  |      | V                                     |
| $V_{GE(th)}$  | $I_C = 250\mu\text{A}, V_{CE} = V_{GE}$                                     | 3.0                   |      | 5.0 V                                 |
| $I_{CES}$     | $V_{CE} = V_{CES}, V_{GE} = 0V$<br>$T_J = 125^\circ\text{C}$                |                       |      | 25 $\mu\text{A}$<br>350 $\mu\text{A}$ |
| $I_{GES}$     | $V_{CE} = 0V, V_{GE} = \pm 20V$                                             |                       |      | $\pm 100$ nA                          |
| $V_{CE(sat)}$ | $I_C = 20A, V_{GE} = 15V$ , Note 1<br>$T_J = 150^\circ\text{C}$             |                       | 4.0  | 3.4 V<br>V                            |

## Symbol Test Conditions

( $T_J = 25^\circ\text{C}$  Unless Otherwise Specified)

## Characteristic Values

| Symbol       | Test Conditions                                                                                                                                                        | Min. | Typ. | Max.                    |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------------------------|
| $g_{fs}$     | $I_C = 20\text{A}$ , $V_{CE} = 10\text{V}$ , Note 1                                                                                                                    | 7.0  | 11.5 | S                       |
| $C_{ies}$    | $V_{CE} = 25\text{V}$ , $V_{GE} = 0\text{V}$ , $f = 1\text{MHz}$                                                                                                       |      | 1110 | pF                      |
| $C_{oes}$    |                                                                                                                                                                        |      | 120  | pF                      |
| $C_{res}$    |                                                                                                                                                                        |      | 27   | pF                      |
| $Q_{g(on)}$  | $I_C = 20\text{A}$ , $V_{GE} = 15\text{V}$ , $V_{CE} = 0.5 \cdot V_{CES}$                                                                                              |      | 53   | nC                      |
| $Q_{ge}$     |                                                                                                                                                                        |      | 9    | nC                      |
| $Q_{gc}$     |                                                                                                                                                                        |      | 22   | nC                      |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 25^\circ\text{C}</math></b><br>$I_C = 20\text{A}$ , $V_{GE} = 15\text{V}$<br>$V_{CE} = 0.5 \cdot V_{CES}$ , $R_G = 10\Omega$<br>Note 2  |      | 20   | ns                      |
| $t_{ri}$     |                                                                                                                                                                        |      | 29   | ns                      |
| $E_{on}$     |                                                                                                                                                                        |      | 1.3  | mJ                      |
| $t_{d(off)}$ |                                                                                                                                                                        |      | 90   | ns                      |
| $t_{fi}$     |                                                                                                                                                                        |      | 108  | ns                      |
| $E_{off}$    |                                                                                                                                                                        |      | 0.5  | mJ                      |
| $t_{d(on)}$  | <b>Inductive load, <math>T_J = 150^\circ\text{C}</math></b><br>$I_C = 20\text{A}$ , $V_{GE} = 15\text{V}$<br>$V_{CE} = 0.5 \cdot V_{CES}$ , $R_G = 10\Omega$<br>Note 2 |      | 20   | ns                      |
| $t_{ri}$     |                                                                                                                                                                        |      | 40   | ns                      |
| $E_{on}$     |                                                                                                                                                                        |      | 3.7  | mJ                      |
| $t_{d(off)}$ |                                                                                                                                                                        |      | 115  | ns                      |
| $t_{fi}$     |                                                                                                                                                                        |      | 105  | ns                      |
| $E_{off}$    |                                                                                                                                                                        |      | 0.7  | mJ                      |
| $R_{thJC}$   |                                                                                                                                                                        |      |      | 1.19 $^\circ\text{C/W}$ |
| $R_{thCS}$   |                                                                                                                                                                        | 0.15 |      | $^\circ\text{C/W}$      |

## Reverse Diode (FRED)


( $T_J = 25^\circ\text{C}$ , Unless Otherwise Specified)

| Symbol     | Test Conditions                                                                                                                                                  | Min. | Typ. | Max.                    |
|------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-------------------------|
| $V_F$      | $I_F = 30\text{A}$ , $V_{GE} = 0\text{V}$ , Note 1<br>$T_J = 150^\circ\text{C}$                                                                                  |      | 1.75 | 3.00 V                  |
| $I_{RM}$   | $I_F = 30\text{A}$ , $V_{GE} = 0\text{V}$ , $-di_F/dt = 100\text{A}/\mu\text{s}$ , $T_J = 100^\circ\text{C}$<br>$V_R = 600\text{V}$<br>$T_J = 100^\circ\text{C}$ |      | 195  | 9 A                     |
| $t_{rr}$   |                                                                                                                                                                  |      |      | ns                      |
| $R_{thJC}$ |                                                                                                                                                                  |      |      | 1.25 $^\circ\text{C/W}$ |

## Notes:

- Pulse test,  $t \leq 300\mu\text{s}$ , duty cycle,  $d \leq 2\%$ .
- Switching times & energy losses may increase for higher  $V_{CE}(\text{clamp})$ ,  $T_J$  or  $R_G$ .







## ISO TO-247 (IXYJ) OUTLINE

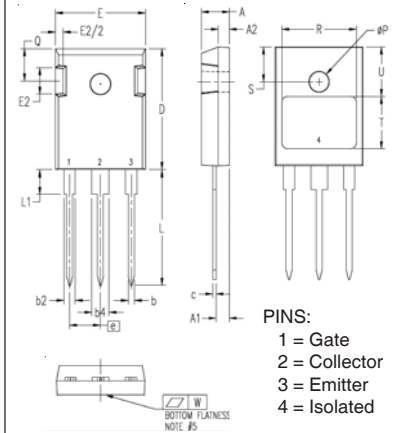


| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .190     | .205 | 4.83        | 5.21  |
| A1  | .087     | .100 | 2.21        | 2.54  |
| A2  | .075     | .085 | 1.91        | 2.16  |
| b   | .045     | .055 | 1.14        | 1.40  |
| b2  | .075     | .085 | 1.91        | 2.16  |
| b4  | .115     | .126 | 2.92        | 3.20  |
| c   | .023     | .033 | 0.58        | 0.84  |
| D   | .820     | .840 | 20.83       | 21.34 |
| E   | .620     | .635 | 15.75       | 16.13 |
| E2  | .175     | .195 | 4.44        | 4.95  |
| e   | .215 BSC |      | 5.45 BSC    |       |
| L   | .780     | .810 | 19.81       | 20.57 |
| L1  | .160     | .177 | 4.06        | 4.50  |
| Q   | .220     | .240 | 5.59        | 6.10  |
| R   | .520     | .540 | 13.21       | 13.72 |
| S   | .242 BSC |      | 6.15 BSC    |       |
| T   | .355     | .375 | 9.02        | 9.53  |
| U   | .345     | .370 | 8.76        | 9.40  |
| ØP  | .140     | .144 | 3.55        | 3.66  |
| W   | .000     | .004 | 0.00        | 0.10  |

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.


|                                                                                  |           |           |           |           |              |              |              |              |              |             |
|----------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|--------------|-------------|
| IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: | 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    | 7,005,734 B2 | 7,157,338B2 |
|                                                                                  | 4,860,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    | 7,063,975 B2 |             |
|                                                                                  | 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 | 7,071,537    |             |

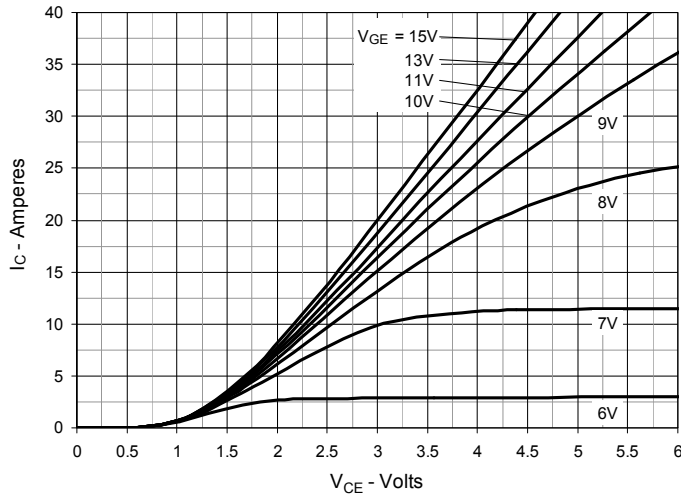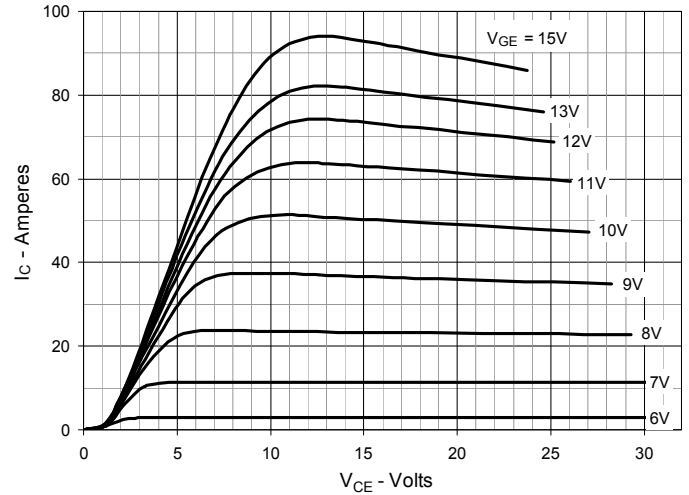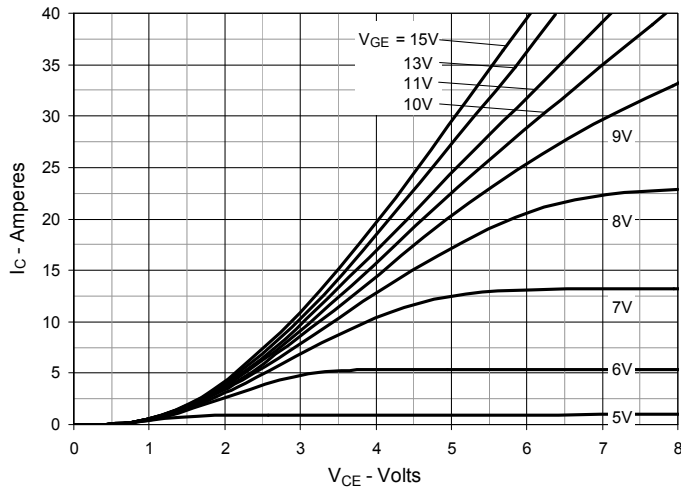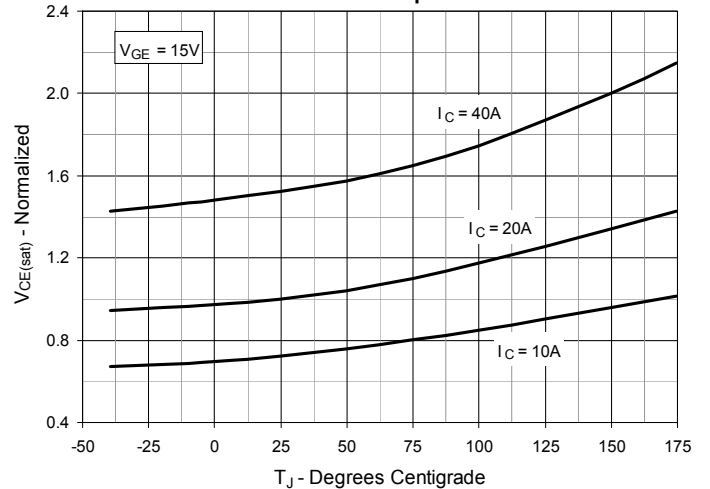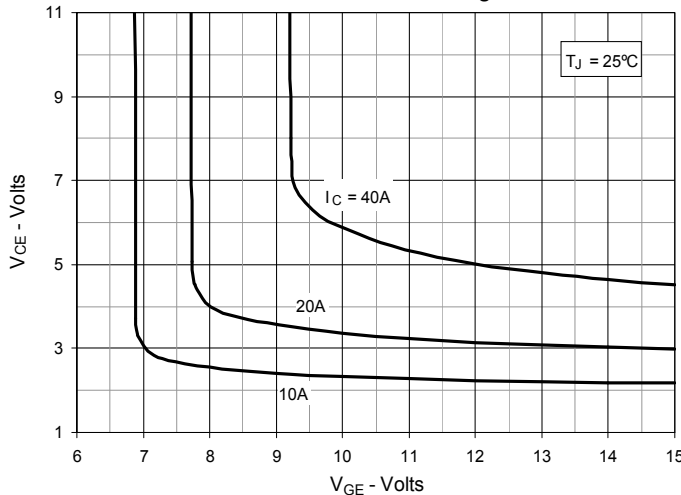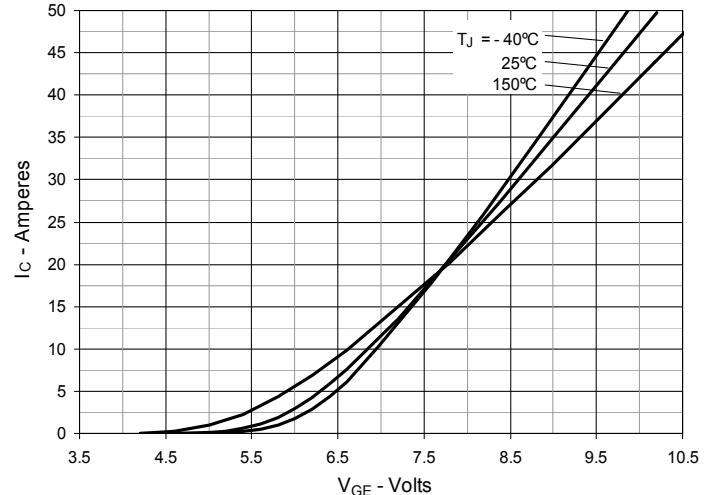**Fig. 1. Output Characteristics @  $T_J = 25^\circ\text{C}$** 

**Fig. 2. Extended Output Characteristics @  $T_J = 25^\circ\text{C}$** 

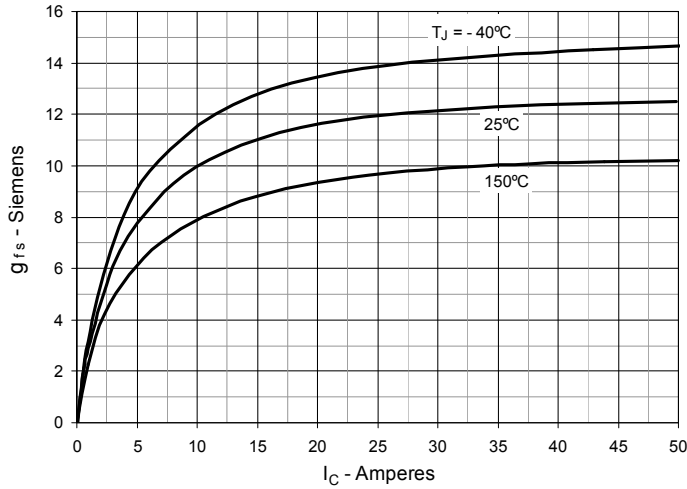**Fig. 3. Output Characteristics @  $T_J = 150^\circ\text{C}$** 

**Fig. 4. Dependence of  $V_{CE(sat)}$  on Junction Temperature**

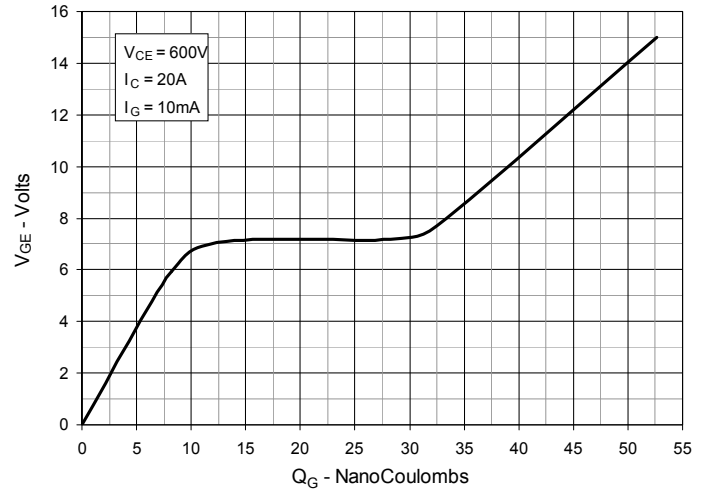**Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage**

**Fig. 6. Input Admittance**


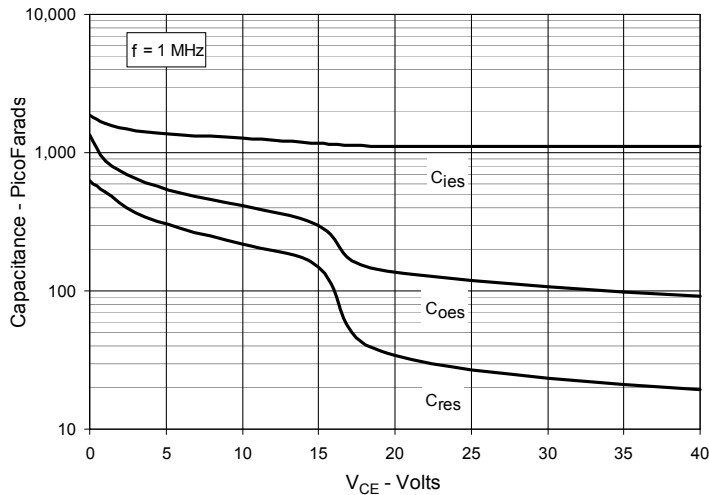
**Fig. 7. Transconductance**




**Fig. 8. Gate Charge**




**Fig. 9. Capacitance**




**Fig. 10. Reverse-Bias Safe Operating Area**

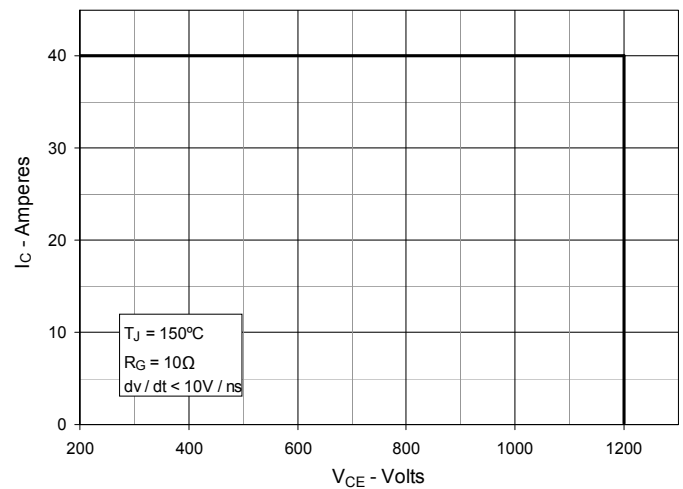


**Fig. 11. Maximum Transient Thermal Impedance (IGBT)**

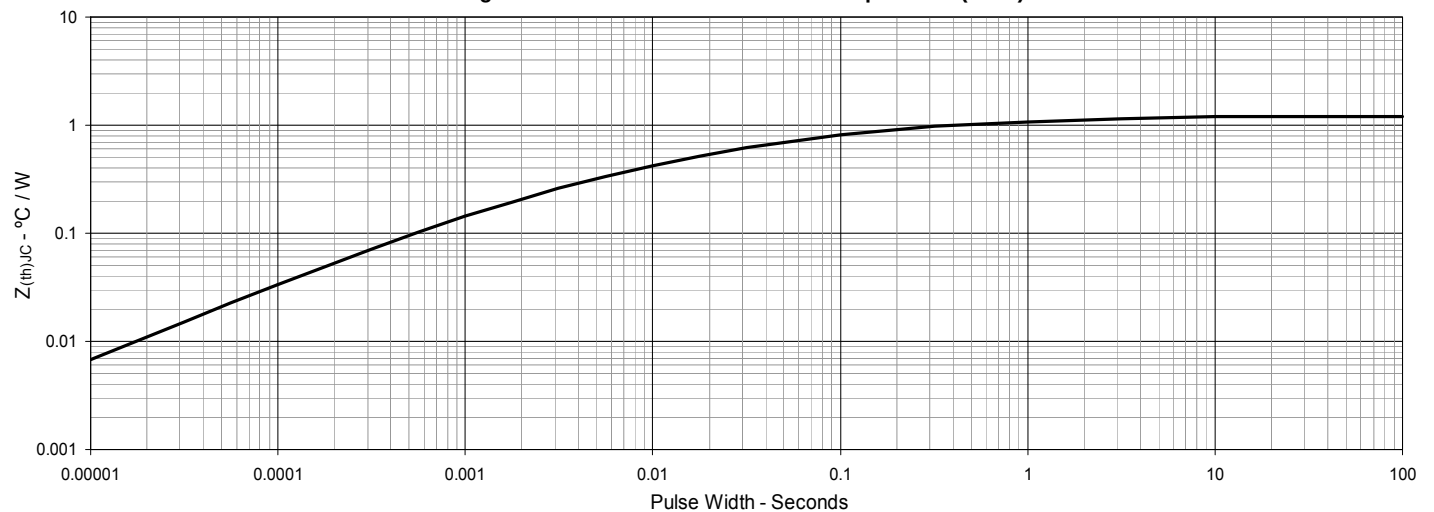


**Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance**

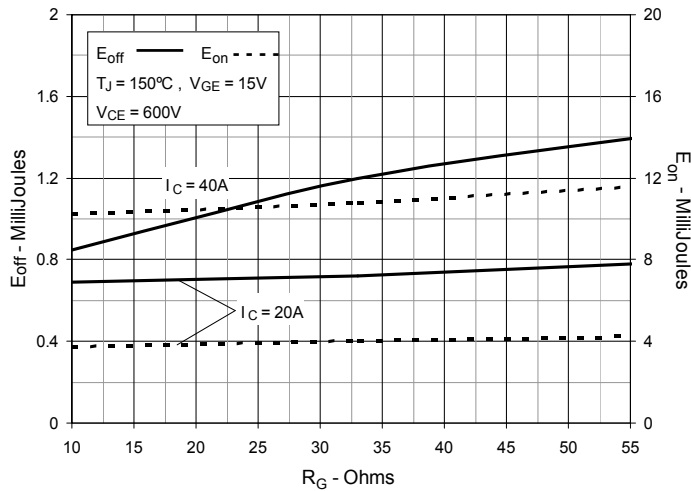


**Fig. 13. Inductive Switching Energy Loss vs. Collector Current**

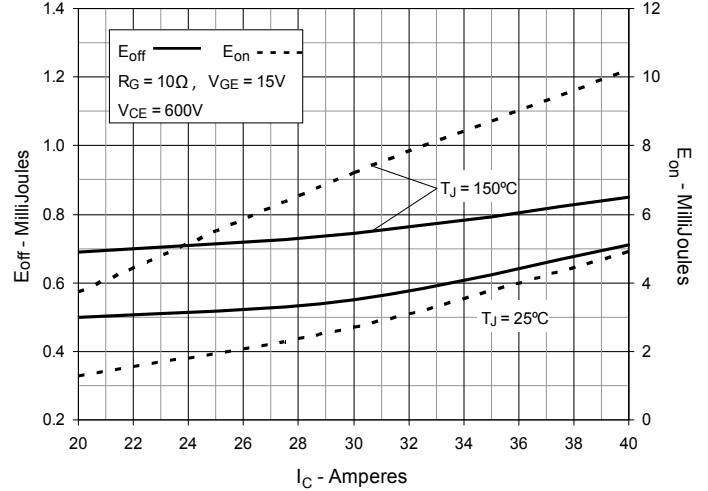


**Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature**

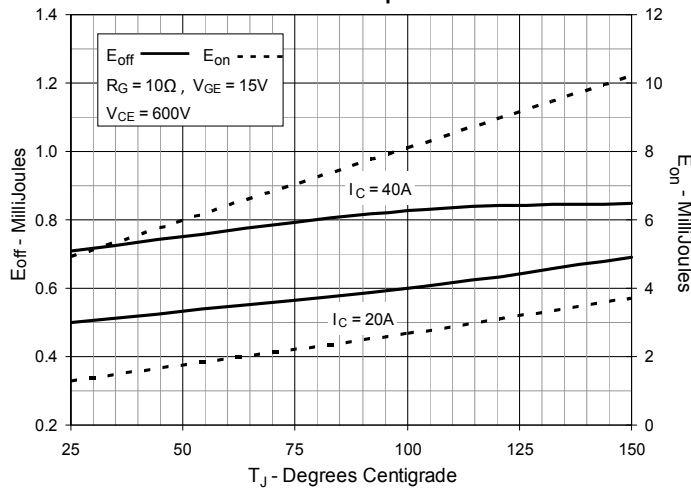


**Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance**

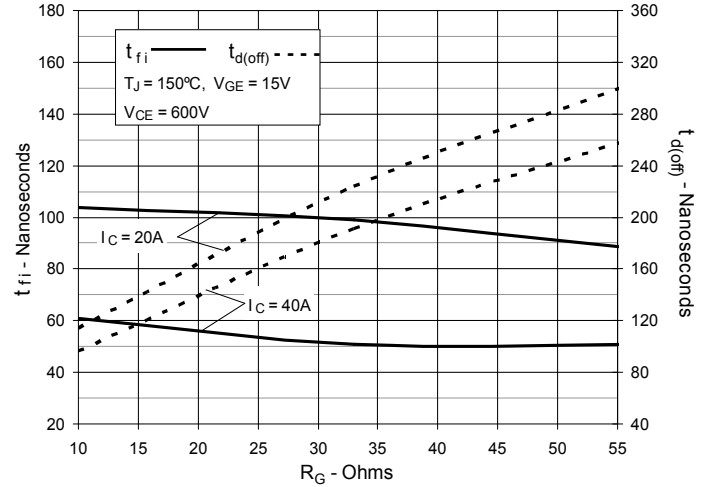


**Fig. 16. Inductive Turn-off Switching Times vs. Collector Current**

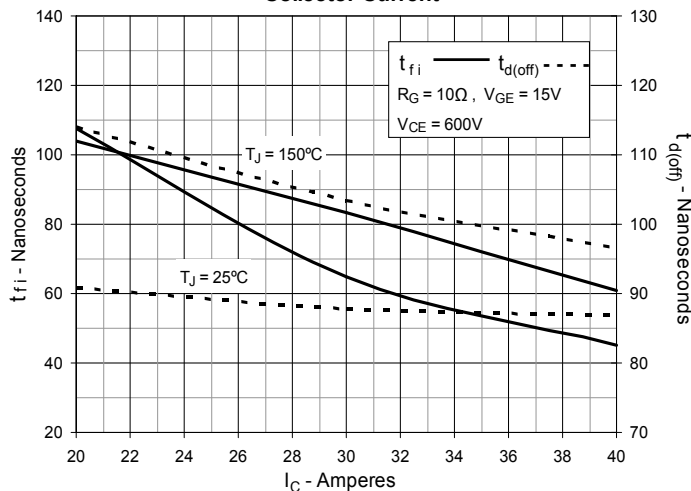


**Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature**

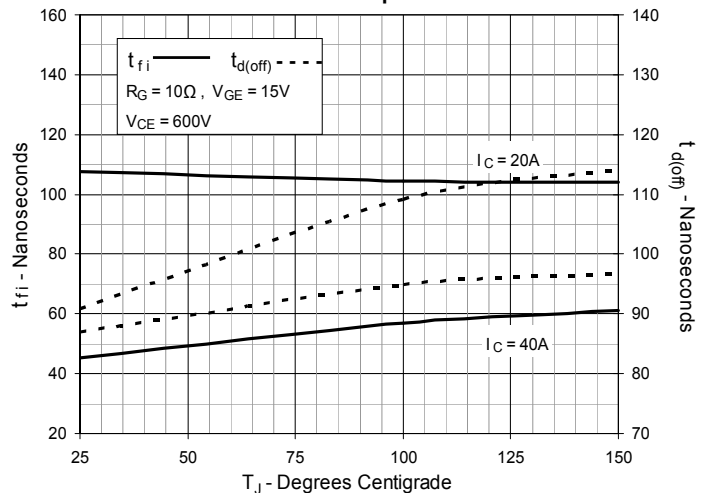


**Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance**

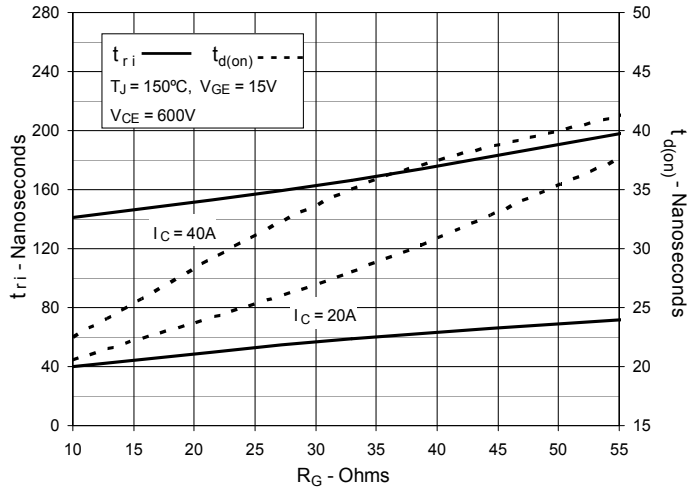


**Fig. 19. Inductive Turn-on Switching Times vs. Collector Current**

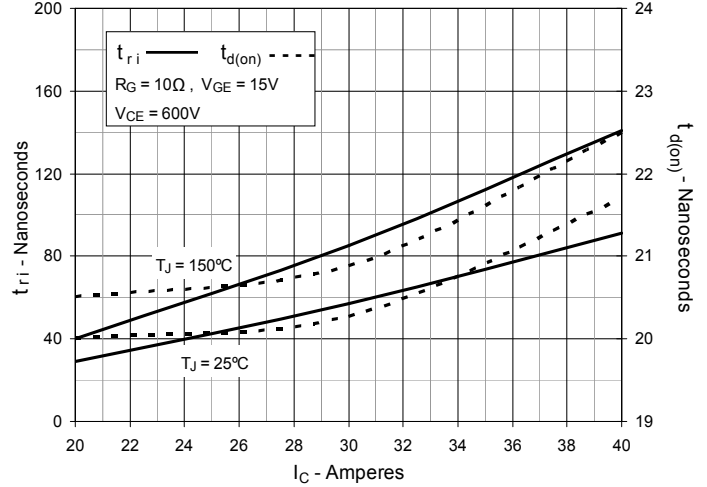


**Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature**






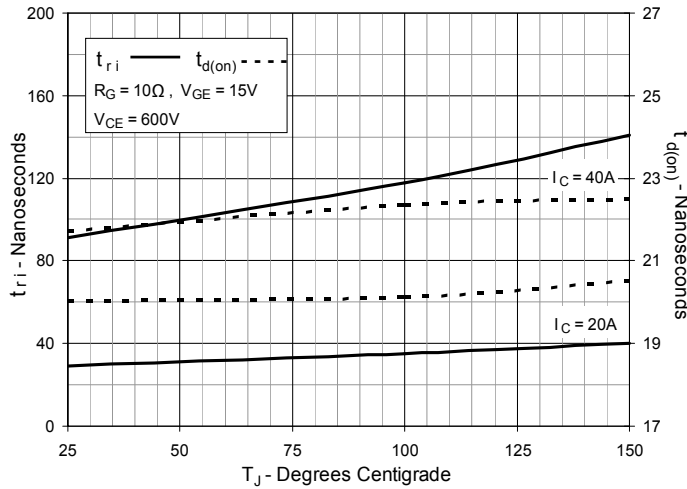


**Fig. 21. Maximum Peak Load Current vs. Frequency**

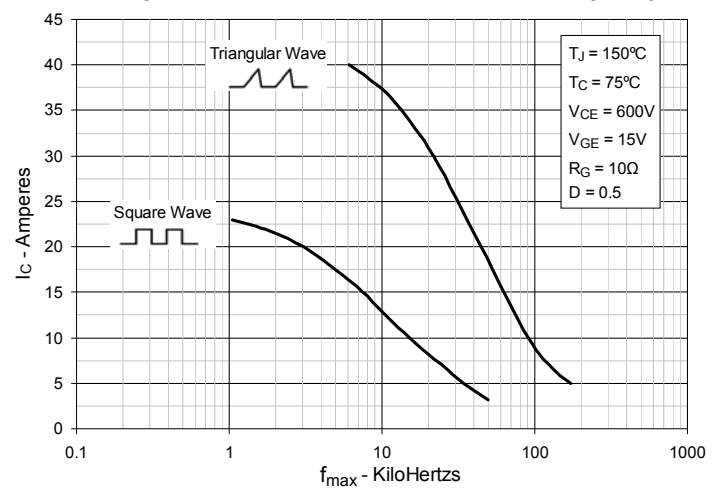

**Fig. 22. Maximum Transient Thermal Impedance (Diode)**

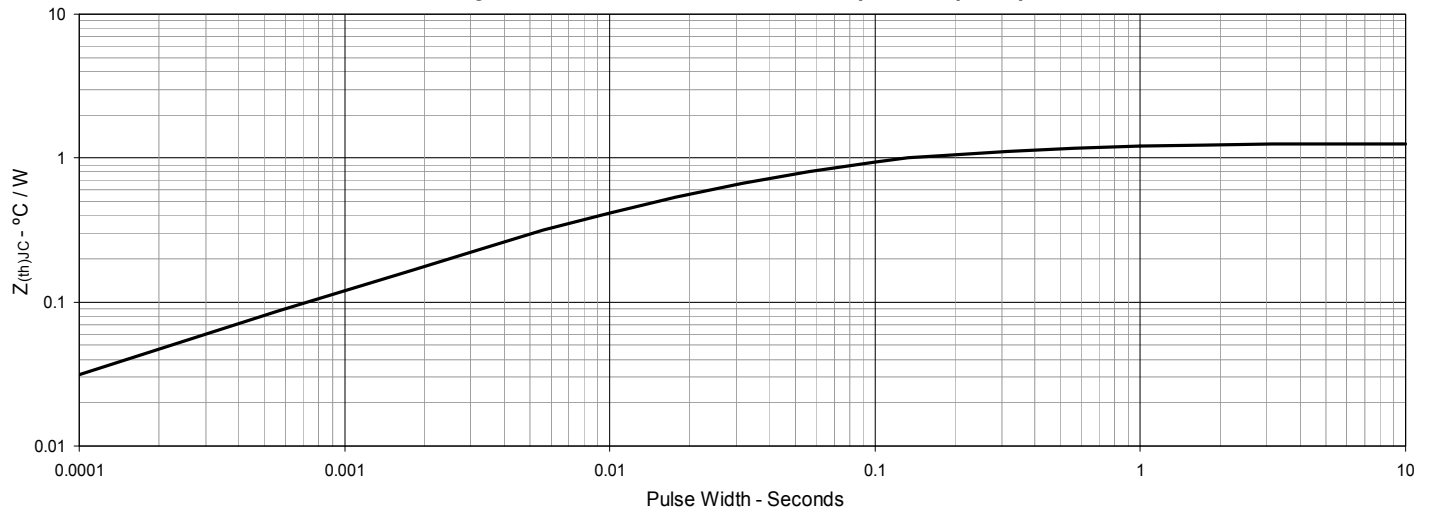

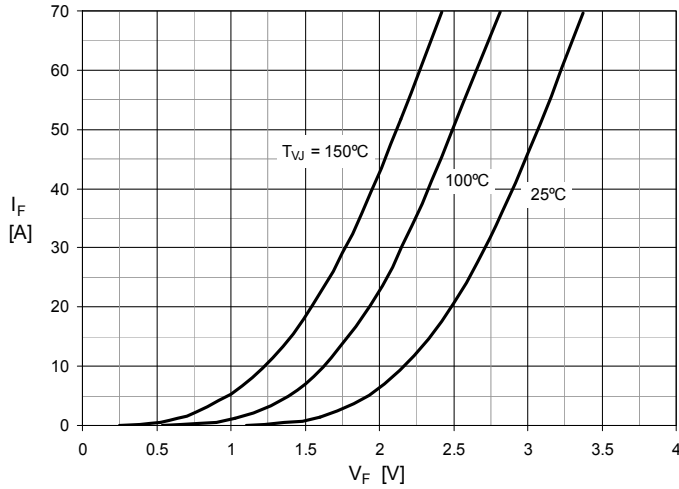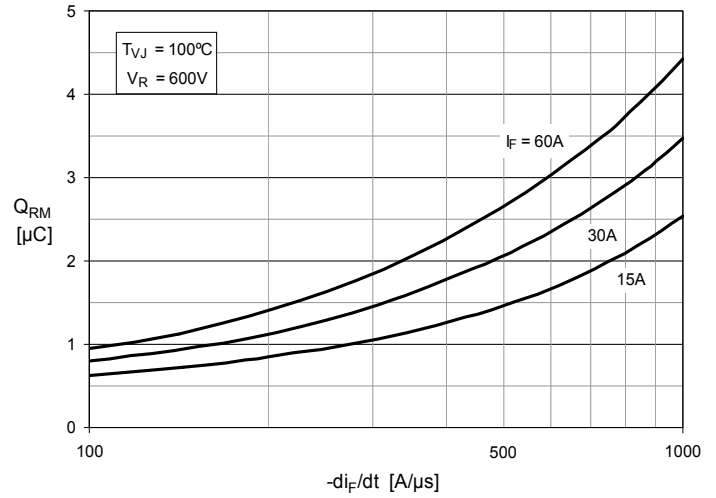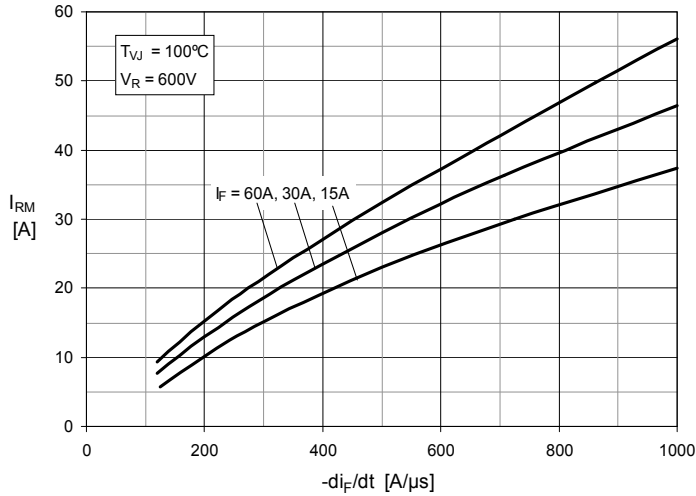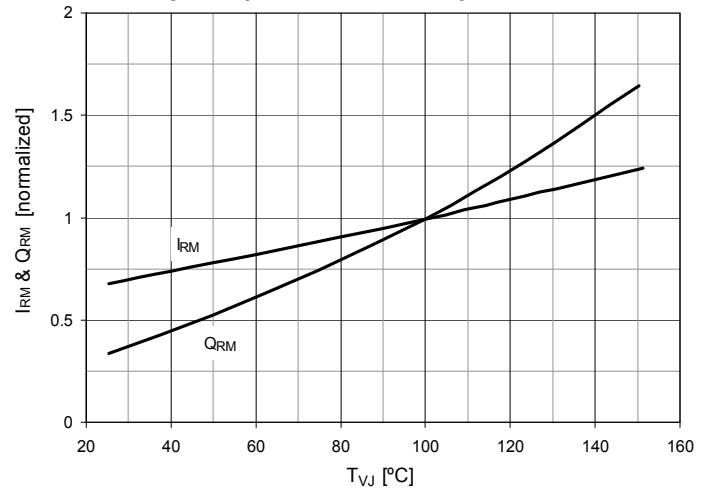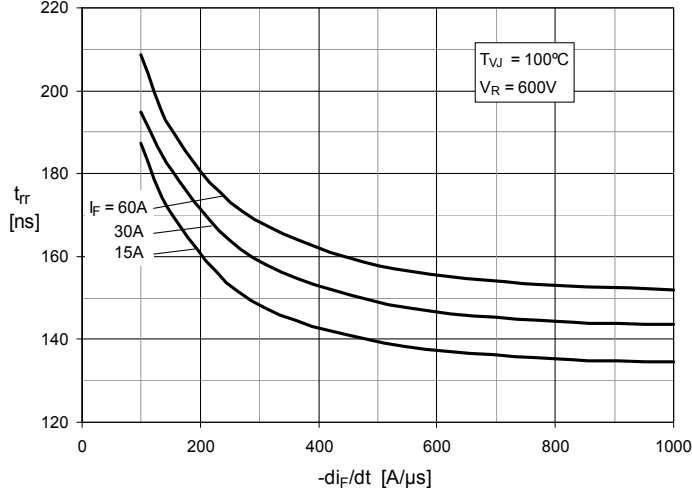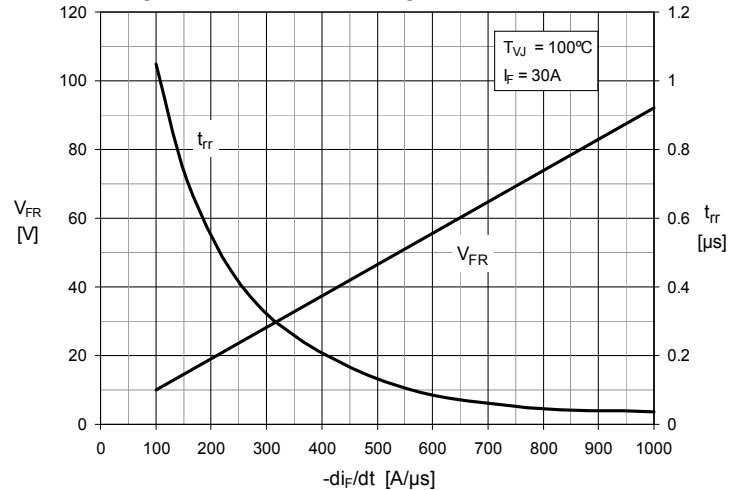**Fig. 23. Forward Current  $I_F$  vs  $V_F$** 

**Fig. 24. Reverse Recovery Charge  $Q_{RM}$  vs.  $-di_F/dt$** 

**Fig. 25. Peak Reverse Current  $I_{RM}$  vs.  $-di_F/dt$** 

**Fig. 26. Dynamic Parameters  $Q_{RM}$ ,  $I_{RM}$  vs.  $T_{VJ}$** 

**Fig. 27. Recovery Time  $t_{rr}$  vs.  $-di_F/dt$** 

**Fig. 28. Peak Forward Voltage  $V_{FR}$ ,  $t_{rr}$  vs  $-di_F/dt$** 


# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email        amall@ameya360.com  
  
QQ            800077892  
  
Skype        ameyasales1 ameyasales2

➤ Customer Service :

Email        service@ameya360.com

➤ Partnership :

Tel            +86 (21) 64016692-8333  
  
Email        mkt@ameya360.com