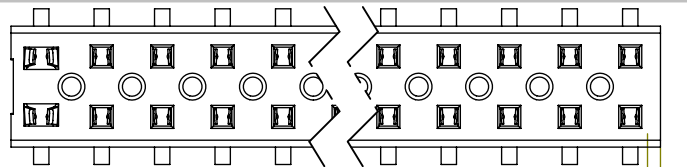


DO NOT
SCALE FROM
THIS PRINTFIG 6
-BE OPTION
(SAME AS FIG 1 EXCEPT INSULATOR)

(SEE NOTE 11)

PATENT NUMBERS
5713755
5961339

CLT-1XX-02-XX-D-XX

No OF POS. PER ROW
-02 THRU -50LEAD STYLE
-02: SURFACE MOUNT
(SEE TABLE 1)

PLATING SPECIFICATION

-F: 3μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-L: 10μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-G: 10μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL

-S: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-H: 30μ" GOLD IN CONTACT AREA, 3μ" GOLD ON TAIL

-FM: 3μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-LM: 10μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

-SM: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

OPTION

-P: PICK & PLACE PAD
AVAILABLE ON POSITIONS
04 THRU 50 ONLY
(SEE FIG. 2, SHT 2. USE LMP-03)

-TR: TAPE AND REEL PACKAGING
(02 THRU 36 POS ONLY)

-BE: BOTTOM ENTRY
(SEE FIG. 6, USE CLT-XX-D-BE-XX)

-A: ALIGNMENT PIN (MOLDED OR STAKED)
(SEE FIGS. 3 & 4, SHT 2)
(STAKED MIN 5 POS)
(MOLDED MIN 3 POS)

-K: POLYIMIDE FILM PAD
(AVAILABLE ON POS. 4 THRU 50 ONLY)
(SEE FIG 5, SHT 2)
(USE K-DOT-.197-.344-.005)

ROW SPEC.

-D DOUBLE ROW
(USE CLT-XX-D EXCEPT
FOR -BE OPTION)

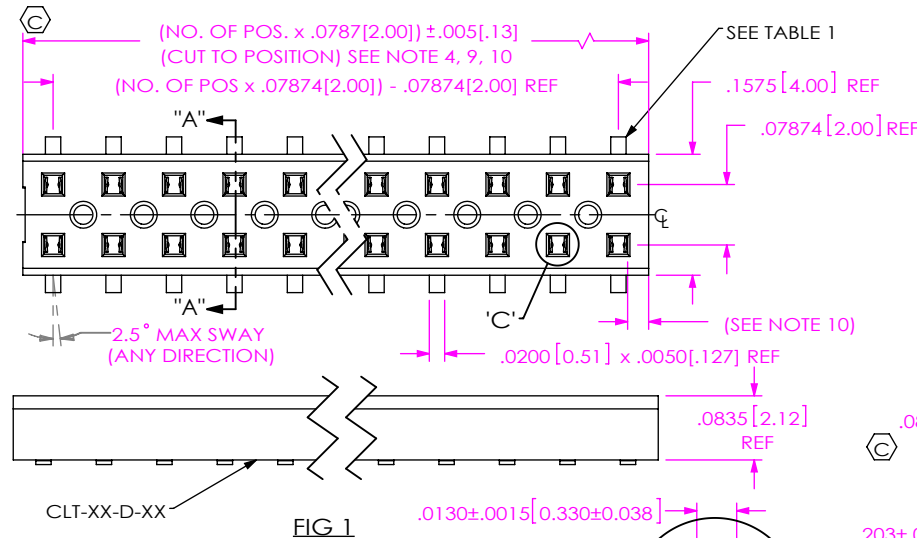


FIG 1

CLT-XX-D-XX

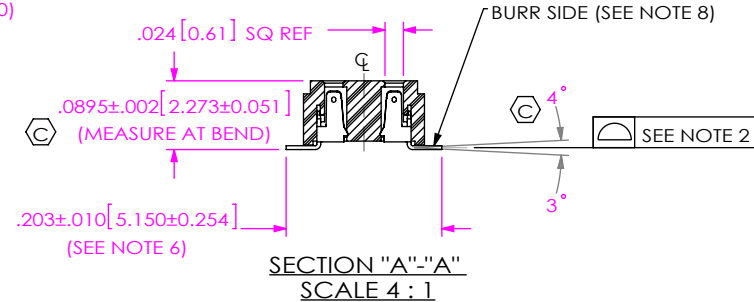
SECTION "A"-"A"
SCALE 4:1





TABLE 1

OPTION	USE CONTACT
CLT-150-02-L(M)-D-XX	C-114-22-L(M)
CLT-150-02-F(M)-D-XX	C-114-22-F(M)
CLT-150-02-G-D-XX	C-114-22-G
CLT-150-02-L(M)-D-BE-XX	C-114-22-L(M)
CLT-150-02-F(M)-D-BE-XX	C-114-22-F(M)
CLT-150-02-G-D-BE-XX	C-114-22-G
CLT-150-02-S(M)-D-BE-XX	C-114-22-S(M)
CLT-150-02-H-D-BE-XX	C-114-22-H
CLT-150-02-H-D-XX	C-114-22-H

SEE NOTE 12

NOTES:

1. REPRESENTS A CRITICAL DIMENSION.
2. COPLANARITY TO BE .004 FOR POSITIONS 2-25, .006 FOR POSITIONS 26-34, AND .008 FOR 35-50.
3. MINIMUM PUSHOUT FORCE: .4 LB.
4. WILL LOSE A POSITION FOR EVERY CUT MADE ON A SOCKET STRIP.
5. ALL OPTIONS: PACKAGE POSITIONS -04 THRU -50 IN PT-CLX002-D TUBE AS SHOWN IN VIEWS, WITH TWO TP-12 PLUGS PER TUBE. LAYER PACKAGE POSITIONS -02 & -03.
6. SHEAR TAILS TO DIMENSION SHOWN.
7. PARTS TO BE SYMMETRICAL ABOUT ϕ
8. .005 MAX. BURR.
9. CUT FLASH TO BE .010 [.25] MAX WITH NO FLASH ALLOWED IN HOLES OR EXTENDING BELOW LEADS
10. STANDARD BODY ENDWALL AFTER CUTTING: .0215 MIN.
11. -BE BODY ENDWALL AFTER CUTTING: .0169 ±.003 [.429 ±.08]
12. C-114-02 CAN BE USED FOR C-114-22. C-114-22-XX IS FOR AUTOMATED ASSEMBLY PROCESSES ONLY.

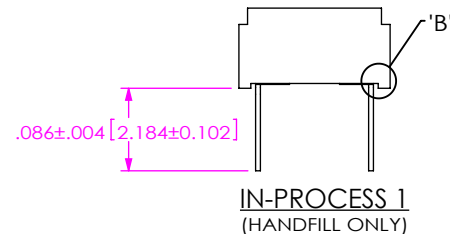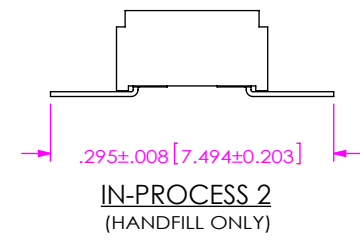DETAIL 'C'
SCALE 16:1IN-PROCESS 1
(HANDFILL ONLY)DETAIL 'B'
SCALE 16:1IN-PROCESS 2
(HANDFILL ONLY)IN-PROCESS
SCALE 8:1
(AUTOMATED ONLY)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.

TOLERANCES ARE:

DECIMALS ANGLES

.XX: ±.01 [.3]

.XXX: ±.005 [.13]

.XXXX: ±.0020 [.051]

PROPRIETARY NOTE

* THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL:

INSULATOR: LCP, UL 94 VO, COLOR BLACK

CONTACT: PHOS BRONZE

F:\DWG\MISC\MKTG\CLT-1XX-02-XX-D-XX-MKT.SLDDRW

DO NOT SCALE DRAWING SHEET SCALE: 2:1

DESCRIPTION:

2MM LOW PROFILE SOCKET STRIP

DWG. NO.



CLT-1XX-02-XX-D-XX

BY: BRATCHER 10/03/1994 SHEET 1 OF 2


samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

FIG 2
-P: PICK & PLACE PAD
(4 POS MIN)

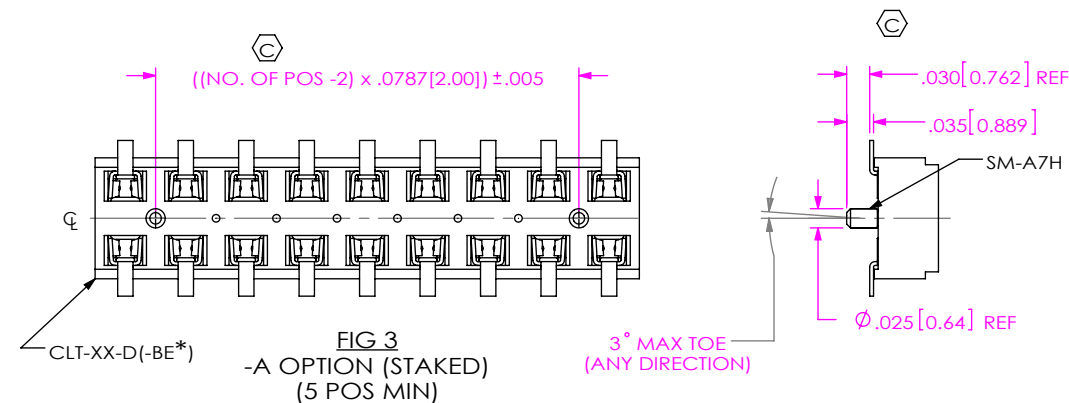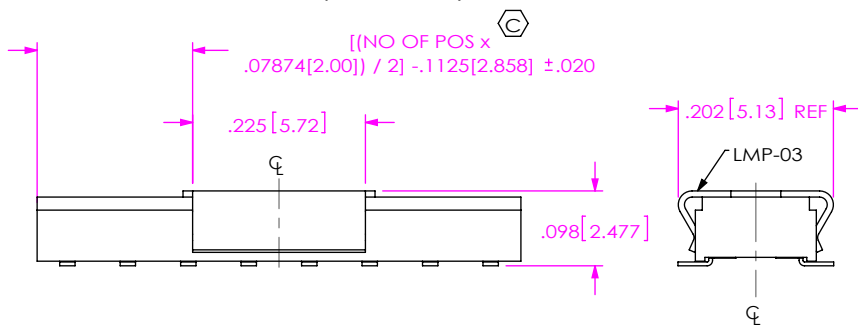


* = FOR -BE OPTION ONLY

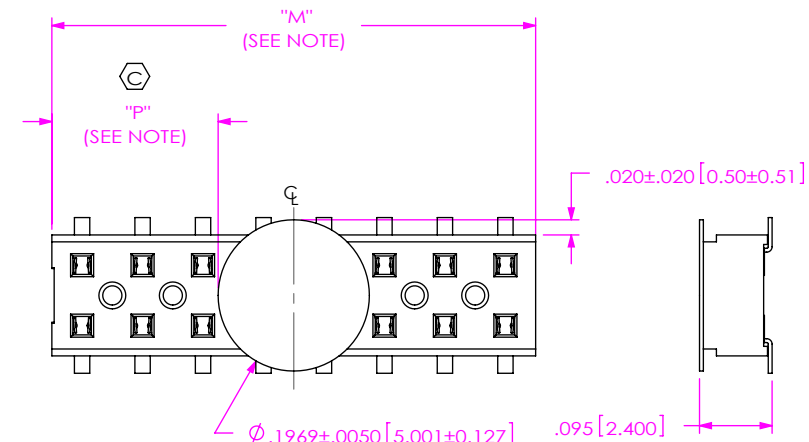


NOTE: "M" = USED MEASURED DIMENSION (REF)
"P" = $((\text{"M"} - .1969[5.00]) / 2) \pm .020[.51]$

FIG 5
-K OPTION
(4 POS MIN)

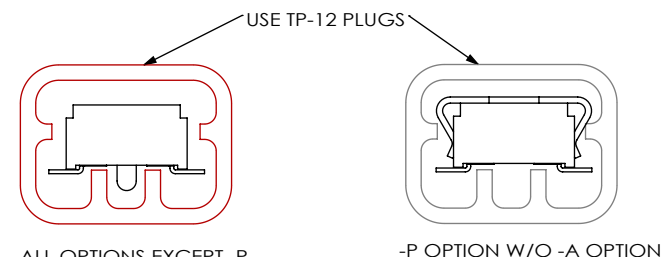

POSITIONS 04 - 50 PACKAGING VIEWS
(SEE NOTE 5)
PT-CLX002-D

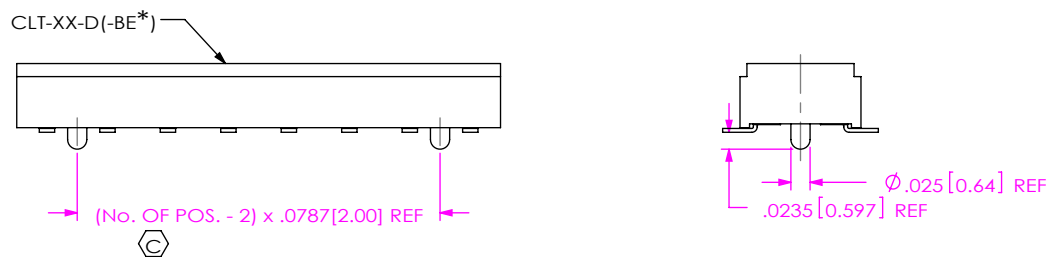

* = FOR -BE OPTION ONLY

FIG 4
-A OPTION (MOLDED)
(3 POS MIN)

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 4:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:
2MM LOW PROFILE SOCKET STRIP

DWG. NO.
CLT-1XX-02-XX-D-XX

BY: BRATCHER 10/03/1994 SHEET 2 OF 2

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com