

# KA319


## Dual Comparator

### Features


- Operates From a Single 5V Supply
- Typically 80ns Response Time at  $\pm 15V$
- Open Collector Outputs : up to +35V
- High Output Drive Current : 25mA
- Inputs and Outputs can be Isolated From System Ground
- Minimum Fan-out of 2 (Each Side)
- Two Independent Comparators

### Description


The KA319 is a dual high speed voltage comparator designed to operate from a single +5V supply up to  $\pm 15V$  dual supplies. Open collector of the output stage makes the KA319 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25mA. Typical response time of 80ns with  $\pm 15V$  power supplies makes the KA319 ideal for application in fast A/D converts, level shifters, oscillators, and multivibrators.



### Internal Block Diagram

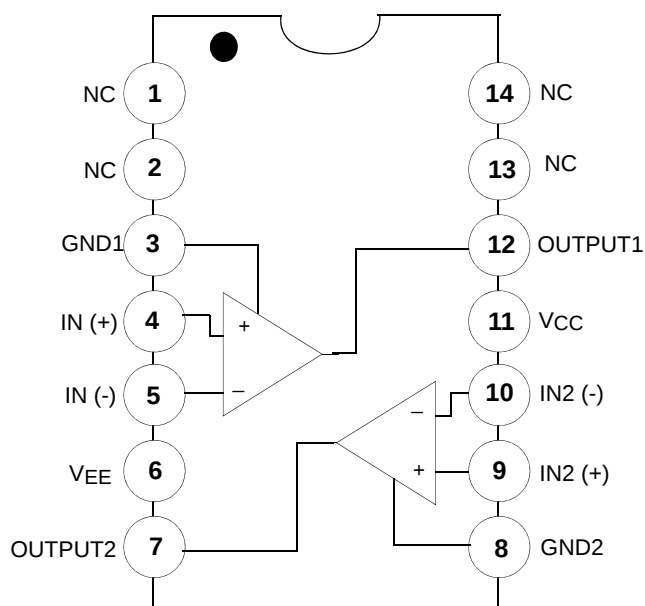

## Schematic Diagram

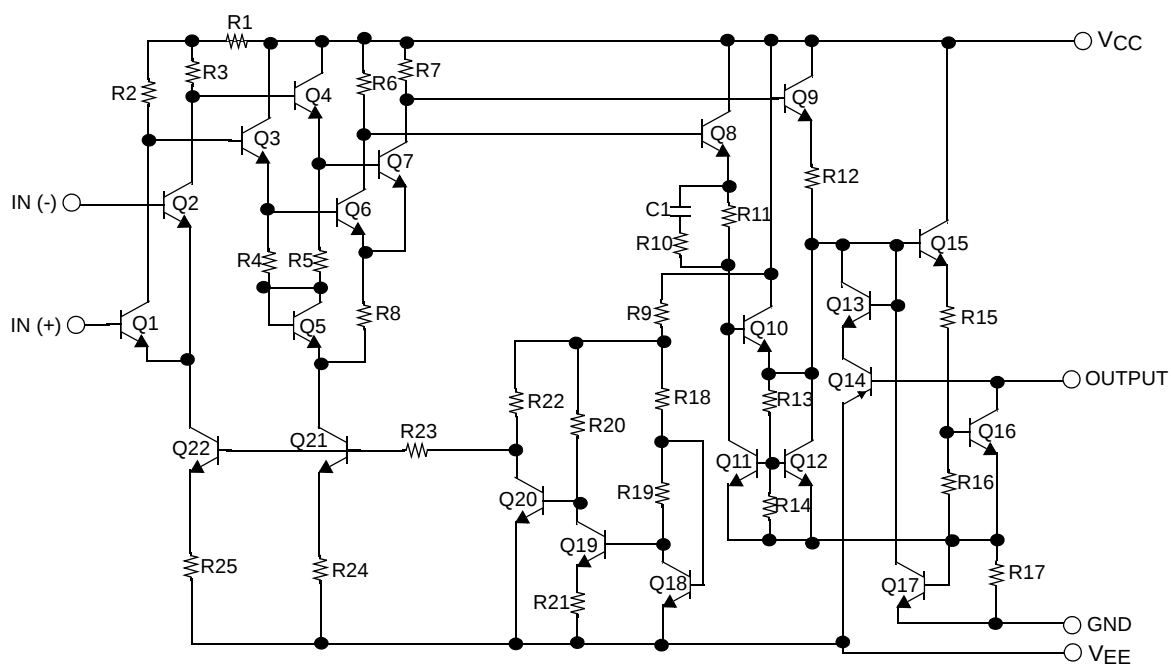

## Absolute Maximum Ratings

| Parameter                                | Symbol   | Value      | Unit |
|------------------------------------------|----------|------------|------|
| Supply Voltage                           | VCC      | 36         | V    |
| Output to Negative Supply Voltage        | VO - VEE | 36         | V    |
| Ground to Negative Supply Voltage        | VEE      | 25         | V    |
| Ground to Positive Supply Voltage        | VCC      | 18         | V    |
| Differential Input Voltage               | VI(DIFF) | 5          | V    |
| Input Voltage                            | VI       | ±15        | V    |
| Output Short Circuit Duration            | -        | 10         | sec  |
| Power Dissipation                        | PD       | 500        | mW   |
| Thermal Resistance Junction-Ambient Max. | Rθja     | 250        | °C/W |
| Operating Temperature Range KA319        | TOPR     | 0 ~ +70    | °C   |
| Storage Temperature Range                | TSTG     | -65 ~ +150 | °C   |

## Electrical Characteristics

( $V_{CC} = +15V$ ,  $V_{EE} = -15V$ ,  $T_A = 25^{\circ}C$ , unless otherwise specified)

| Parameter                    | Symbol        | Conditions                                                             | KA319                      |          |         | Unit    |
|------------------------------|---------------|------------------------------------------------------------------------|----------------------------|----------|---------|---------|
|                              |               |                                                                        | Min.                       | Typ.     | Max.    |         |
| Input Offset Voltage (Note1) | $V_{IO}$      | $R_S \leq 5k\Omega$                                                    | -                          | 2.0      | 8.0     | mV      |
|                              |               | Note3                                                                  | -                          | -        | 10      |         |
| Input Offset Current (Note1) | $I_{IO}$      |                                                                        | -                          | 10       | 200     | nA      |
|                              |               | Note3                                                                  | -                          | -        | 300     |         |
| Input Bias Current           | $I_{BIAS}$    |                                                                        | -                          | 150      | 1000    | nA      |
|                              |               | Note3                                                                  | -                          | -        | 1200    |         |
| Voltage Gain                 | $G_V$         | -                                                                      | 8                          | 40       | -       | V/mV    |
| Response Time (Note2)        | $T_{RES}$     | $V_{CC} = \pm 15V$                                                     | -                          | 80       | -       | ns      |
| Saturation Voltage           | $V_{SAT}$     | $V_{CC}=15V, V_{EE} = -15V, V_I \leq -5mV, I_O = 25mA$                 | -                          | 0.6      | 1.5     | V       |
|                              |               | $V_{CC} = 4.5V, V_{EE} = 0V$<br>$V_I \leq -10mV, I_O \leq 3.2mA$ Note3 | -                          | 0.3      | 0.4     |         |
| Output Leakage Current       | $I_{O(LKG)}$  | $V_I \geq 5mV, V_{O(P)} = 35V$                                         | -                          | -        | -       | $\mu A$ |
|                              |               | Note3                                                                  | -                          | -        | -       |         |
|                              |               | $V_I \geq 10mV, V_{O(P)} = 35V$                                        | -                          | 0.2      | 10      |         |
| Input Voltage Range          | $V_{I(R)}$    | Note3                                                                  | $V_{CC} = \pm 15V$         | $\pm 13$ | -       | V       |
|                              |               |                                                                        | $V_{CC} = 5V, V_{EE} = 0V$ | 1        | 3       |         |
| Differential Input Voltage   | $V_{I(DIFF)}$ | -                                                                      | Note3                      | -        | $\pm 5$ | V       |
| Positive Supply Current      | $I_{CC1}$     | $V_{CC} = 5V, V_{EE} = 0V$                                             | -                          | 3.6      | -       | mA      |
| Positive Supply Current      | $I_{CC2}$     | $V_{CC} = \pm 15V$                                                     | -                          | 7.5      | 12.5    | mA      |
| Negative Supply Current      | $I_{EE}$      | $V_{CC} = \pm 15V$                                                     | -                          | 3        | 5       | mA      |

### Notes :

1. The offset voltage and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.
2. The response time specified is for a 100mV input step with 5mV overdrive.
3. KA319 :  $0 \leq T_A \leq +70^{\circ}C$

## Typical Performance Characteristics

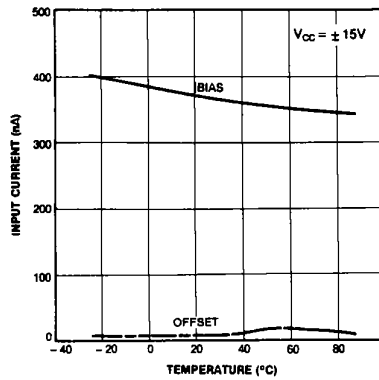


Figure 1. Input Current

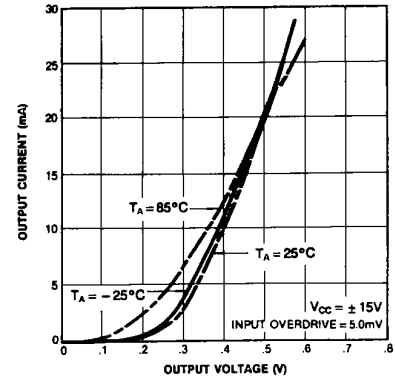


Figure 2. Output Saturation Voltage

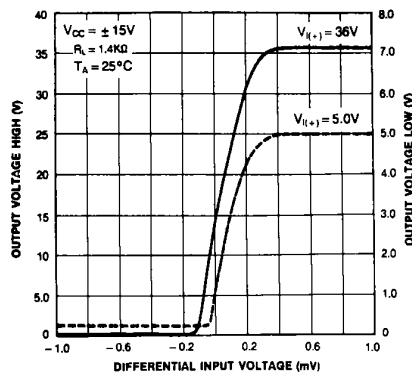


Figure 3. Transfer Function

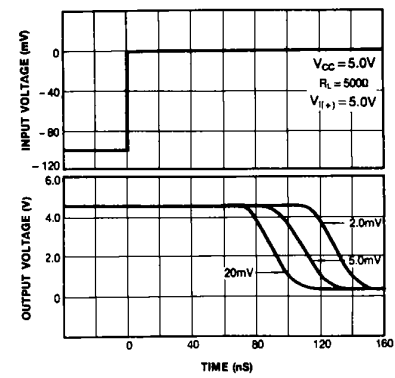


Figure 4. Response Time for Various Input Overdriver

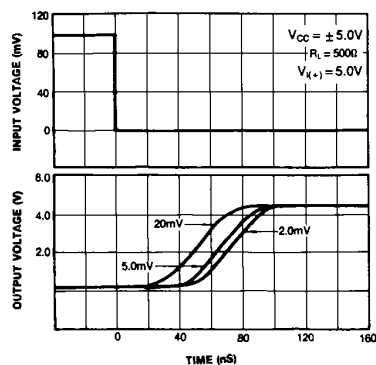


Figure 5. Response Time Various Input Overdriver

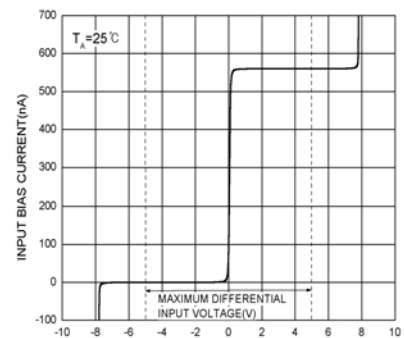


Figure 6. Input Characteristics

## Typical Performance Characteristics (Continued)

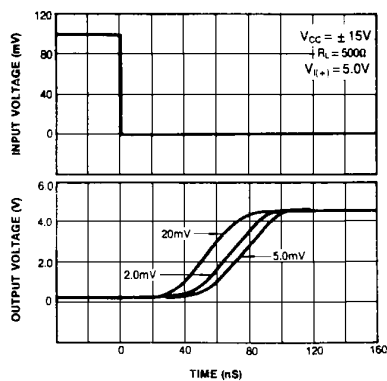


Figure 7. Response Time for Various Input Over driver

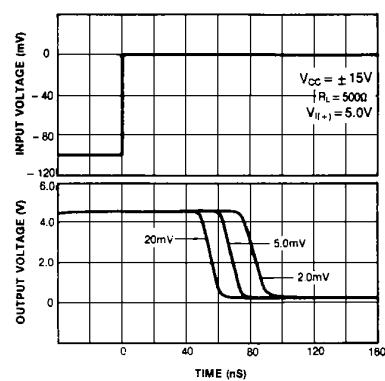


Figure 8. Response Time for Various Input Over driver

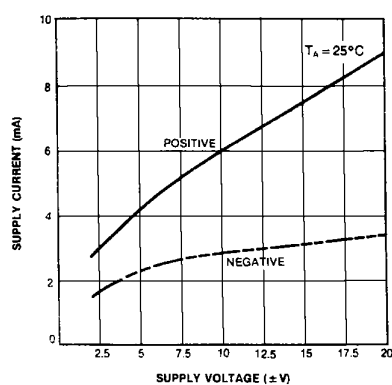


Figure 9. Supply Current

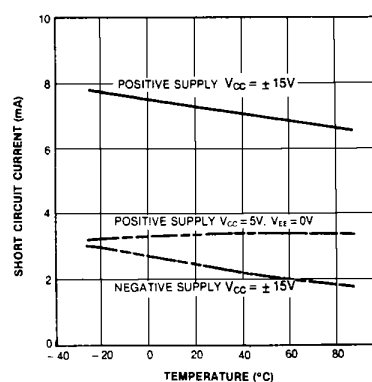


Figure 10. Supply Current

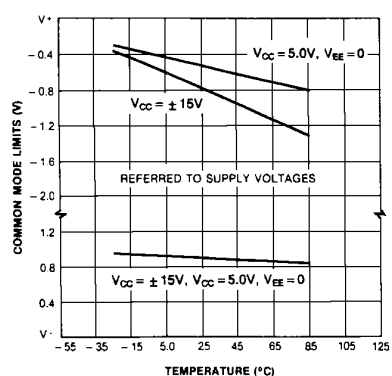


Figure 11. Common Mode Limits

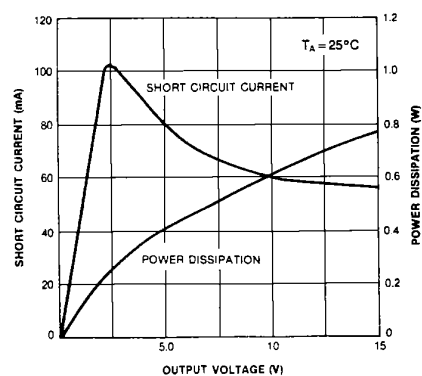



Figure 12. Output Limiting Characteristics

## Mechanical Dimensions

### Package

Dimensions in millimeters

### 14-DIP

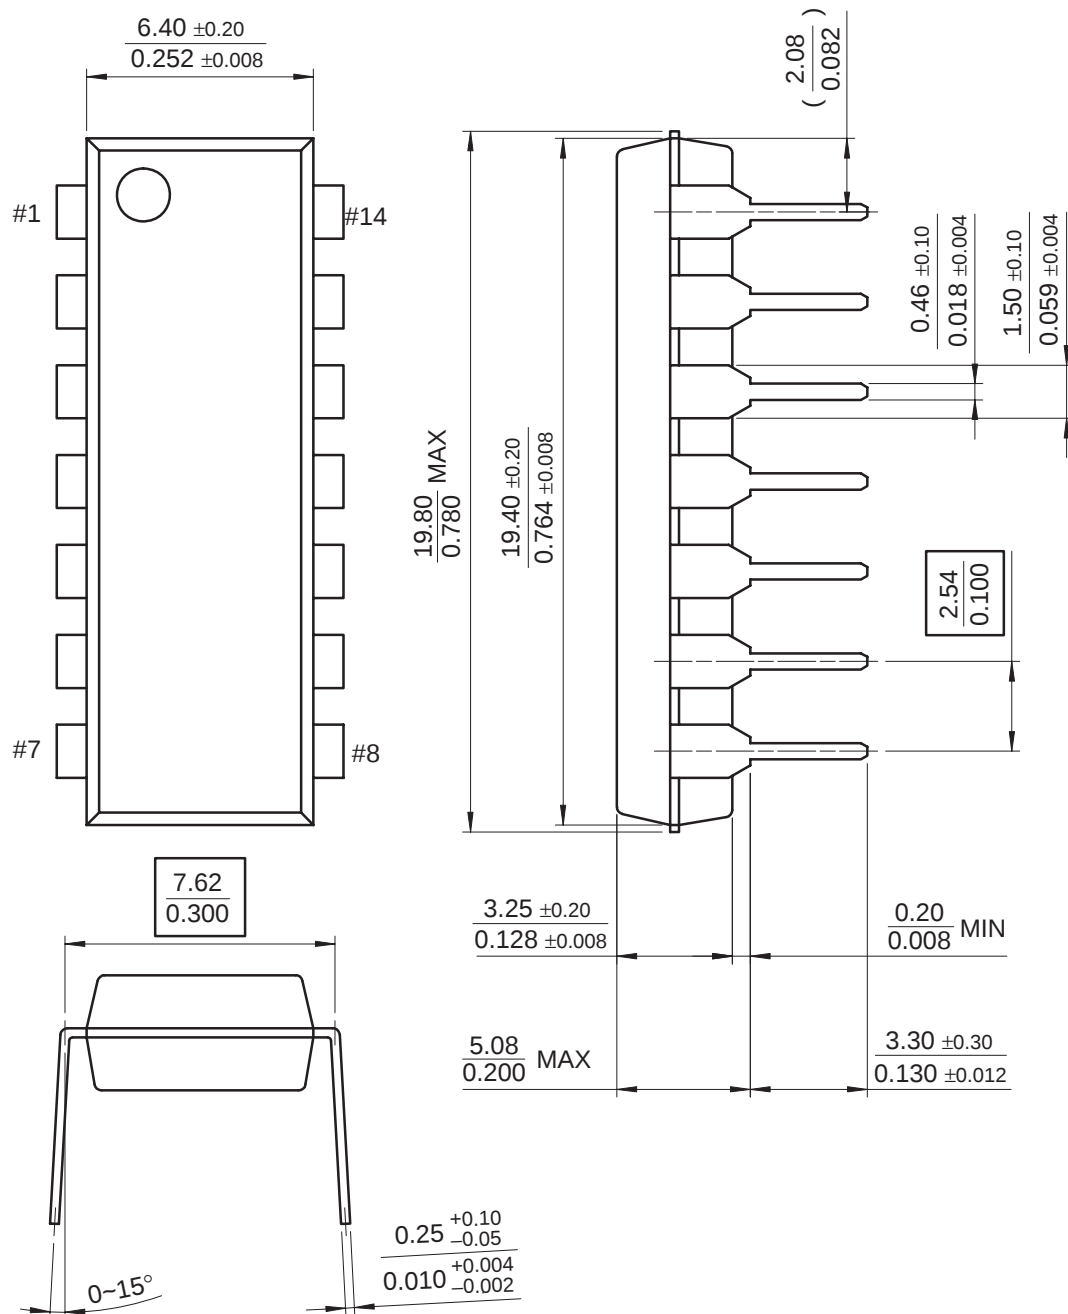


# Mechanical Dimensions (Continued)

## Package

Dimensions in millimeters

## 14-SOP

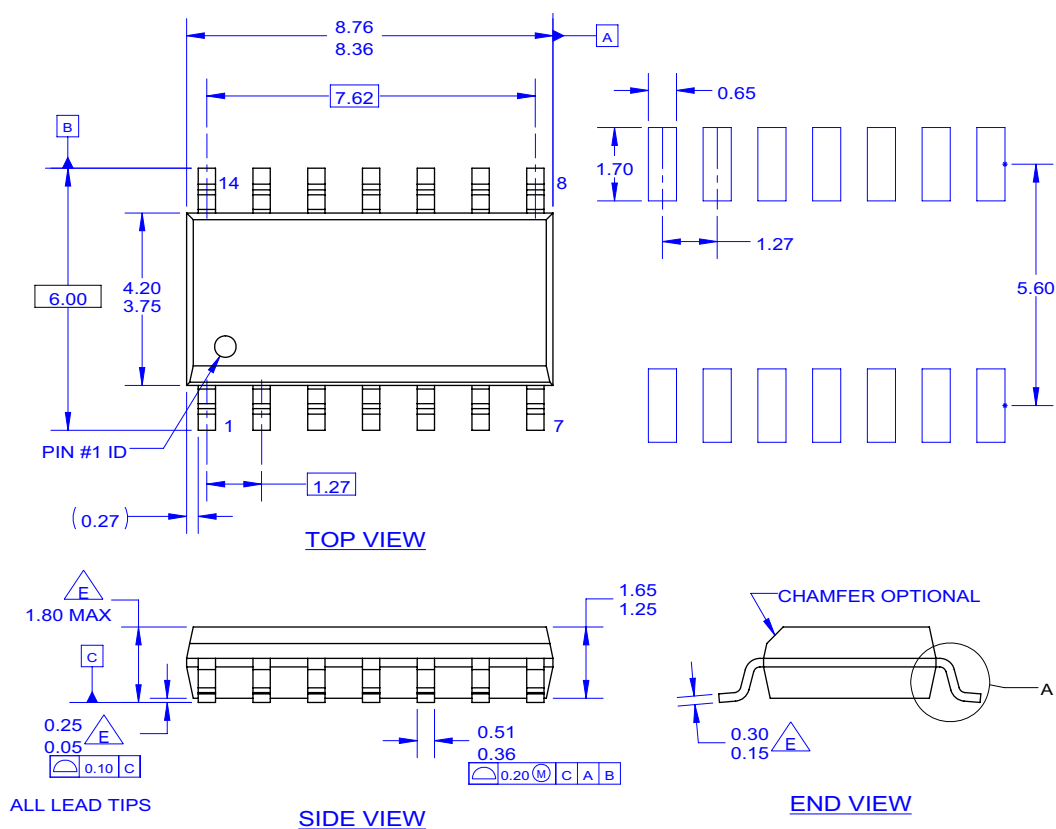

NOTES: UNLESS OTHERWISE SPECIFIED

A. THIS PACKAGE REFERENCE TO JEDEC MS-012 VARIATION AB.

B. ALL DIMENSIONS ARE IN MILLIMETERS.

C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR EXTRUSIONS.

D. DIMENSIONS AND TOLERANCES AS PER ASME Y14.5-1994.

E. OUT OF JEDEC STANDARD VALUE.

F. LAND PATTERN STANDARD: SOIC127P600X145-14M.

G. FILE NAME: MKT-M14C REV2

## Ordering Information

| Product Number | Package | Operating Temperature |
|----------------|---------|-----------------------|
| KA319          | 14-DIP  | 0 ~ +70°C             |
| KA319D         | 14-SOP  |                       |

### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

# AMEYA360

## Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email [amall@ameya360.com](mailto:amall@ameya360.com)

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email [service@ameya360.com](mailto:service@ameya360.com)

➤ Partnership :

Tel +86 (21) 64016692-8333

Email [mkt@ameya360.com](mailto:mkt@ameya360.com)