
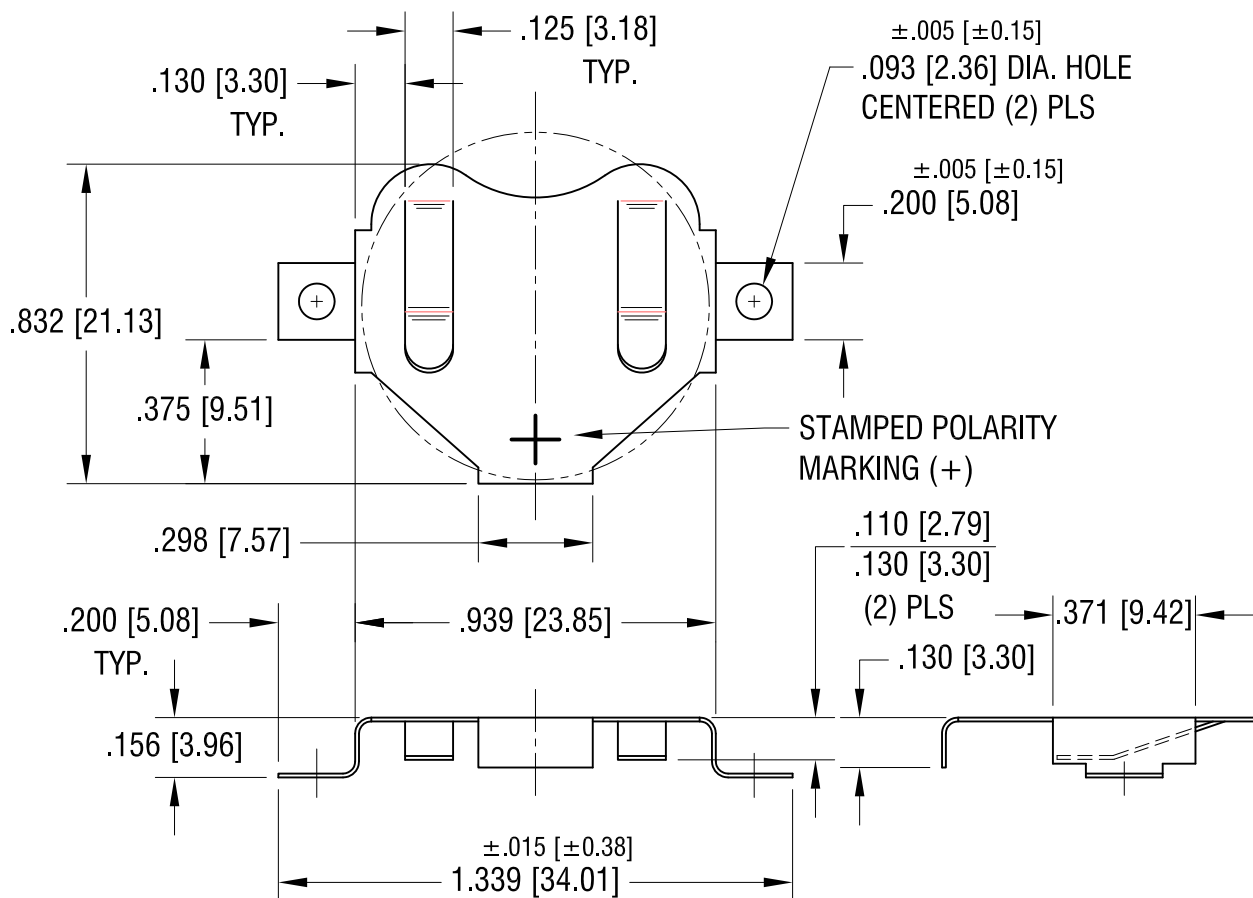


Diagram illustrating the Mounting Pad Layout. The layout shows three square pads connected by dashed lines. The dimensions and tolerances are as follows:

- Distance between the first and second pad: $.200 [5.08] \text{ SQ. MIN.}$
- Distance between the second and third pad: $.156 [3.96] \text{ SQ. MIN.}$ (labeled as NEG. CONTACT (PAD))
- Total distance between the first and third pad: $1.210 [30.73] \text{ MIN.}$

MOUNTING PAD LAYOUT

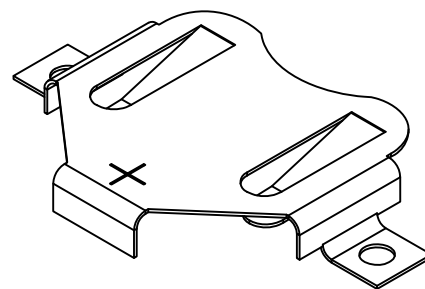

www.keyelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900

23mm SM COIN CELL CLIP

.010 [0.25] PHOSPHOR BRONZE

4.07.09

SCALE

DWG NO.	
---------	--

C

ANGULAR $\pm 1^\circ$
UNLESS OTHERWISE SPECIFIED

3084

DATE _____

DESCRIPTION

REV.

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com