
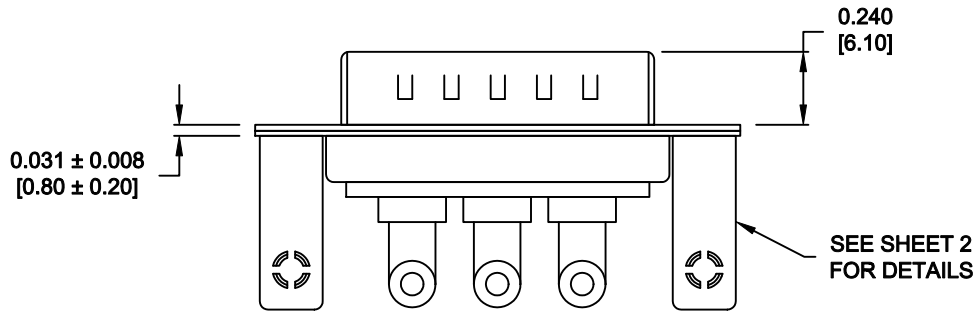


DESCRIPTION: POWER - RIGHT ANGLE - MALE - MACHINED - IP67

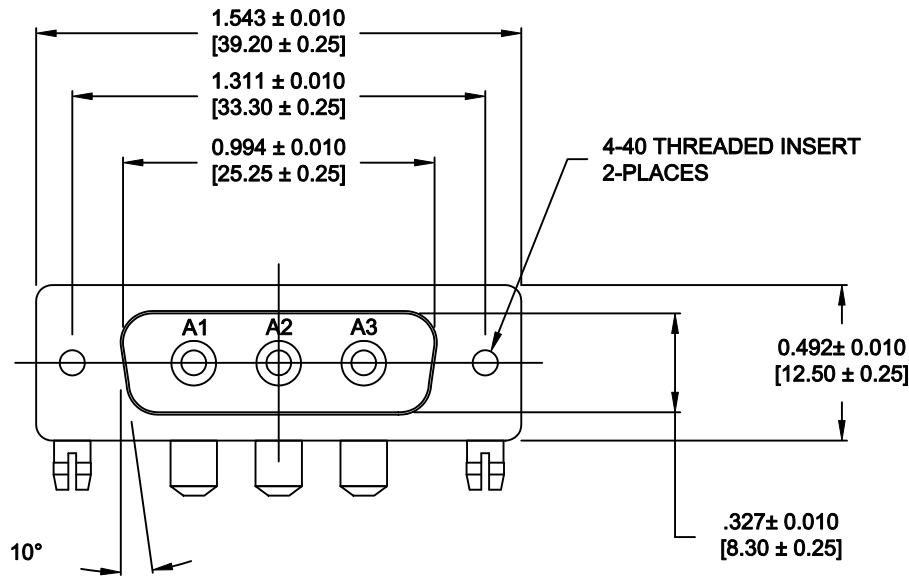

SPECIFICATIONS:

ELECTRICAL:
INSULATOR RESISTANCE: 5 G OHMS Min.
DIELECTRIC WITHSTANDING: 1,000VAC r.m.s.
OPERATING TEMPERATURE: -55° C ~ +155° C
CONTACT RESISTANCE: 1.0 Milliohms Max.
POWER PINS: 40 AMPS

MECHANICAL:
CONTACT INSERTION FORCE: 4.5 Kg Max.
CONTACT SEPARATOR FORCE: 0.3Kg Min.

MATERIALS:
CONTACTS: COPPER ALLOY
INSULATOR: PBT UL94V-0 RATED, BLK 230°C PROCESS TEMP.
SHELL: STEEL
BOARD LOCK: BRASS, NICKEL PLATED
CINCHNUT: BRASS, NICKEL PLATED
BRACKET: STEEL, NICKEL PLATED
SEAL: F08 FLEXIBLE ADHESIVE

FINISH:
SHELL: NICKEL
CONTACTS: FULL GOLD FLASH

684S3W3103L461

46 = 4-40 INSERTS /
BOARD LOCKS



MEETS IP67 STANDARDS

(SEE PAGE 3 FOR SEALING DETAILS)


RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 04-22-13	
		CHECKED:		DATE:	
		SCALE: 1.5 = 1	SHEET 1 OF 3		REV 2
NorComp		DWG NO. 684S3W3103L461			

NOTE:
POWER CONTACTS COME
PRE-LOADED INTO INSULATORS

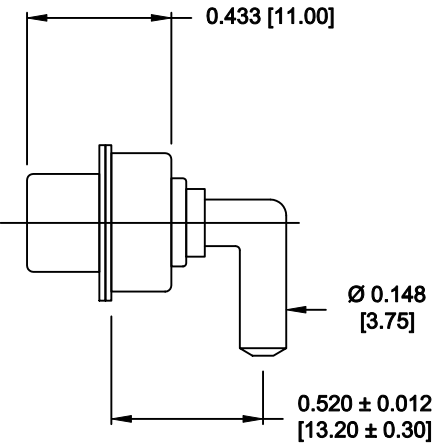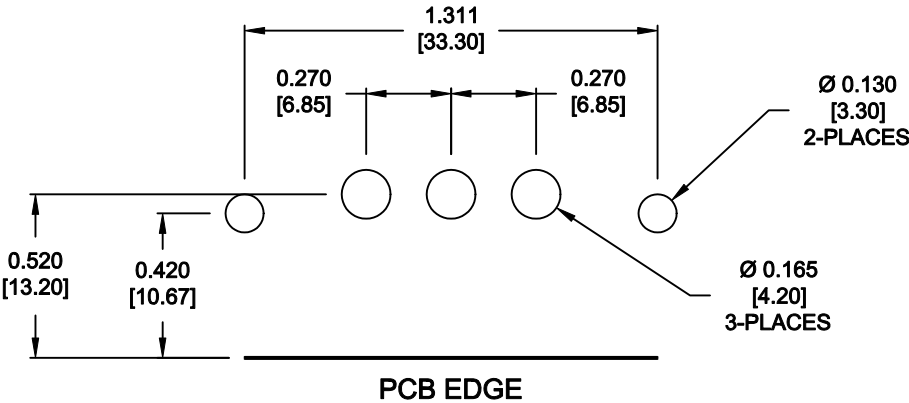



40 AMP POWER CONTACT

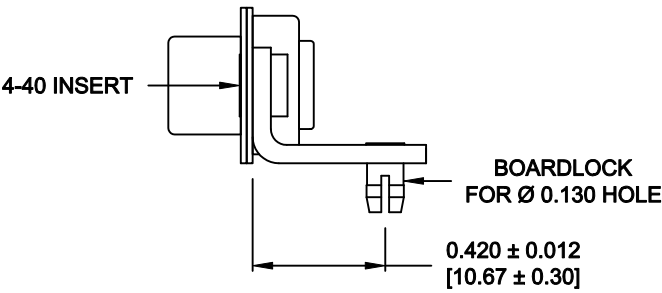

MOUNTING HARDWARE

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 04-22-13		
		CHECKED:		DATE:		
		SCALE: 1.5 = 1		SHEET 2 OF 3		REV 2
		DWG NO. 684S3W3103L461				

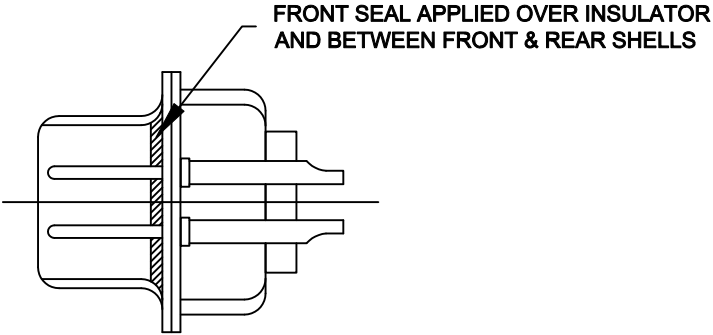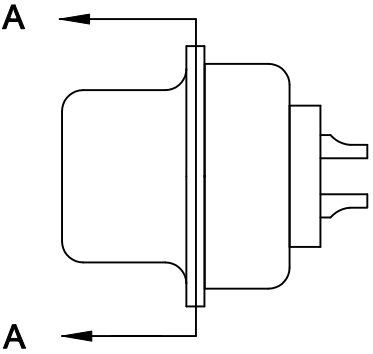

DETAIL A-A
SHOWN FOR REFERENCE ONLY

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.	DRAWN: M. SIGMON		DATE: 04-22-13	
		CHECKED:		DATE:	
NorComp	SCALE: 1.5 = 1	SHEET 3		OF 3	REV 2
	DWG NO. 684S3W3103L461				

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com