
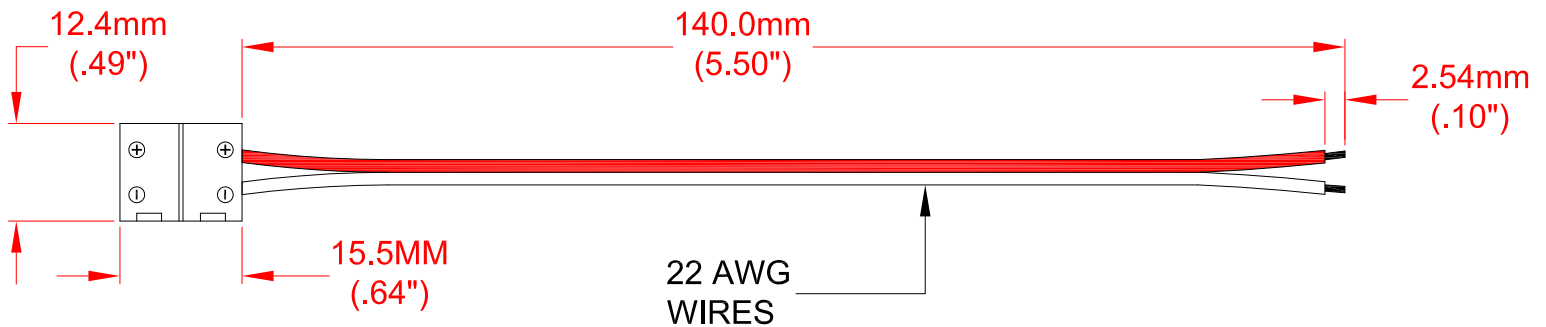


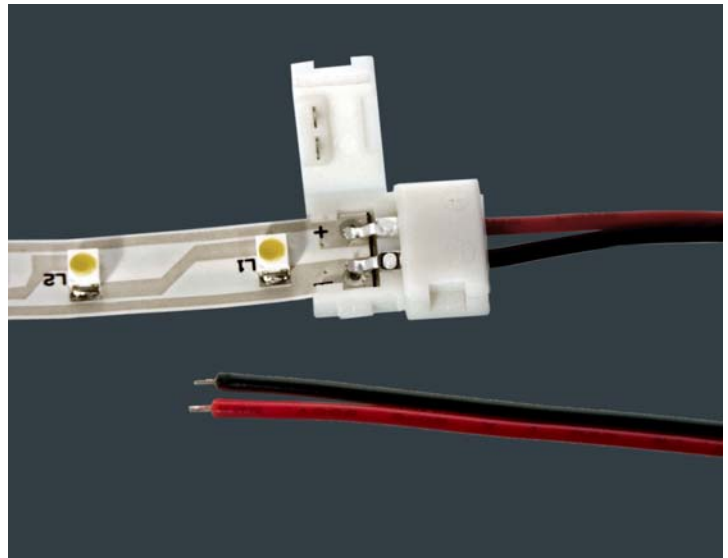

NOTES:

1. OPERATION

1. GENTLY LIFT LATCH AT SIDE OF CONNECTOR.
2. SWING COVER OFF OF CONTACTS.
3. SLIDE THE FLEX TAPE INTO THE CONNECTOR PLACING THE EDGE OF THE FLEX TAPE UNDER 2 HOLD DOWN TABS. MAKE SURE THE POLARITY IS MATCHED BETWEEN THE FLEX TAPE AND THE CONNECTOR COVER.
4. FOLD OVER THE COVER AND PRESS IN PLACE UNTIL THE LATCH IS FULLY ENGAGED.

2. LIMIT CURRENT TO A MAXIMUM OF 5 AMPS.

JKL PART NO.: ZFS-CH140-8I

			METRIC		DIMENSIONS ARE IN mm (INCHES)		JKL COMPONENTS CORPORATION			
			 THIRD ANGLE PROJECTION		TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-		TITLE NO SOLDER 8mm FLEX TAPE INPUT CONNECTOR			
			DRAWN BY L. WENGSTROM		APPV'D BY L.R.		DATE 3/5/13		SIZE A	
							FSCM NO. 55335		DRAWING NO. ZFS-CH140-8I	
RELEASE & CANCEL PL-1301-03			3/5/13							
REV. NO.			DESCRIPTION/ECO NUMBER		APPV'D DATE		SCALE NONE		RELEASED DATE 3/5/13	
			MANUAL REVISIONS NOT PERMITTED				REVISION DATE		REV. NO.	
									SHEET 1 OF 1	

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com