

## Sales Outline Drawing


Revision B

## Specifications:


|                                   |                                           |
|-----------------------------------|-------------------------------------------|
| Voice Coil Impedance ( $\Omega$ ) | $8 \pm 15\%$ at 800 Hz / 1.0 V            |
| Rated Input (W)                   | 0.25                                      |
| Max. Input (W)                    | 0.30                                      |
| Lowest Resonance Freq Fo (Hz)     | $1800 \pm 20\%$                           |
| Frequency Range (Hz)              | Fo ~ 7000                                 |
| Output S.P.L. (dB)                | $75 \pm 3$ at 1W 1M .8k, 1k, 1.2k, 1.5kHz |
| Magnet Size (mm)                  | $\varnothing 6.5 * 1.5$                   |
| Magnet                            | Ferrite                                   |
| Core Material Mylar               | Transparent                               |
| Frame Material                    | Metal                                     |
| Operating / Storage Temp          | -25 to 50°C                               |
| Options                           | For other options contact factory         |

## Dimensions: (units: mm)

ROHS Compliant

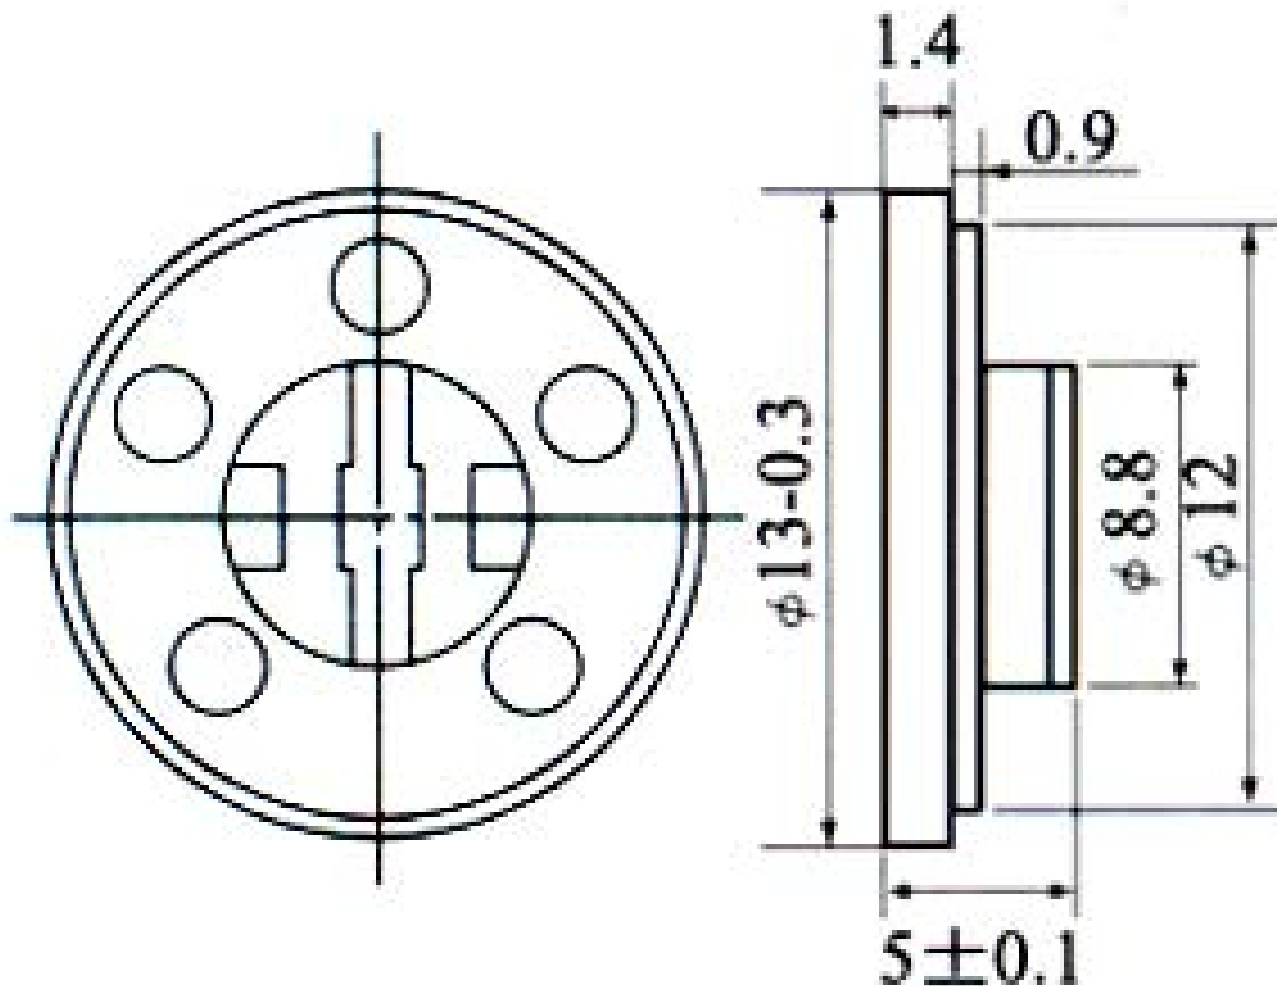

### Frequency Response:

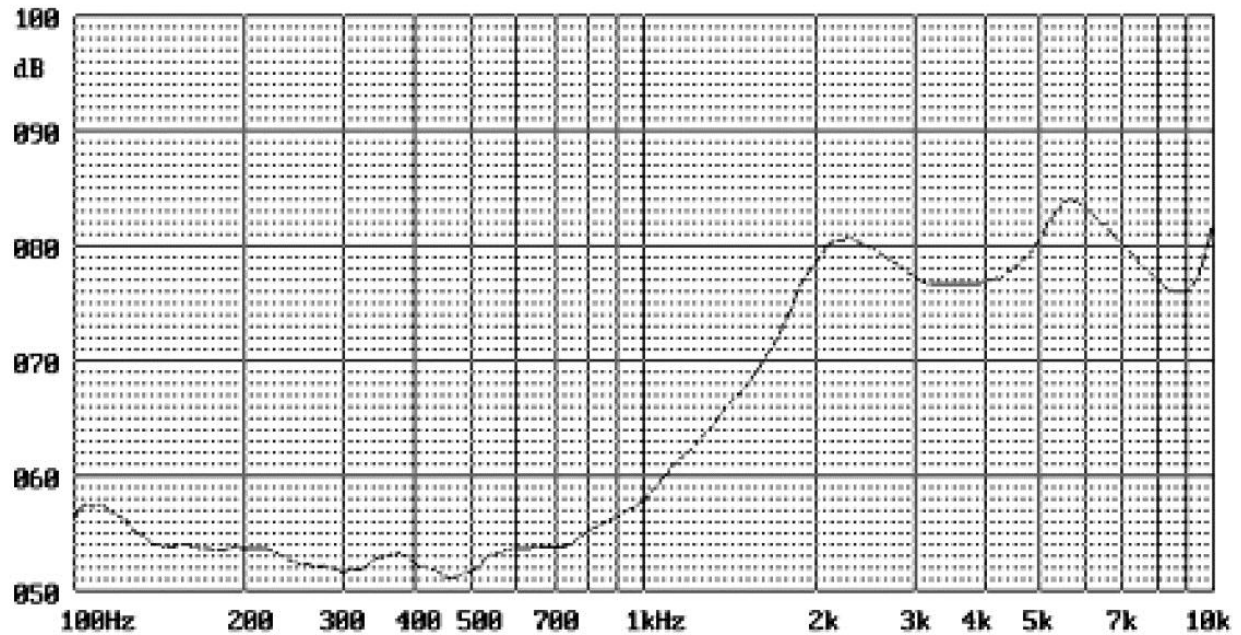

# AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit [www.ameya360.com](http://www.ameya360.com)

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd  
Minhang District, Shanghai , China

➤ Sales :

Direct     +86 (21) 6401-6692  
  
Email       amall@ameya360.com  
  
QQ         800077892  
  
Skype      ameyasales1 ameyasales2

➤ Customer Service :

Email       service@ameya360.com

➤ Partnership :

Tel         +86 (21) 64016692-8333  
  
Email      mkt@ameya360.com