


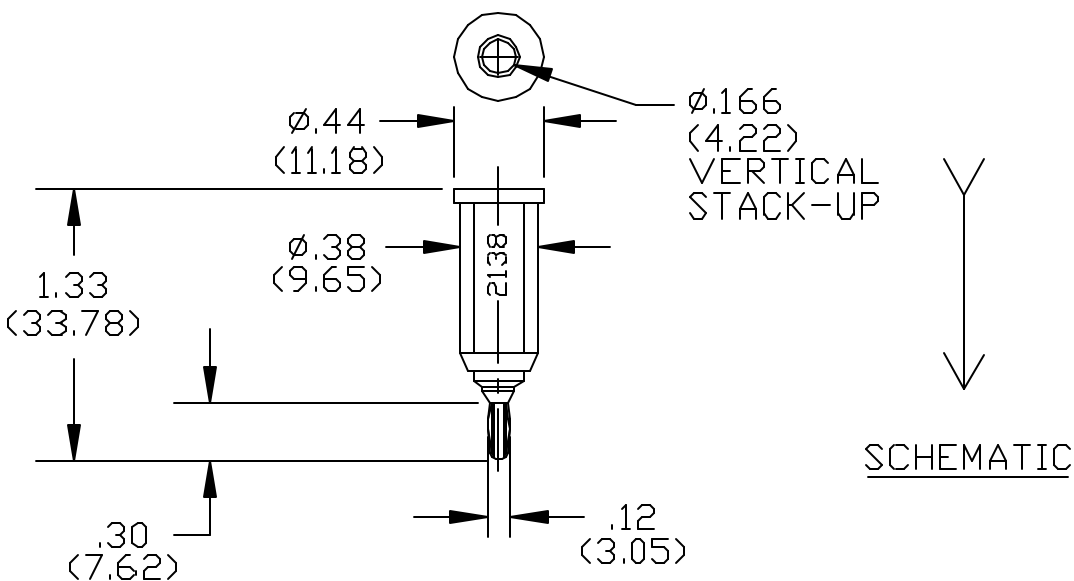

FEATURES:

- Permits standard banana plug to be used with equipment having miniature banana jacks.

MATERIALS:

Upper Conn.: Banana Jack

Material: Body, Brass, H.H. per QQ-B-626, Alloy 360.

Finish: Nickel plate per QQ-N-290, Class 2 (.0002 min.).

Insulation: Acrylonitrile – Butadiene – Styrene, molded to banana jack and banana plug body.

Operating Temperature: +50°C. (+122°F.) Max.

Marking: "POMONA ELECTRONICS CALIF. 2138."

Lower Conn.: Miniature Banana Plug

Material: Spring, one piece heat treated Beryllium Copper, Berylco 25 per QQ-C-533.

Finish: Nickel plate per QQ-C-290, Class 2 (.0002 min.).

RATINGS: (Entire Assembly)

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: 2500 VDC

Current: 5 Amperes Cont.

ORDERING INFORMATION: Model 2138-*

*=Color, -0 Black, -2 Red

Ordering Example: 2138-2 Color is Red

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com