


MMBT5401-G (PNP)



RoHS Device



Features

- Epitaxial planar die construction.
- Complementary NPN type available (MMBT5551-G).
- Ideal for medium power amplification and switching.

Diagram:

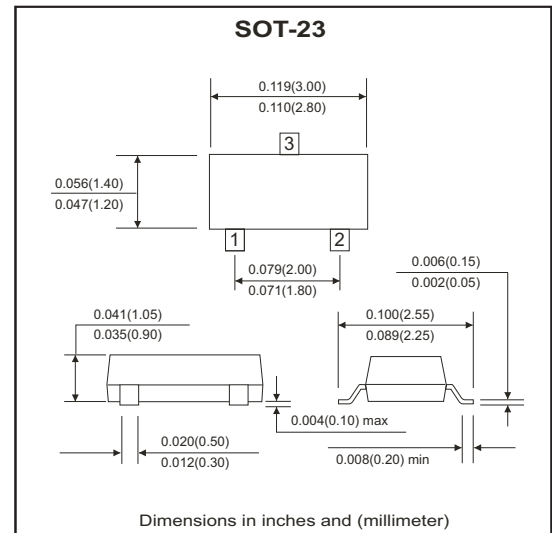

Marking: 2L

Maximum Ratings (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-base voltage	V_{CBO}	-160	V
Collector-emitter voltage	V_{CEO}	-150	V
Emitter-base voltage	V_{EBO}	-5	V
Collector current - continuous	I_C	-0.6	A
Collector dissipation	P_C	0.3	W
Junction and storage temperature	T_J, T_{STG}	-55 ~ +150	$^\circ\text{C}$

Electrical Characteristics (at $T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	Min	Max	Unit
Collector-base breakdown voltage	$I_C=-100\mu\text{A}, I_E=0$	$V_{(BR)CBO}$	-160		V
Collector-emitter breakdown voltage	$I_C=-1\text{mA}, I_B=0$	$V_{(BR)CEO}$	-150		V
Emitter-base breakdown voltage	$I_E=-10\mu\text{A}, I_C=0$	$V_{(BR)EBO}$	-5		V
Collector cut-off current	$V_{CB}=-120\text{V}, I_E=0$	I_{CBO}		-0.1	μA
Emitter cut-off current	$V_{EB}=-4\text{V}, I_C=0$	I_{EBO}		-0.1	μA
DC current gain	$V_{CE}=-5\text{V}, I_C=-1\text{mA}$	$h_{FE(1)}$	80		
	$V_{CE}=-5\text{V}, I_C=-10\text{mA}$	$h_{FE(2)}$	100	200	
	$V_{CE}=-5\text{V}, I_C=-50\text{mA}$	$h_{FE(3)}$	50		
Collector-emitter saturation voltage	$I_C=-50\text{mA}, I_B=-5\text{mA}$	$V_{CE(sat)}$		-0.5	V
Base-emitter saturation voltage	$I_C=-50\text{mA}, I_B=-5\text{mA}$	$V_{BE(sat)}$		-1	V
Transition frequency	$V_{CE}=-5\text{V}, I_C=-10\text{mA}, f=30\text{MHz}$	f_T	100		Mhz

RATING AND CHARACTERISTIC CURVES (MMBT5401-G)

Fig.1 Max Power Dissipation vs. Ambient Temperature

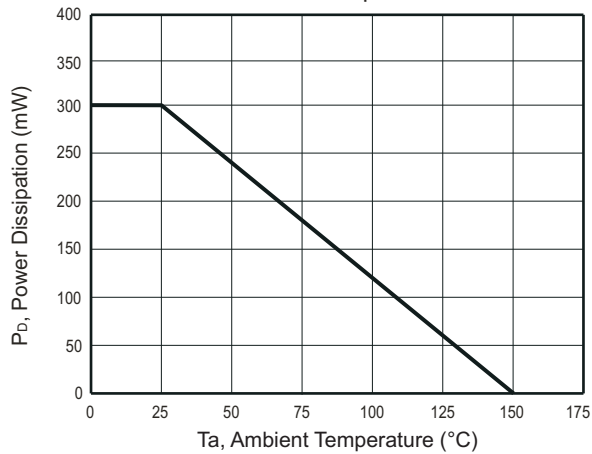


Fig.2 Collector Emitter Saturation Voltage vs. Collector Current

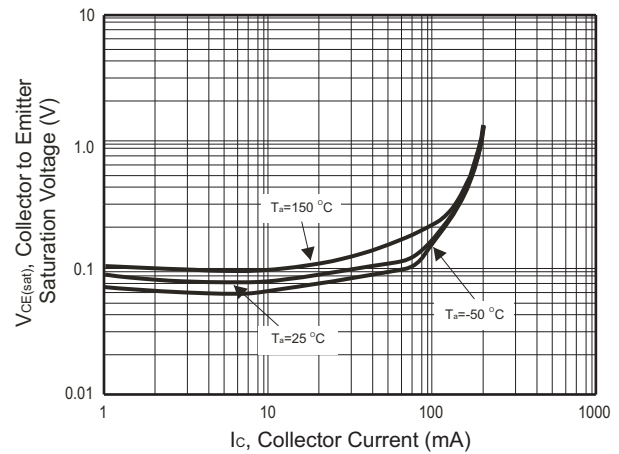


Fig.3 DC Current Gain vs. Collector Current

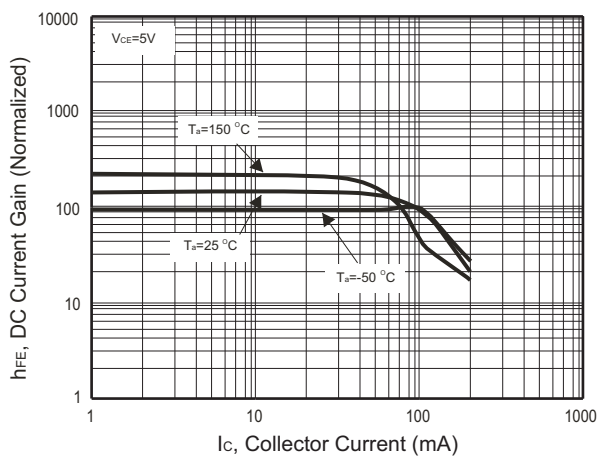


Fig.4 Base Emitter Voltage vs. Collector Current



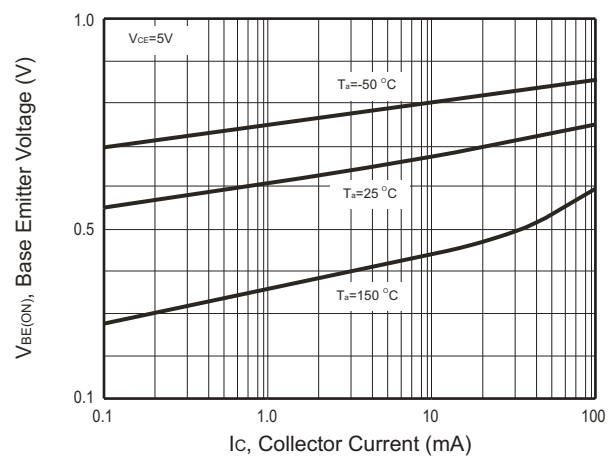


Fig.5 Gain Bandwidth Product vs. Collector Current

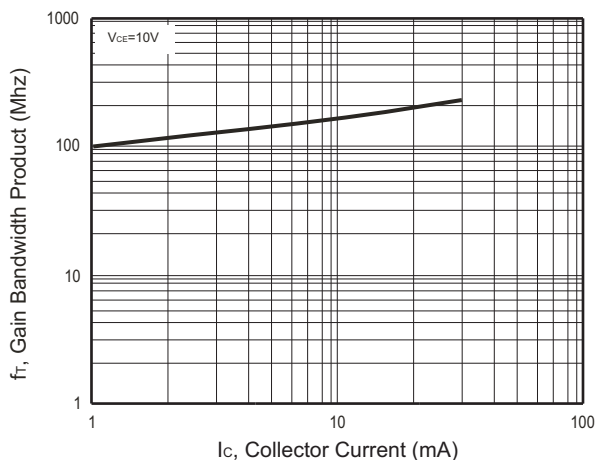

Reel Taping Specification

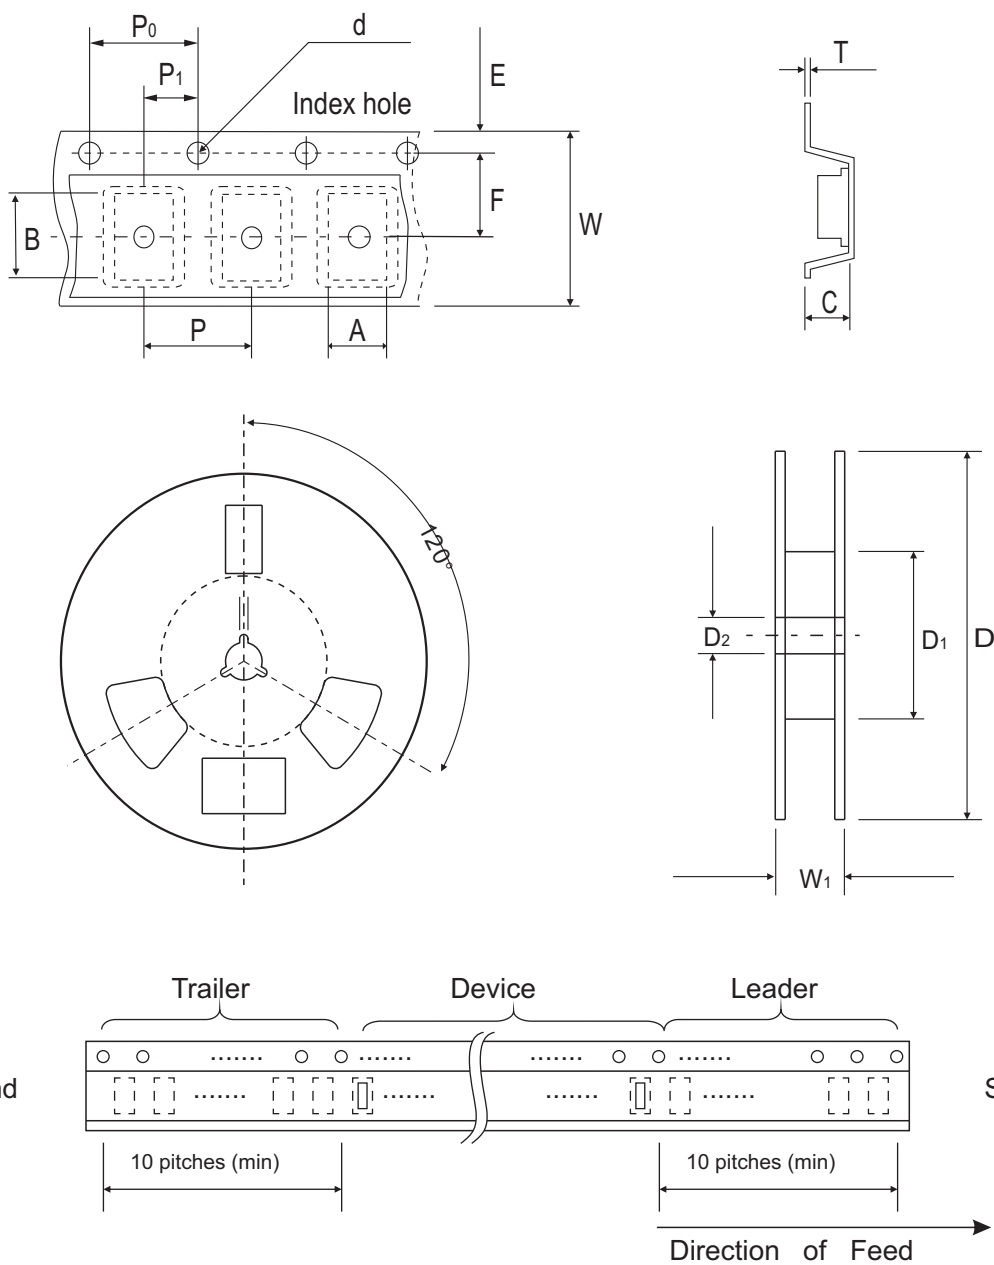


SOT-23	SYMBOL	A	B	C	d	D	D ₁	D ₂
	(mm)	3.10 ± 0.10	2.85 ± 0.10	1.40 ± 0.10	1.55 ± 0.10	178 ± 1	50.0 MIN.	13.0 ± 0.20
	(inch)	0.122 ± 0.004	0.112 ± 0.004	0.055 ± 0.004	0.061 ± 0.004	7.008 ± 0.04	1.969 MIN.	0.512 ± 0.008

SOT-23	SYMBOL	E	F	P	P ₀	P ₁	W	W ₁
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 ± 0.30	14.4 MAX.
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 ± 0.012	0.567 MAX.


Marking Code

Part Number	Marking Code
MMBT5401-G	2L



Suggested PAD Layout

SIZE	SOT-23	
	(mm)	(inch)
A	0.80	0.031
B	1.90	0.075
C	2.02	0.080
D	2.82	0.111

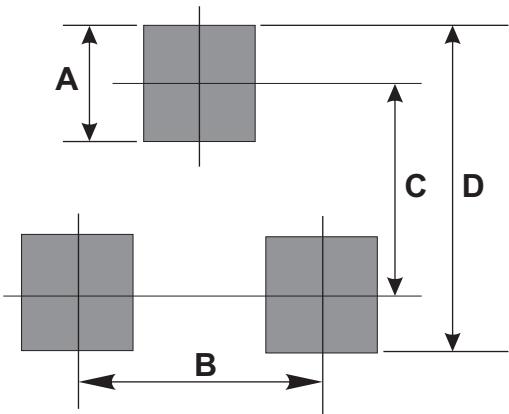

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23	3,000	7

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com