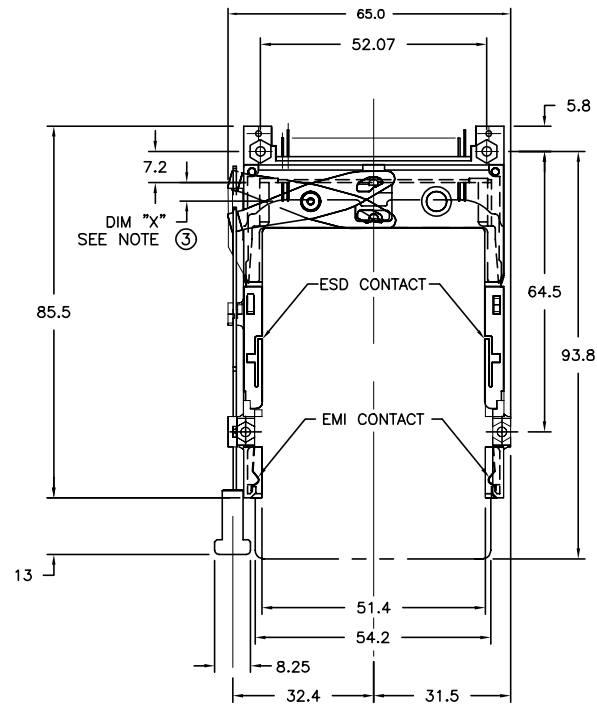



NOTES:

- REFER TO HEADER DRAWING 92140 AND EJECT MECHANISM 95079 FOR ADDITIONAL DIMENSIONS, MATERIAL, AND PLATING INFORMATION.

mat'l. code				surface				tolerance				projection				product family																			
				ISO1302 ✓				ISO1101 ISO406								MCS																			
ltr		ecn		nodr		date		tolerances unless otherwise specified				title																							
L	V20418		LP	3/1/02		angle 0°±2'		0.X±0.3				MM				5V EJECT HEADER ASSY																			
M	N05-0054		WB	03/01/05				0.XX±0.13																											
N	BLX-N-011441		ZK	04/02/12				0.XXX±0.051																											
						dr		D.SHEAFFER				11/17/94				FCI				dwg no				sheet 1 of 9				size							
						enr		D.BRANN				12/7/94								95620				A4											
						chr		D.BRANN				12/7/94																							
						appd		D.BRANN				12/7/94																							
sheet		revision		N		N		N		N		N		N		N		N		N		N		N		N		N		N		N		N	
index		sheet		1		2		3		4		5		6		7		8		9															

DESCRIPTION: ABOVE P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ⑥	EJ. MECHANISM ASSY 95079-XXXX ⑦	SOLDERABLE HOLD DOWN ④	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS
000CA	RIGHT	R/A	0.0	000	00CA			
000CAH ⑦	RIGHT	R/A	0.0	000	00CA	93925-001		
001CA	RIGHT	SMT-STG	0.0	001	00CA			
002CA	RIGHT	SMT-IL	0.0	002	00CA			
020CA	RIGHT	R/A	2.0	040	02CA			
040CA	RIGHT	R/A	4.0	010	04CA			
050CA	RIGHT	R/A	5.0	020	05CA			
050CAH ⑦	RIGHT	R/A	5.0	020	05CA	93925-004		
100CA	LEFT	R/A	0.0	000	10CA			
100CAH ⑦	LEFT	R/A	0.0	000	10CA	93925-001		
101CA	LEFT	SMT-STG	0.0	001	10CA			
102CA	LEFT	SMT-IL	0.0	002	10CA			
120CA	LEFT	R/A	2.0	040	12CA			
140CA	LEFT	R/A	4.0	010	14CA			
150CA	LEFT	R/A	5.0	020	15CA			
005CA	RIGHT	R/A	0.0	005	00CA			95620-000CA or -100CA
025CA	RIGHT	R/A	0.0	045	00CA			95620-020CA or -120CA
105CA	LEFT	R/A	0.0	005	10CA			95620-000CA or -100CA
125CA	LEFT	R/A	0.0	045	10CA			95620-020CA or -120CA

NOTES:

1. MATERIAL:

1.1 HEADER ASSY:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK - ABOVE PCB
HIGH TEMPERATURE THERMOPLASTIC UL94V-0 (WHITE) - BELOW PCB
PIN: PHOSPHOR BRONZE

1.2 EJECT MECHANISM ASSY:

PLASTIC GUIDE: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PLASTIC PUSH-ROD BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
COVER PLATE, EJECT PLATE, LINK ARM,
PUSH ROD: STAINLESS STEEL
EMI CONTACT: PHOSPHOR BRONZE

2. FINISH (PIN)

UNDER PLATING: 0.5um Ni
CONTACT AREA: 0.076 μ m MIN. GOLD

SOLDER TAIL: 2.5um Sn-Pb

③ DIM "X"

4.25 $\pm$ 1	3.5 $\pm$ 1	5.0 $\pm$ 1
OTHERS	36,67	1,17,34,35,51,68

4. RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX)AND HEXNUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

⑤ SOLDER TAIL KEY/PCB LAYOUT:

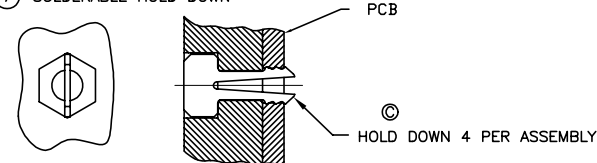
R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6

SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7

SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

6. BOARD KEEP OUT ZONE- PAGE 9



⑦ SOLDERABLE HOLD DOWN



8. PRODUCT SPEC:110-263

mat'l. code	surface ISO1302	tolerance ISO1101 ISO406	projection ④	product family MCS
ltn ecn nodr	date	tolerances unless otherwise specified	MM	5V EJECT HEADER ASSY
N		angle 0° $\pm$ 2'	scale 1:1	
		dr D.SHEAFFER 11/17/94		dwg no
		enr D.BRANN 12/7/94		sheet 2 of 9
		chr D.BRANN 12/7/94		size A4
		appd D.BRANN 12/7/94		type Product Customer Drawing
sheet index	revision sheet			

DESCRIPTION: ABOVE P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ⑥	EJ. MECHANISM ASSY 95079-XXXX ⑦	SOLDERABLE HOLD DOWN ④	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS
000CALF	RIGHT	R/A	0.0	000LF	00CA			
000CAHLF ⑩	RIGHT	R/A	0.0	000LF	00CA	93925-001		
001CALF	RIGHT	SMT-STG	0.0	001LF	00CA			
002CALF	RIGHT	SMT-IL	0.0	002LF	00CA			
020CALF	RIGHT	R/A	2.0	040LF	02CA			
040CALF	RIGHT	R/A	4.0	010LF	04CA			
050CALF	RIGHT	R/A	5.0	020LF	05CA			
050CAHLF ⑩	RIGHT	R/A	5.0	020LF	05CA	93925-004		
100CALF	LEFT	R/A	0.0	000LF	10CA			
100CAHLF ⑩	LEFT	R/A	0.0	000LF	10CA	93925-001		
101CALF	LEFT	SMT-STG	0.0	001LF	10CA			
102CALF	LEFT	SMT-IL	0.0	002LF	10CA			
120CALF	LEFT	R/A	2.0	040LF	12CA			
140CALF	LEFT	R/A	4.0	010LF	14CA			
150CALF	LEFT	R/A	5.0	020LF	15CA			
005CALF	RIGHT	R/A	0.0	005LF	00CA			95620-000CALF or -100CALF
025CALF	RIGHT	R/A	0.0	045LF	00CA			95620-020CALF or -120CALF
105CALF	LEFT	R/A	0.0	005LF	10CA			95620-000CALF or -100CALF
125CALF	LEFT	R/A	0.0	045LF	10CA			95620-020CALF or -120CALF

NOTES:

1. MATERIAL:
1.1 HEADER ASSY:
PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK - ABOVE PCB
HIGH TEMPERATURE THERMOPLASTIC UL94V-0 (WHITE) - BELOW PCB

- PIN: PHOSPHOR BRONZE
1.2 EJECT MECHANISM ASSY:
PLASTIC GUIDE: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PLASTIC PUSH-ROD BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
COVER PLATE, EJECT PLATE, LINK ARM,
PUSH ROD: STAINLESS STEEL
EMI CONTACT: PHOSPHOR BRONZE

2. FINISH (PIN)
UNDER PLATING: 0.5um Ni
CONTACT AREA: 0.076 µm MIN. GOLD

- SOLDER TAIL: 2.5um Sn-Pb
③ DIM "X"
- | | | |
|---------|--------|------------------|
| 4.25±.1 | 3.5±.1 | 5.0±.1 |
| OTHERS | 36,67 | 1,17,34,35,51,68 |

4. RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX) AND
HEXNUTS (92869-001), RECOMMENDED SCREW TORQUE: 1.0 TO
1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

- ⑤ SOLDER TAIL KEY/PCB LAYOUT:
R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

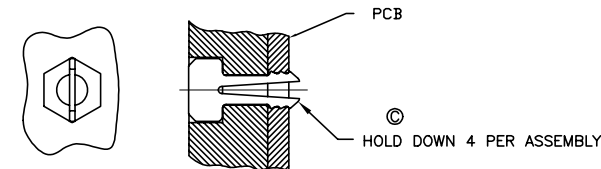
- 6 IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
SOLDER TAIL : SMT-IL, SMT-STG CAN RESIST 40 SECONDS IN A CONVECTION,
INFRA-RED OR VAPOR PHASE REFLOW OVEN.
SOLDER TAIL : R/A CAN RESIST 10 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.

- 7 IF LEAD FREE P/N. THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DISCRIBLED IN GS-22-008

- 8 LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION

9. BOARD KEEP OUT ZONE- PAGE 9



⑩ SOLDERABLE HOLD DOWN



11. PRODUCT SPEC:110-263

mat'l. code		surface		tolerance		projection		product family	
ISO1302		ISO1101		ISO406		MM		MCS	
l t r e c n n o d r		date		tolerances unless otherwise specified		title			
N				0.X±0.3		MM		5V EJECT HEADER ASSY	
				0.XX±0.13		scale 1:1			
				0'±2"					
				dr D.SHEAFFER		11/17/94		dwg no	
				enr D.BRANN		12/7/94		sheet 3 of 9	
				chr D.BRANN		12/7/94		95620	
				appd D.BRANN		12/7/94		A4	
								type Product Customer Drawing	
sheet		revision							
index		sheet							

DESCRIPTION: BELOW P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ④	EJ. MECHANISM ASSY 95079-XXXX ③	SOLDERABLE HOLD DOWN (4) ②	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS
500CA	RIGHT	R/A	0.0	500	10CA			
500CAH	RIGHT	R/A	0.0	500	10CA	93925-001		
501CA	RIGHT	SMT-STG	0.0	501	10CA			
502CA	RIGHT	SMT-IL	0.0	502	10CA			
503CA	RIGHT	SMT-IL	0.0	503	10CA			NO BOARD LOCATORS
520CA	RIGHT	R/A	2.0	540	12CA			
540CA	RIGHT	R/A	4.0	510	14CA			
550CA	RIGHT	R/A	5.0	520	15CA			
600CA	LEFT	R/A	0.0	500	00CA			
601CA	LEFT	SMT-STG	0.0	501	00CA			
602CA	LEFT	SMT-IL	0.0	502	00CA			
620CA	LEFT	R/A	2.0	540	02CA			
640CA	LEFT	R/A	4.0	510	04CA			
650CA	LEFT	R/A	5.0	520	05CA			
505CA	RIGHT	R/A	0.0	505	10CA			95620-500CA or -600CA
525CA	RIGHT	R/A	0.0	545	10CA			95620-520CA or -620CA
605CA	LEFT	R/A	0.0	505	00CA			95620-500CA or -600CA
625CA	LEFT	R/A	0.0	545	00CA			95620-520CA or -620CA

NOTES:

1. MATERIAL:

1.1 HEADER ASSY:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK - ABOVE PCB
HIGH TEMPERATURE THERMOPLASTIC UL94V-0 (WHITE) - BELOW PCB
PIN: PHOSPHOR BRONZE

1.2 EJECT MECHANISM ASSY:

PLASTIC GUIDE: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PLASTIC PUSH-ROD BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
COVER PLATE, EJECT PLATE, LINK ARM,
PUSH ROD: STAINLESS STEEL
EMI CONTACT: PHOSPHOR BRONZE

2. FINISH (PIN)

UNDER PLATING: 0.5um Ni
CONTACT AREA: 0.076 µm MIN. GOLD

SOLDER TAIL: 2.5um Sn-Pb

③ DIM "X"

4.25±.1	3.5±.1	5.0±.1
OTHERS	36,67	1,17,34,35,51,68

4. RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX) AND HEXNUTS (92869-001), RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

⑤

SOLDER TAIL KEY/PCB LAYOUT:



R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

6. BOARD KEEP OUT ZONE-PAGE 9

7. PRODUCT SPEC:110-263

mat'l. code	surface ISO1302	tolerance ISO1101 ISO406	projection ④	product family MCS
l t r e c n n o d r	date	tolerances unless otherwise specified	MM	title 5V EJECT HEADER ASSY
N		angle 0°±2'	scale 1:1	
		dr D.SHEAFFER 11/17/94		dwg no sheet 4 of 9 size
		enr D.BRANN 12/7/94		95620 A4
		chr D.BRANN 12/7/94		type Product Customer Drawing
		appd D.BRANN 12/7/94		
sheet index	revision sheet			

DESCRIPTION: BELOW P.C.B., DECK AND PUSH-ROD LOCATION ARE AS VIEWED BY USER.

PRODUCT NO. 95620-XXXX	PUSH ROD LOCATION	SOLDER TAIL ⑤	STAND-OFF HEIGHT DIM "L"	EJ. HEADER ASSY 92140-XXX ④	EJ. MECHANISM ASSY 95079-XXXX ⑥	SOLDERABLE HOLD DOWN ④	MOUNTING STYLE TO PCB AND PUSH-ROD LOCATION	USED WITH/COMMENTS
500CALF	RIGHT	R/A	0.0	500LF	10CA			
500CAHLF	RIGHT	R/A	0.0	500LF	10CA	93925-001		
501CALF	RIGHT	SMT-STG	0.0	501LF	10CA			
502CALF	RIGHT	SMT-IL	0.0	502LF	10CA			
503CALF	RIGHT	SMT-IL	0.0	503LF	10CA			NO BOARD LOCATORS
520CALF	RIGHT	R/A	2.0	540LF	12CA			
540CALF	RIGHT	R/A	4.0	510LF	14CA			
550CALF	RIGHT	R/A	5.0	520LF	15CA			
600CALF	LEFT	R/A	0.0	500LF	00CA			
601CALF	LEFT	SMT-STG	0.0	501LF	00CA			
602CALF	LEFT	SMT-IL	0.0	502LF	00CA			
620CALF	LEFT	R/A	2.0	540LF	02CA			
640CALF	LEFT	R/A	4.0	510LF	04CA			
650CALF	LEFT	R/A	5.0	520LF	05CA			
505CALF	RIGHT	R/A	0.0	505LF	10CA			95620-500CA or -600CA
525CALF	RIGHT	R/A	0.0	545LF	10CA			95620-520CA or -620CA
605CALF	LEFT	R/A	0.0	505LF	00CA			95620-500CA or -600CA
625CALF	LEFT	R/A	0.0	545LF	00CA			95620-520CA or -620CA

NOTES:

1. MATERIAL:

1.1 HEADER ASSY:

PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK - ABOVE PCB
HIGH TEMPERATURE THERMOPLASTIC UL94V-0 (WHITE) - BELOW PCB
PIN: PHOSPHOR BRONZE

1.2 EJECT MECHANISM ASSY:

PLASTIC GUIDE: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
PLASTIC PUSH-ROD BUTTON: HIGH TEMPERATURE THERMOPLASTIC UL94V-0 BLACK
COVER PLATE, EJECT PLATE, LINK ARM,
PUSH ROD: STAINLESS STEEL
EMI CONTACT: PHOSPHOR BRONZE

2. FINISH (PIN)

UNDER PLATING: 0.5um Ni
CONTACT AREA: 0.076 μ m MIN. GOLD

SOLDER TAIL: 2.5um Sn-Pb

③ DIM "X"

4.25 $\pm$ 1	3.5 $\pm$ 1	5.0 $\pm$ 1
OTHERS	36,67	1,17,34,35,51,68

4. RECOMMENDED HOLD DOWN - 2mm SCREWS (95121-XXX) AND HEXNUTS (92869-001). RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs. (1.2-1.7 cm-kgs).

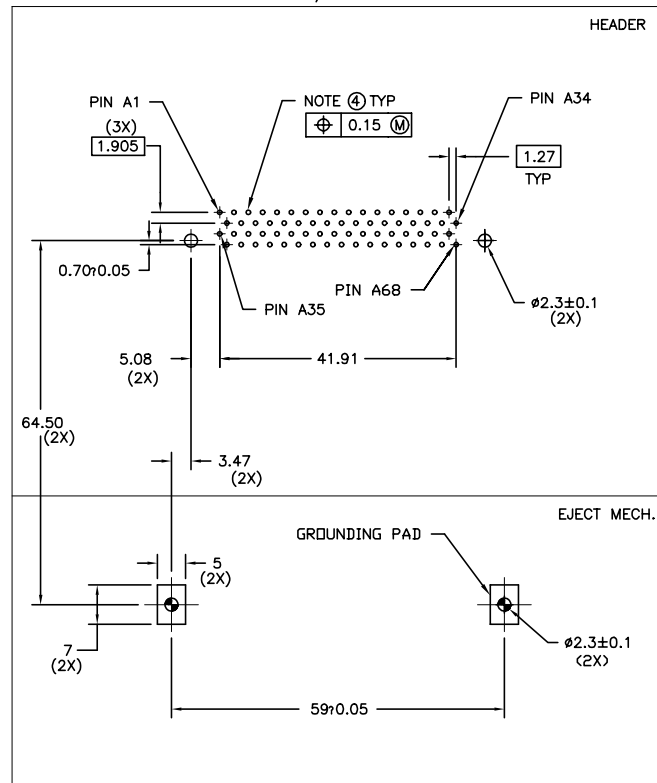
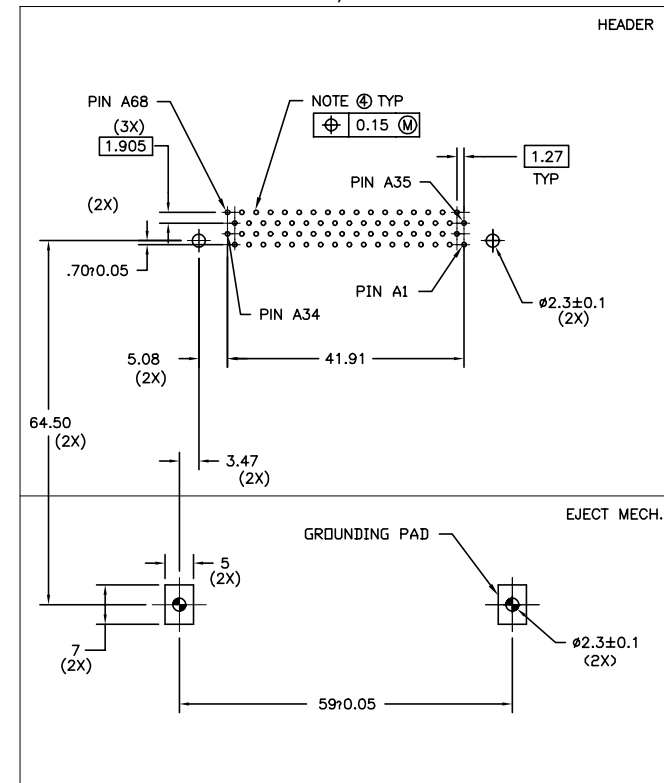
⑤ SOLDER TAIL KEY/PCB LAYOUT:
R/A = RIGHT ANGLE PIN-THROUGH-HOLE-PAGE 6
SMT-STG = STAGGERED SURFACE MOUNT-PAGE 7
SMT-IL = SURFACE MOUNT IN-LINE (SINGLE ROW)-PAGE 8

6. BOARD KEEP OUT ZONE-PAGE 9

- 7 IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE
SOLDER TAIL : SMT-IL, SMT-STG CAN RESIST 40 SECONDS IN A CONVECTION,
INFRA-RED OR VAPOR PHASE REFLOW OVEN.
SOLDER TAIL : R/A CAN RESIST 10 SECONDS IN A WAVE SOLDER APPLICATION
WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.
- 8 IF LEAD FREE P/N. THE PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATIONS AS DISCRIBLED IN GS-22-008
- 9 LEAD FREE P/N PACKAGING MEETS GS-14-920 SPECIFICATION
- 10 PRODUCT SPEC:110-263

mat'l. code	surface ISO1302	tolerance ISO1101 ISO406	projection ④	product family MCS
ltn ecn nodr date	tolerances unless otherwise specified	angle 0° $\pm$ 2'	MM	title 5V EJECT HEADER ASSY
N	0.X $\pm$ 0.3	dr D.SHEAFFER 11/17/94	scale 1:1	dwg no 95620
	0.XX $\pm$ 0.13	enr D.BRANN 12/7/94		sheet 5 of 9
	0.XXX $\pm$ 0.051	chr D.BRANN 12/7/94		size A4
		appd D.BRANN 12/7/94		type Product Customer Drawing
sheet index	revision sheet			

Single Mount Right Angle

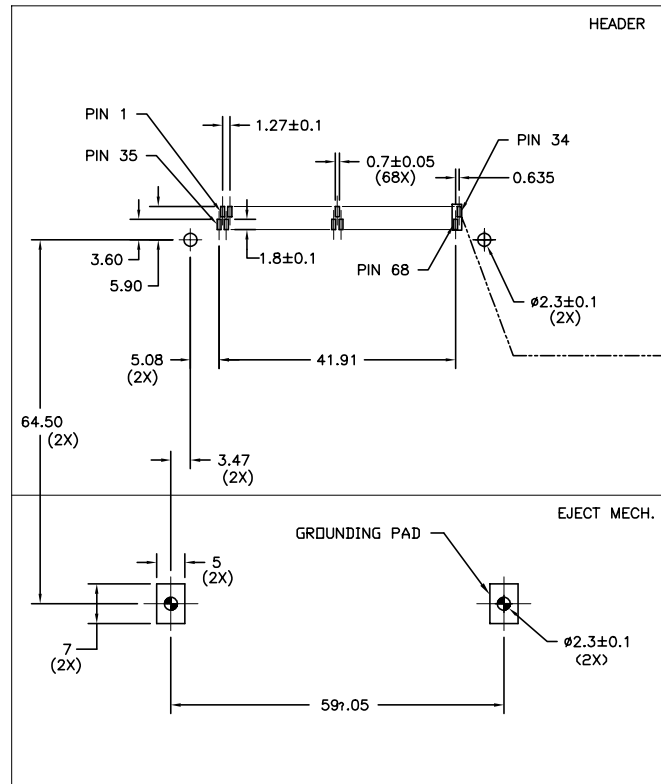
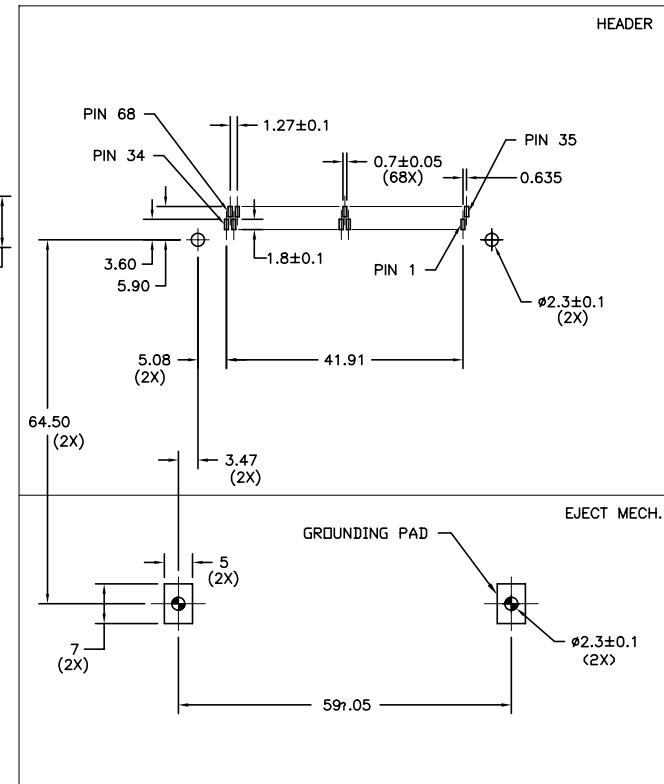
FIGURE "A"
TOP MOUNT HEADER/MECH. PCB LAYOUTBOARD VIEW FROM CONNECTOR MOUNTED SIDE
TOP OF BOARD IN APPLICATIONFIGURE "B"
BOTTOM MOUNT HEADER/MECH. PCB LAYOUTBOARD VIEW FROM CONNECTOR MOUNTED SIDE
BOTTOM OF BOARD IN APPLICATION

NOTES:

- 1 ALL TOLERANCES ± 0.15 UNLESS NOTED.
- 2 KEEP-OUT ZONE FOR HEADERS W/STAND-OFF OPTIONS SEE SHEET 9 FIGURE A.
- 3 KEEP-OUT ZONE FOR HEADERS W/O STAND-OFF OPTIONS SEE SHEET 9 FIGURE B.
- ④ RECOMMENDED DIAMETER IS $\phi 1.0$.
FOR PROCESSES USING PASTE REFLOW, HOLE MAY BE
AS SMALL AS $\phi 0.79$

mat'l. code				surface		tolerance		projection		product family	
ISO1302				ISO1101		ISO406		MM		MCS	
tolerances unless otherwise specified				0.X±0.3		0.XX±0.13		scale 1:1		5V EJECT HEADER ASSY	
0°±2'				0.XXX±0.051							
dr				D.SHEAFFER		11/17/94		dwg no		sheet 6 of 9	
engr				D.BRANN		12/7/94		95620		A4	
chr				D.BRANN		12/7/94		type		Product Customer Drawing	
appd				D.BRANN		12/7/94					
sheet				revision							
index				sheet							

Surface Mount 2-Row

FIGURE "A"
TOP MOUNT HEADER/MECH. PCB LAYOUTBOARD VIEW FROM CONNECTOR MOUNTED SIDE
TOP OF BOARD IN APPLICATIONFIGURE "B"
BOTTOM MOUNT HEADER/MECH. PCB LAYOUTBOARD VIEW FROM CONNECTOR MOUNTED SIDE
BOTTOM OF BOARD IN APPLICATION

NOTES:

- 1 ALL TOLERANCES ± 0.15 UNLESS NOTED.
- 2 KEEP-OUT ZONE FOR ASSEMBLIES SHOWN ON SHEET 9 FIGURE B.

mat'l. code	surface	tolerance	projection	product family
ISO1302	ISO1101	ISO406	MM	MCS
date	tolerances unless otherwise specified	scale 1:1	5V EJECT HEADER ASSY	
dr	D.SHEAFFER	11/17/94	dwg no	sheet 7 of 9
enr	D.BRANN	12/7/94	95620	A4
chr	D.BRANN	12/7/94	type	Product Customer Drawing
appd	D.BRANN	12/7/94		
sheet index	revision sheet			

Printed: Apr 28, 2012

Board Keep Out Zone (NOT INCLUDING HEADER)

FIGURE "A"
KEEP OUT ZONE FOR STANDOFF VERSION

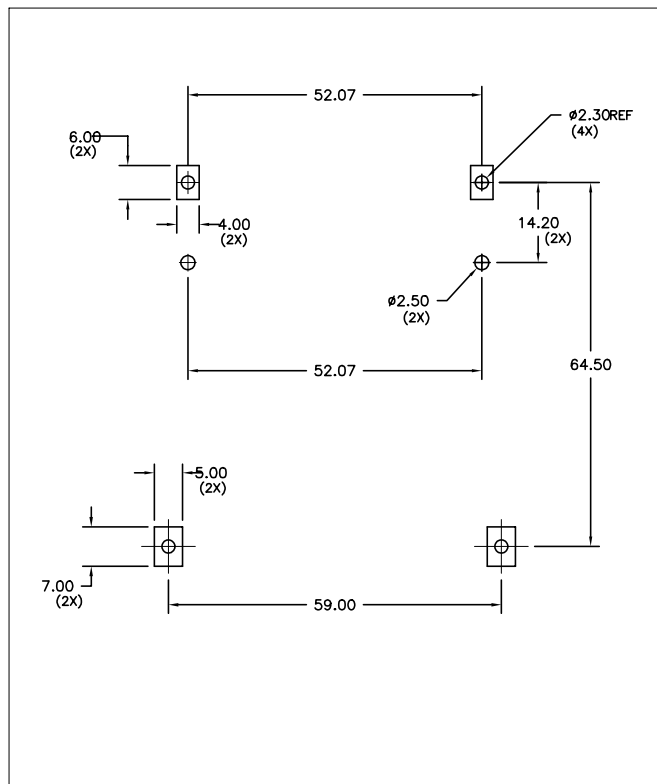
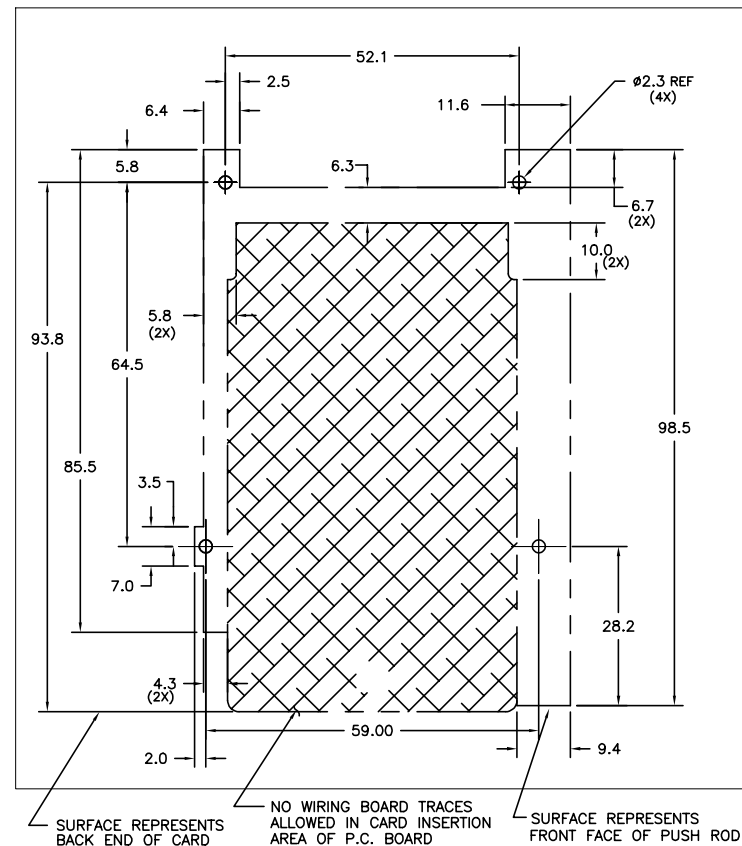


FIGURE "B" NOTE 1
KEEP OUT ZONE FOR NO STANDOFF VERSION
RIGHT HAND PUSHROD VERSION SHOWN
MIRROR IMAGE FOR LEFT HAND PUSHROD



NOTES:

- ① ALL DIMENSIONS SHOWN ARE NOMINAL AND DEFINE THE OUTSIDE SURFACES OF THE ASSEMBLY. A MINIMUM OF 0.25mm (0.010") CLEARANCE BETWEEN THE ASSEMBLY AND ANY COMPONENTS IS SUGGESTED.

mat'l. code	surface	tolerance	projection	product family
	ISO1302	ISO1101 ISO406		MCS
l t r e c n n o d r	date	tolerances unless otherwise specified		title
N		0.X±0.3	MM	5V EJECT HEADER ASSY
		0.XX±0.13		
		0.XXX±0.051	scale 1:1	
dr	D.SHEAFFER	11/17/94		dwg no
engr	D.BRANN	12/7/94		sheet 9 of 9
chr	D.BRANN	12/7/94		size
appd	D.BRANN	12/7/94		A4
sheet	revision			type
index	sheet			Product Customer Drawing

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com