

HEYCO



Heyco® Reducer Snap Bushings

Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)


Mounting Hole Diameter Range: .375" (9,5 mm) to 2.0" (50,8 mm)

- **Reduce hole size** and convert raw-edged holes to smooth, neat, insulated holes.
- Insulate and mechanically protect electrical and telecommunications cables, tubing, hose, rope, and utility lines.
- Provide a neater look where cable O.D. to bushing I.D. clearance is minimized.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Withstand a push back force of 35 pounds.
- Available in multiple sizes for use in .375" (9,5 mm) to 2.0" (50,8 mm) diameter holes.

MOUNTING HOLE DIAMETER		PART NO.		DESCRIPTION	PART DIMENSIONS					
in.	mm.	Black	White		A Reduced Inside Diameter*		B Head Diameter		C Overall Height	
					in.	mm.	in.	mm.	in.	mm.
.375	9,5	2020	2021	SB 375-3	.187	4,8	.468	11,9	.406	10,3
.437	11,1	2042	2037	SB 437-243	.243	6,2	.531	13,5	.406	10,3
		2038	2039	SB 437-4	.270	6,8				
.500	12,7	2058	2059	SB 500-4	.250	6,4	.570	14,5	.406	10,3
		2049	2050	SB 500-5	.312	7,9				
.562	14,3	2060	2061	SB 562-5	.312	7,9	.656	16,7	.406	10,3
		2063	2064	SB 562-6	.391	9,9				
.625	15,9	2075	2078	SB 625-4	.250	6,4	.718	18,2	.406	10,3
		2070	2071	SB 625-7	.440	11,1				
.687	17,4	2083	2084	SB 687-8	.500	12,7	.781	19,8	.406	10,3
		2090	2091	SB 750-6	.391	9,9				
.750	19,1	2092	2099	SB 750-8	.500	12,7	.850	21,6	.406	10,3
		2093	2094	SB 750-9	.562	14,3				
		2100	2101	SB 812-9	.562	14,3	.890	22,6	.406	10,3
.875	22,2	2110	2111	SB 875-6	.375	9,5				
		2113	2114	SB 875-7	.437	11,1				
		2116	2117	SB 875-8	.500	12,7		.953	24,2	.453
		2120	2121	SB 875-9	.562	14,3				
		2123	2124	SB 875-10	.625	15,9				
1.093-	27,8-	2160	2161	SB 1093-13	.812	20,6	1.218	30,9	.453	11,5
1.125	28,6	2163	2164	SB 1093-14	.875	22,2				
1.250	31,8	2198	2199	SB 1250-15	.937	23,8	1.359	34,5	.453	11,5
1.375	34,9	2207	2208	SB 1375-14	.875	22,2	1.490	37,3	.453	11,5
1.500	38,1	2233	2234	SB 1500-17	1.062	27,0	1.609	40,9	.453	11,5
		2236	2237	SB 1500-18	1.125	28,6				
2.000	50,8	2400	2401	SB 2000-26	1.640	41,6	2.125	54,0	.453	11,5

Standard colors black and white. Consult Heyco for other colors.

*Reduced inside diameters. For our complete line of Snap Bushings, see pages 5-1 & 5-2.

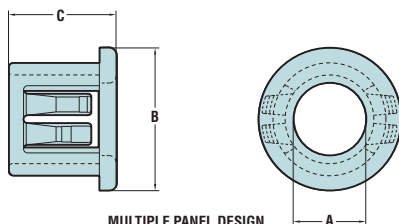

MULTIPLE PANEL DESIGN

*Quick
Specs*

Material	Nylon 6/6
Certifications	Recognized under the Component Program of Underwriters' Laboratories, File E15331 Certified by Canadian Standards Association, File 8919
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)—Maximum temperature on part not to exceed 221°F (105°C)

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com