

HEYCO




Heyco-Flex™ Liquid Tight Conduit Fittings

Straight-Thru, Snap-In Hubs

For Flexible, Nonmetallic Liquid Tight Heyco-Flex™ I Conduit and Heyco-Flex™ II Tubing

FITS CONDUIT/TUBING TRADE SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS									
			A Mounting Hole Dia.		B Max O.A. Length		C Body Length		D Nut Thk.		E Wrenching Flat Size	
	Black		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
1/4	8382	HFC 1/4-S	.500	12,7	1.500	38,1	.445	11,3	.219	5,6	.875	22,2
3/8	8384	HFC 3/8-S	.875	22,2	2.000	50,8	.625	15,9	.250	6,3	1.328	33,7
1/2	8386	HFC 1/2-S										
3/4	8388	HFC 3/4-S	1.090	27,7	2.031	51,6	.625	15,9	.250	6,3	1.562	39,7
1	8390	HFC 1-S	1.375	34,9	2.250	57,1	.781	19,8	.250	6,3	1.812	46,0

Standard color black.

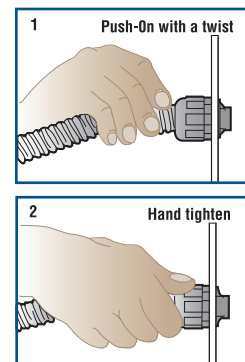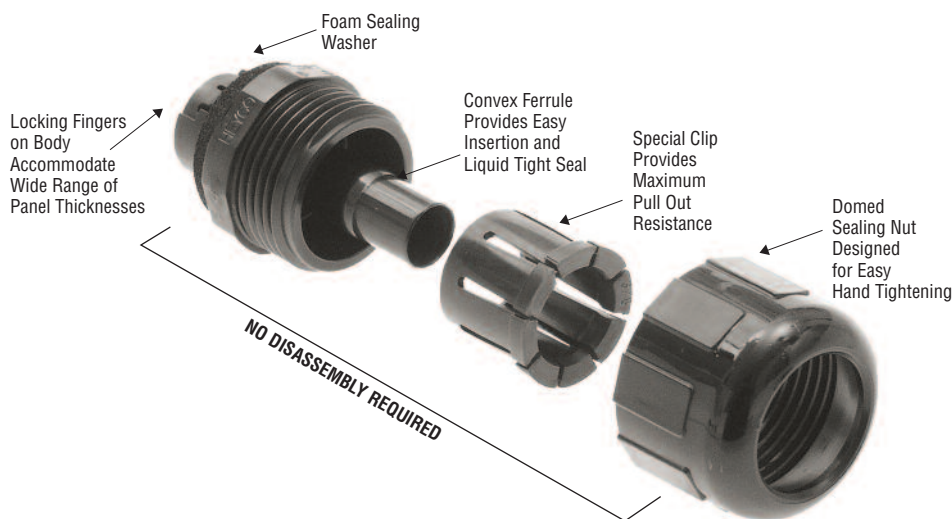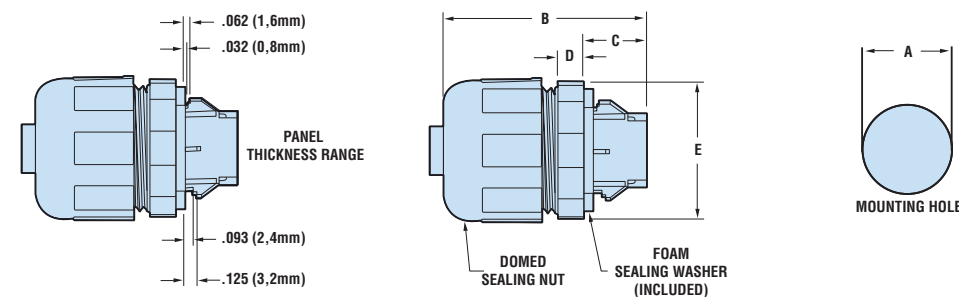

Material	Nylon 6/6
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E28430 CSA Certified by Canadian Standards Association File 84579 and 81067
Flammability Rating	94V-2
Material Temperature Index	Maximum temperature on part not to exceed 221°F (105°C)
IP Rating	IP 68 up to 70 psi (5 bar) water pressure

Quick Specs

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com