




FRONT SHELL

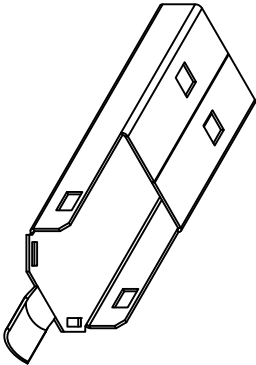








INSERTED BODY



REAR SHELL



ASSEMBLED PLUG

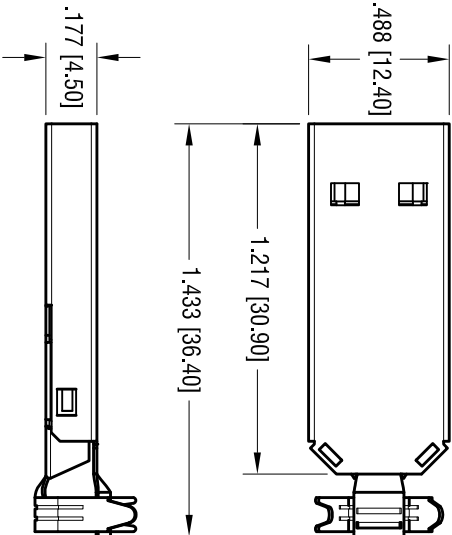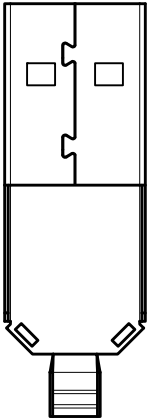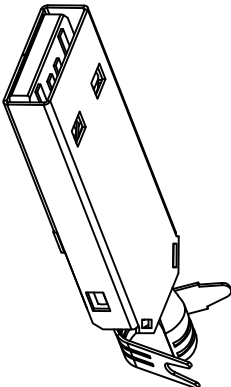

PLUG SPECIFICATIONS:

- SHELL: MAT'L- STEEL
- FINISH- NICKEL PLATE
- INSULATION: MAT'L- THERMOPLASTIC, UL 94V-0
- CONTACT: MAT'L- PHOSPHOR BRONZE
- FINISH- GOLD FLASH OVER NICKEL

ELECTRICAL CHARACTERISTICS:

- RATED VOLTAGE: 30V (RMS)
- CONTACT CURRENT RATING: 1 Amp DC MAX.
- CONTACT RESISTANCE: 15m Ω min.
- DIELECTRIC WITHSTANDING VOLTAGE: 750V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
- OPERATING TEMPERATURE: -13°F (-25°C) TO 176°F (+80°C)
- DURABILITY: 1500 CYCLES MIN.

KEYSTONE ELECTRONICS CORP.				
www.keystelco.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900				
PART NAME				
USB 3.0 TYPE A PLUG KIT				
MATERIAL				
AS NOTED				
FINISH		DRN BY		
AS NOTED		NT		DATE
		APP'D	LN	4.07.10
TOLERANCES		DWG NO.		
DECIMAL	± .010 [± 0.25]	947		
ANGULAR	± 1°			
UNLESS OTHERWISE SPECIFIED				

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com