

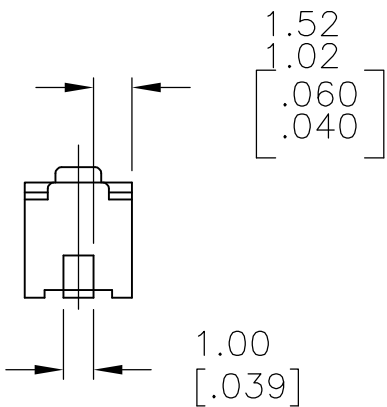
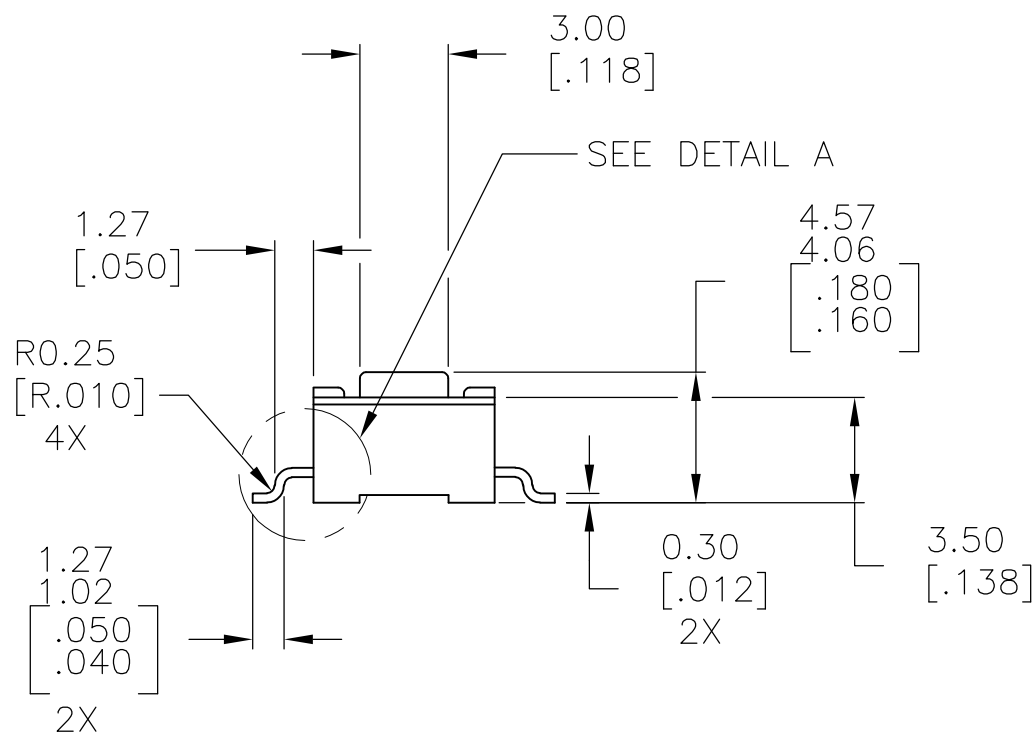
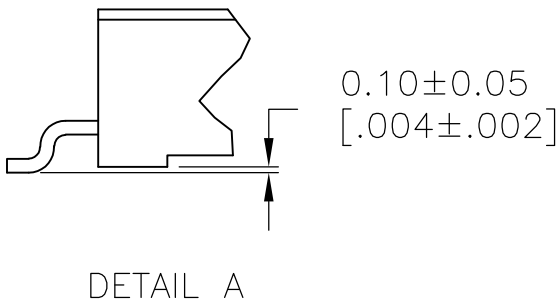
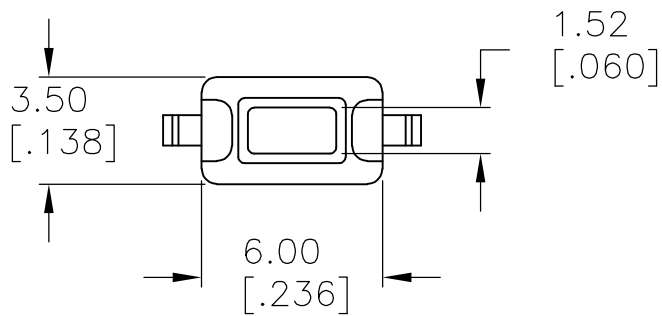


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		C2	REVISED PER ECO-14-012660	19AUG2014	NK	RH

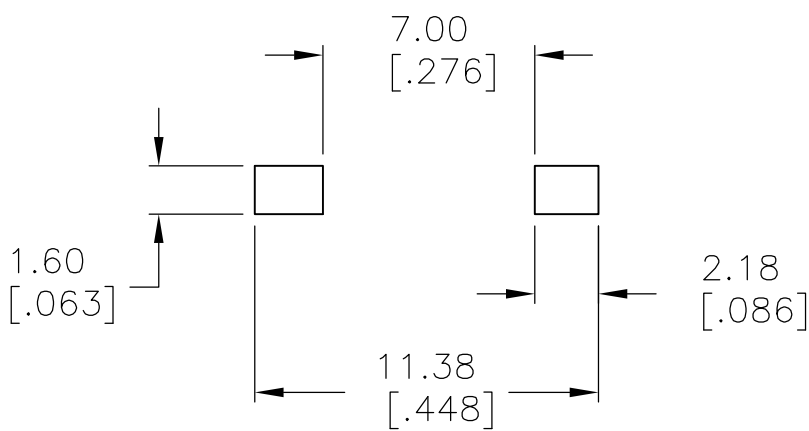

CIRCUIT DIAGRAM

NOTE: TERMINAL NUMBERS ARE FOR REFERENCE ONLY AND DO NOT APPEAR ON SWITCHES.



RECOMMENDED FOOTPRINT

SPECIFICATIONS:

MATERIALS:
CASE: NYLON 46, G30, BROWN
COVER: STAINLESS STEEL
ACTUATOR BUTTON: PPS, BLACK.
MOVING CONTACT: 301 STAINLESS STEEL, 20μ” Ag CLAD.
FIXED CONTACT/TERMINALS: BRASS, 40μ”, Ag PLATE.

ELECTRICAL:
MAX CONTACT RATING: 50MILLIAMPS@24V DC
MIN CONTACT RATING: 10MICROAMPS@1V DC
INITIAL CONTACT RESISTANCE: 100 MILLIOHMS MAX.
INSULATION RESISTANCE: 500 MEGOHMS MIN @ 500 VDC.
DIELECTRIC STRENGTH: 500 VAC 50/60 Hz FOR 1 MINUTE
LIFE EXPECTANCY: 20,000 CYCLES MIN.

MECHANICAL:
ACTUATION FORCE: SEE TABLE
ACTUATION TRAVEL: 0.25mm [.010”] APPROX.

ENVIRONMENTAL:
OPERATING TEMPERATURE: -35°C TO +85°C
STORAGE TEMPERATURE: -35°C TO +85°C
SOLDER HEAT RESISTANCE PER 109-201, COND B
SOLDERABILITY SPEC EIA-364-52, CLASS 1, CATEGORY 2

NOTES:

- ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).
- SUBCONTRACTOR TO NOTE PART NUMBER MANUFACTURING LOT NUMBER AND QUANTITY ON EACH PACKAGE.
- PARTS ARE TO BE COMMERCIALY FREE OF ALL BURRS (MAX. OF 5% OF MATERIAL THICKNESS). NO LOOSE BURRS PERMITTED.
- TERMINAL TO BE FLUSH TO THE CASE BOTTOM, SEE DETAIL A.

180 ±50 gm.	FSMSMTR	1437566-4
180 ±50 gm.	FSMSM	1437566-3
ACTUATION FORCE	OLD T&B PART NUMBER	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	12FEB96	TE Connectivity			
		CHK	-				
DIMENSIONS: mm [INCHES]		APVD	23FEB96	NAME			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		FSMSM PUSHBUTTON SWITCH			
		0 PLC ± -		SIZE			
		1 PLC ± -		CAGE CODE			
		2 PLC ± 0.30[.012]		DRAWING NO			
		3 PLC ± -		RESTRICTED TO			
		4 PLC ± -		A2 00779 C=1437566-3			
		ANGLES ± 1°		SCALE			
MATERIAL		FINISH		SHEET			
SEE SPECIFICATIONS		SEE SPECIFICATIONS		1 OF 1			
				REV			
				C2			
				CUSTOMER DRAWING			
				4:1			

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692

Email amall@ameya360.com

QQ 800077892

Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333

Email mkt@ameya360.com