


I02 Series High Current Power Inductor

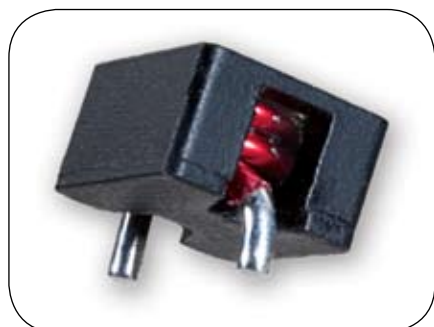

Features


- High Saturation Current to 60A
- DCR as low as 0.60mΩ
- High Energy Storage in a Compact Package
- Lower DCR than similar Toroid Design

Applications


- Desktop CPUs
- Servers
- VRMs
- DC/DC Converters

Packaging Tray =130 pieces, Box = 16 trays, Box = 2080 pieces

Mechanical




Top View




Side View

Suggested PCB layout



Top View

Schematic



unit: mm

Electrical Specifications

Part Number	Inductance ¹ (uH,+/-10%)	DCR (mΩ)		I_{sat}^5 (A)	I_{dc}^6 (A)	Dimensions		
		Typ.	Max.			X	Y	Z
I02-221-1	0.22	0.45	0.60	60+	45	12.5	16.0	2.2
I02-351-1	0.35	0.45	0.60	55	45	12.5	16.0	2.2
I02-451-1	0.45	1.10	1.45	50	29	12.7	15.7	1.6
I02-601-1	0.60	1.10	1.45	45	29	12.7	15.7	1.6
I02-801-1	0.80	2.10	2.40	44	23	10.0	13.0	1.3
I02-102-1	1.0	2.10	2.40	35	23	10.0	13.0	1.3
I02-132-1	1.3	2.55	3.00	34	19	11.0	14.0	1.3
I02-152-1	1.5	2.55	3.00	25	19	11.0	14.0	1.3
I02-182-1	1.8	2.55	3.00	20	19	11.0	14.0	1.3

1. Tested at 100 kHz, 0.1Vrms, 0 Adc bias.
2. Electrical specifications at 25°C.
3. Operating range: -40°C to +125°C.
4. Meets UL 94V-0.
5. Idc is DC current required to produce a temperature rise of 40°C.
6. Isat is the DC current required to reduce the nominal inductance by 15%.
7. RoHS compliant parts.



AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com