
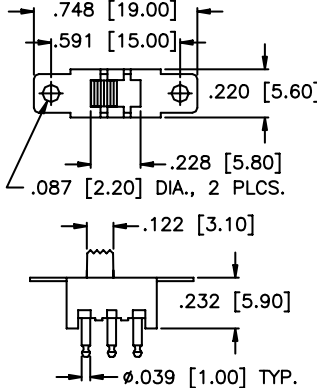
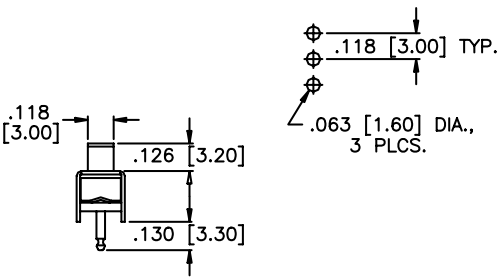

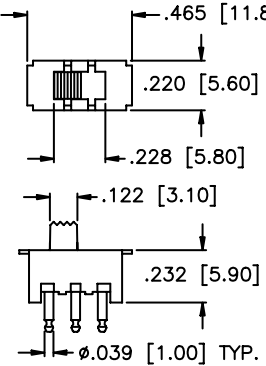
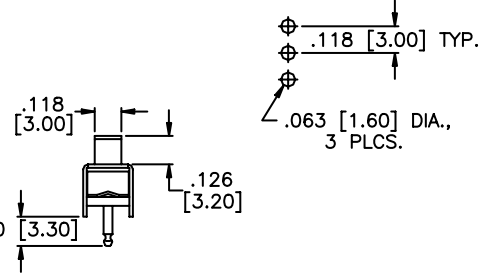

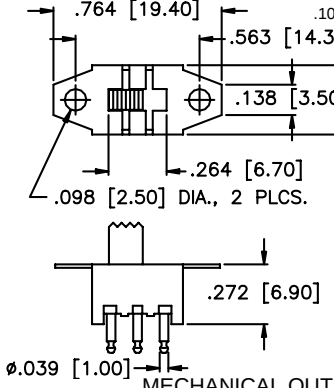
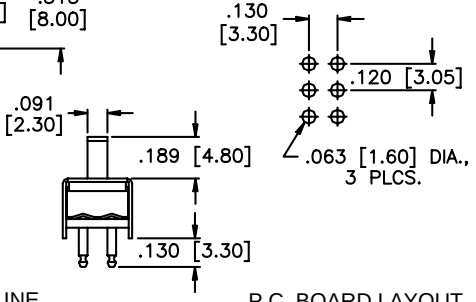


SLA Series

Miniature Slide Switches

SPECIFICATIONS	FEATURES
Contact ratings: 500 mA at 125 VAC Initial contact resistance: 20 milliohms max. Insulation resistance: 100 megohms min. at 500 VDC Dielectric strength: 500 volts RMS for 1 minute Electrical life: 10,000 cycles min. Operating temperature range: -20°C to +85°C Actuation force: 350g ± 200g Solder heat resistance: 260°C max. for 3 seconds Solvent washing permissible	● Miniature compact size. ● Wash-through open frame construction. ● Panel and p.c. mounting models.
	MATERIALS
	Contacts & terminals: Silver plated brass Frame: Zinc plated steel Actuator: PBT Thermoplastic Base: Phenolic laminated sheet

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE


MODEL NO. SLA1200 	1P2T  ● = COMMON  SCHEMATIC MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLA1201 	1P2T  ● = COMMON  SCHEMATIC MECHANICAL OUTLINE  P.C. BOARD LAYOUT
MODEL NO. SLA2200 	2P2T  ● = COMMON  SCHEMATIC MECHANICAL OUTLINE  P.C. BOARD LAYOUT

MODEL NO.


SLA2201




2P2T



SCHEMATIC

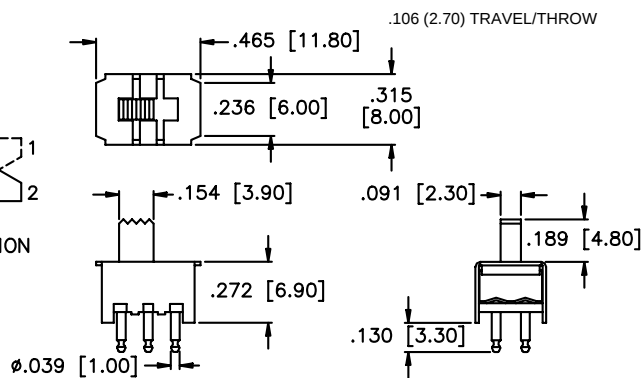

MECHANICAL OUTLINE



P.C. BOARD LAYOUT

AMEYA360

Components Supply Platform

Authorized Distribution Brand :



Website :

Welcome to visit www.ameya360.com

Contact Us :

➤ Address :

401 Building No.5, JiuGe Business Center, Lane 2301, Yishan Rd
Minhang District, Shanghai , China

➤ Sales :

Direct +86 (21) 6401-6692
Email amall@ameya360.com
QQ 800077892
Skype ameyasales1 ameyasales2

➤ Customer Service :

Email service@ameya360.com

➤ Partnership :

Tel +86 (21) 64016692-8333
Email mkt@ameya360.com